

Fields of expertise

- Compact, robust and powerful hand-held measurement technology „Made in Germany“
- Extensive product range for a wide variety of measured values
- Application-oriented special measuring devices
- Private-label products for customer-specific individualisation
- On customer request, factory calibration in our in-house calibration laboratory
- Tailor-made sensor designs from our state-of-the-art in-house sensor manufacturing organisation
- Price-conscious displays and regulators
- Hand-held devices and sensors with high system accuracy
- Quick measuring systems based on thermocouples and Pt100/Pt1000 elements
- EASYBus system for simple network
- Temperature sensors for hygienic applications
- Solutions for hazardous areas (ATEX)



dystybutur:

Scuba Mission Rafał Kowalewski
ul. Mazurska 7
70-424 Szczecin, Poland
tel./fax + 48 91 488 17 87
www.scubamission.pl
info@scubamission.pl

Catalog prices effective from 01.01.2018 | Errors, changes and price adjustments excepted. | All prices exclude shipping and sales tax.
Our terms and conditions can be found in the internet at www.ghm-group.de/agb/.



Professional Measurement Measuring | Controlling | Regulating

Product catalog 2018



dystybutur:

Scuba Mission Rafał Kowalewski
ul. Mazurska 7
70-424 Szczecin, Poland
tel./fax + 48 91 488 17 87
www.scubamission.pl
info@scubamission.pl

Members of GHM GROUP:

GREISINGER
HONSBERG
Martens
IMTRON
Delta OHM
VAL.CO

GREISINGER. Specialist for handheld devices.

„For more than thirty years, quality measuring devices from Greisinger have effectively met the needs of demanding customers. A mature measuring technology must also be accompanied by the ability to respond sensitively to the market.“



Roland Bäuml

Site Director Greisinger

Member of the Managing Board

GREISINGER
Member of GHM GROUP

Roland Bäuml

Further information see our website

<https://www.ghm-group.de/en/ghm-group/competence-center/greisinger/>

GHM GROUP. Specialists by Competence.



We measure and control it

The GHM GROUP has stood for precision measuring and control technology since 1963. Our customers enjoy the expertise and experience of a corporate group that has been cautiously built from smaller, very successful measuring technology manufacturers from Germany and northern Italy. As a medium-sized corporate group, we unite a depth of added value and knowledge based on 200 years of combined experience. From development of specialized measuring processes to the complete production of sensors and mechanical key elements to data loggers and firmware and software programming, we build measuring devices that cover a wide range of applications. The emphases of our solution are the growth areas of general machine construction, building technology, measurement data recording and communication, as well as the food production industry, meteorology, and general environmental measuring technology.

With a consistently focused customer orientation, modern company structures, and management that can react to market developments more quickly and with a more customer-oriented approach, we combine the expertise and professionalism of our more than 300 employees with the alertness and flexibility of a highly specialized task force.

As CEO, I personally, and on behalf of all of our employees, stand behind the promise of our corporate group to realize customer wishes quickly, professionally, and individually. After all, our customers' satisfaction is and remains the most important indicator of the quality of our solutions.

GHM GROUP – Specialists by Competence.

Johannes Overhues

CEO GHM Messtechnik GmbH & GHM GROUP

HONSBERG**1963**

Honsberg Instruments, Remscheid, Germany
As a traditional, family-operated company, Honsberg is one of the market leaders in flow measurement technology for cooling lubricant monitoring and other technical oils.

Delta OHM**1978**

Delta OHM, Padova, Italy
Market leader in Italy for the measurement variable light and noise; one of the world's most important manufacturers of high-precision environmental measuring technology; state-of-the-art calibration and research laboratories

GREISINGER**1980**

Greisinger electronic, Regensburg, Germany
Manufacturer of durable and extremely cost effective handheld measuring devices, sensors, and electronics; products are used in all areas of industry

VAL.CO**1982**

VAL.CO, Milan, Italy
Manufacturer of industrial sensors for fill, flow rate and temperature applications; specialist in the Italian and European market

IMTRON**1984**

Imtron Messtechnik, Owingen, Germany
Manufacturer of measurement data recording systems; development of test stands for the automotive industry and energy measurement technology with planned preventative maintenance

Martens**1988**

Martens Elektronik, Hamburg, Germany
Supplier of customer-specific industrial electronics and analysis technology; manufacturer of technologically high-quality measurement technology, also for the international market

Our company develops consistently. In one direction: towards the future



Innovation with method

The GHM Messtechnik GmbH Group was founded in 2009. However, the history of the traditional brands that are bundled under the umbrella brand goes back much further. In its current formation as the GHM GROUP, the enterprise is still obligated to the shared philosophy of the founders: Absolute customer orientation, speed, and first-class product quality!

Innovation with method: An increasing number of tasks in terms of the global economy and in technology reach the limits of feasibility and beyond. We meet this challenge with a broad-based enterprise structure. The Centers of Competence under the umbrella of the GHM GROUP

cover a wide range of market-specific solutions for all important areas of application with their respective areas of expertise.

With the GHM GROUP our customers benefit from over 200 years of combined experience. With this expertise, our engineers at the various "Centers of Competence" are quickly and flexibly in a position to develop solutions that meet the specific requirements of our customers and are in-line with market demand.

It is an advantage of our enterprise, which is unrivalled.



16 
WORLDWIDE LOCATIONS



> 40 Mio.
MILLION IN SALES
PER YEAR



> 2 000
HIGH-QUALITY
DEVICE TYPES



> 300
HIGHLY QUALIFIED AND
AMBITIOUS EMPLOYEES

HANDHELD INSTRUMENT

DISPLAY / CONTROLLER

LOGGER / BUS SYSTEMS

TRANSMITTER

TEMPERATURE PROBE

ALARM / PROTECTION, LEVEL



Firmengebäude

- High-quality measuring technology production products in the mid-range price segment
- Customer-specific adaptation or development of measuring technology products
- Design and delivery of OEM products
- Production entirely in Germany
- ISO calibration – including third-party devices
- Customer support from office staff and field staff
- Spare parts and repair service

QUALITY STANDARD AND CERTIFICATION

High-quality technical products at a fair price have made use a permanent fixture in the measuring device market. We have been on a continuously upward trend for more than 35 years. The use of state of the art machinery and devices with efficient, high-performance production processes enables the high 'Made in Germany' product quality at competitive prices.

All our products are developed and produced in Germany - that is one reason for the high-quality standard of our products. Our quality management system is certified according to ISO 9001:2008 and additionally for potentially explosive atmospheres according to DIN EN 13980:2003.

Conformity with Directive 94/9/EC ('ATEX Directive') has been mandatory for Ex products in the Member States of the EC since 01/07/2003. Our development, manufacturing and sales have been certified in accordance with Directive 94/9/EC since 01/05/2003. Several products have already been tested and approved in accordance with this standard.





Measurement data made obvious

Greisinger devotes a great deal of effort to compact designs. The specialist for handheld devices combines technology and measurement precision in products with substance.

As a Center of Competence for temperature sensors and handheld measuring devices as well as indicators and regulators, the Greisinger location in Regensburg bundles the extensive know-how of experienced specialists under one roof. Current market trends are tracked here and taken into account in the development of new technologies.

In this regard, our traditional enterprise can build on more than 35 years of experience. Our first products – at that time the first temperature sensor for monitoring haystacks – precisely met the requirements of the market and formed the basis of our subsequent success. In the meantime, our product portfolio has been significantly extended: In addition to numerous measuring transducers, as well as indicators and the associated sensors, first and foremost we develop and produce high-quality handheld measuring devices.

Originally developed for the harshest and roughest conditions of our industrial customers, we have, however, also made our devices available to a broad clientele via the

retail trade. Over one hundred thousand devices delivered yearly and thousands of satisfied customers are our motivation to build ever-better measuring devices.

In our manufacturing and quality control we ensure that all machines and equipment are always state of the art. As part of the GHM GROUP, we participate in the continuous improvement measures to further optimize our processes and procedures. Thus, in the future we will also be capable of offering outstanding “Made in Germany” product quality at competitive prices.

Fields of expertise

- o compact, robust, and powerful handheld measurement technology “Made in Germany”
- o wide product range for a wide variety of measured values
- o application-oriented special measuring devices
- o private-label products for customer-specific individualization
- o on customer request, factory calibration in our in-house calibration laboratory

LEGEND

**Made in Germany****ISO Calibration certificate**
available at surcharge**ACCREDIA Calibration certificate**
available at surcharge**Min-/Max-Alarm**

continuous checking of adjustable alarm boundaries (deactivate-able)

3 alarm settings:

off: alarm inactive

on: alarm via display, internal buzzer and interface

no Sound: alarm only via display and interface

Switching function:

External devices can be switched (on / off) or monitored for alarm in combination with switching module GAM3000 (optionally available)

**Auto-Hold**

Automatic freezing of a constant measuring value

**Automatic Power-Off-Function**

- 1 ... 120 min (or deactivated)

- adjustable between 1 ... 120 min or continuous operation

- If Auto-Off-Function is activated, device is automatically switched off after a selected period (0 ... 120 min) if it is meanwhile not used.

**AutoRange**

The conductivity measurement gets automatically switched to the optimal measuring range. Can be deactivated in the menu.

**DAKKS Calibration certificate**

available at surcharge

**HACCP (Hazard Analysis and Critical Control Points)**
suitable for food applications according to HACCP**Background illumination****Hold function**

The current measured value gets "frozen" on keystroke.

**Logger function**

manual: fetch data via buttons or interface

cyclic: fetch data via interface, adjustable cycle time: 1 s ... 1 h

The logger is started or stopped by keypad or interface.

The software GSOFT3050 (see accessories) is available for comfortable read-out of logger data.

**Alarm** Freely adjustable alarm boundaries, pulsating alarm sound (depends on measured value)**Min / max value memory**

Highest and lowest measured values are saved.

**Offset correction (zero point)**

The characteristic can be shifted parallel by an adjustable offset value.

**Offset and slope correction**

A digital offset and slope correction can be adjusted.

**Tare function**

Displayed value as well as min- and max-values are set to zero.

**Real-time clock**

Clock with day, month and year

POSSIBLE CONNECTORS

*Miniature DIN-type plug*
used in:
GMH 3710/50, GMH 3611/51, GMH 3692/95, GMH 3111/51/56*Banana-jack connection*
used in:
GMH 3511/31/51, GMH 5530/50, GPHU 014 MP*BNC-connector*
used in:
GMH 1700, GMH 3830/51, GMH 3511/31/51, GMH 5530/50, GPH 114*7-pol. bajonett connector*
used in:
GMH 5130/50/55, GMH 5430/50, GMH 5630/50/90/95*NST1200-connector*
used in:
GTH 1150/70, GMH 1150/70, GMH 3211/21/31/51, GIM 3590, GMH 3330/50, GMH 3830/51*S7-connector*
used in:
GE 171, GE 108, GE 173, GR 175*4-pol. bajonett connector*
used in:
5000er device series*Jack connector 3,5 mm*
used in:
GMH 175, GMH 285, GFTB 200, GFTH 200*7-pole diode connector*
used in:
GLMU 200/400*M8 plug connector*
used in:
EASYLog, T-Logg*M12 plug connector*
Used in:
GTL (food sensors)*power supply 5,5 x 1,5*
used in:
3000er device series*Angle plug*
Uses include:
Messumformer*Jack connector 2,5*
used in:
discontinued products,
e. g. GDH ... AN Serie, GPRT 1400*Cinch connector*
used in:
discontinued products,
e. g. GPH 014, GPRT 1400

PRODUCT OVERVIEW

GENERAL INFORMATION

Sales International 7

OEM- / customer-specific designs 12-13

Calibration certificates 14-15

MOBILE MEASUREMENT

HANDHELD INSTRUMENTS (WITH SENSORS / ACCESSORIES)

Temperature 16-17

PT 100 / PT100 measuring probe 18-20

PT 1000 / PT1000 measuring probe 20-27

Thermocouples / TypeK measuring probe 28-35

Infrared 36-38

Air humidity / Flow rate 39-43

Material humidity 44-51

Optional accessories 48-49

Water analysis 52-53

Conductivity 54-59

pH / Redox 60-67

pH electrodes 65-66

Dissolved oxygen (in water) 68-73

Gas analysis 74

Air oxygen 75-78

Residual oxygen 79

Carbon monoxide (CO) 80

Indoor air quality 81

Pressure 82-94

Optional accessories 86

Pressure sensors 88-89

Sound level meter / Photo-radiometer / Anemometer / Rotation speed 95-104

Simulators 105-106

Software 107-110

Accessories 111-113



PRODUCT OVERVIEW

STATIONARY MEASUREMENT / INDUSTRY

DISPLAY / CONTROLLER

114

Display instruments for control panel mounting	115-122, 124-126
Controller for control panel mounting	116-123, 126-131
Plug-in display for standard signals	132-133
Special constructions (housings, mounting plate), power supply, accessories	134-135
Multi-Function Unit	136-137

DATA LOGGER / EASYBUS

138-139

Data logger T-Logg	140-141
EASYBus Data logger	142-144
EASYBus sensor modules	145-151
Accessories	151-153
Wireless data logging system	145-154
Accessories	163
Minidatalogger	164

TRANSMITTERS / SENSORS

165

Temperature / Infrared	167-174
Humidity	175-179
Pressure	180-181
Water level, flowmeter, air speed, CO ₂ , O ₂	182-185
Conductivity, Oxygen, pH, Redox	186-190
Sensor level	191
Flow switch / transmitter	192-193
Active Power, current, universal, frequency	194-201
Switch cabinet: temperature, universal	202-204

TEMPERATURE PROBES

205

Thermocouples (Type K, Type N)	206-207, 213
Pt100 / Pt1000	208, 212
Tailored industry probe	209-216
Water proof / self-adhesive probes	217-218
Accessories	219-220

ALARM / PROTECTION, LEVEL

221

Protection and alarm devices (Liquid level, Leakage)	222-229
--	---------

EX-PROTECTION

Measuring instruments (Pressure)	84-85, 89-92
Displays	115, 132
Transmitters	172-173
Temperature probes	208-210



HANDHELD INSTRUMENT

DISPLAY / CONTROLLER

LOGGER / BUS SYSTEMS

TRANSMITTER

TEMPERATURE PROBE

ALARM / PROTECTION, LEVEL

OEM / CUSTOMER VERSIONS



OEM- / Customer versions

We modify our equipment according to your wishes and requirements

Customer-specific developments

If there is no device in our standard product proposal fulfilling your individual requirements, there is the possibility to develop a device according to your specifications.

Please note that the customer versions are associated with a little extra costs or depending on the amount of ordered pieces.



Examples of printed housings

OEM / CUSTOMER VERSIONS

1.

Select housing

You can select a device series that suits their purpose.

Compact series:

low cost, ease of use, classic design

1000 series:

High quality new handheld instrument combines with water tightness and display lighting

3000 series:

Bestseller, best price-performance in practical housing

5000 series:

Best quality and accuracy in the water and impact-resistant casing with display lighting

Device case:

Accessories can be printed too



Device case

Compact series

3000 series

5000 series with
silicone protection cover

1000 series

2.



Choose a color

Choose a color that suits your corporate presentation, logo and can be also match with the later printing.



Overview standard colours:

Housing	black	yellow	red	blue	orange	light grey	basalt grey
1000 series	•	•	•	•		•	
Compact series	•	•	•	•		•	
3000 series	•	•	•	•	•	•	
5000 series			• ¹⁾	• ¹⁾		•	•

¹⁾ Colour of silicone protection cover

3.

Logo placement

Do you wish to have your company logo, name or an image on the device?

Please leave us your data as EPS / TIFF or JPEG, 300 dpi and of sufficient size sent by an email. We work in our printing department a sketch and a proposal over size and positioning. Even high-resolution photo-quality images can be applied through digital printing process.



CALIBRATION CERTIFICATES

DAKKS

CALIBRATION CERTIFICATE DAKKS

DAKKS calibration certificates are issued for very high-quality calibrations and for calibration of reference devices or when stipulated by standards and regulations. DAKKS-DKD calibration certificates are issued with reference devices which must be traceable through a chain to the Laboratories of the German Calibration Service. DAKKS-DKD calibration certificates can only be issued the calibration laboratories

accredited in accordance with the standard DIN EN ISO 17025.

With recurring external certification and re-accreditation, it is ensured that a consistently high quality of calibration is maintained. The cost-intensive and personnel-intensive measures entail higher prices, but ensure the necessary reliability of the measurement results.

We offer the DAKKS calibration certificates listed below for handheld measuring devices marked with the  symbol. DAKKS calibration certificates can also be issued for measuring transducer or combinations of display unit and measuring transducer/sensor.

Temperature

DAKKS-T

(incl. 1 measurement point)
(Please specify an inspection point)

further measurement points

(from -100 ... +1400 °C)
(Please specify an inspection point)

additional measurement point

-196 °C

Pressure

DAKKS-P

Art. no. 602731

Calibration certificate over pressure -1 ... 100 bar
(incl. 9 points increasing and decreasing)

DAKKS-PA

Art. no. 602758

Calibration certificate absolute pressure 0 ... 70 bar
(incl. 9 points increasing and decreasing)

Further measuring ranges upon request

Humidity (incl. 1 temperature value)

DAKKS-FE

Art. no. 602871

Calibration certificate for devices with external sensor
(Testing points: 15 % RH and 70 % RH / at 23 °C)

DAKKS-F

Art. no. 602870

Calibration certificate for devices with fixed attached sensor
(Testing points: 20 % RH, 50 % RH and 80 % RH / at 23 °C)

CALIBRATION CERTIFICATE ACCREDIA

NEW!

At our Delta Ohm location in Padua, Italy, we can issue calibration certificates which are only available from a small number of recognised laboratories in all of Europe. The calibration laboratory is equipped with state-of-the-art measuring technology, is accredited in accordance with the standard DIN EN 17025 and is regularly certified by ACCREDIA. On the basis of the worldwide recognition of calibration services by the umbrella organisation ILAC*, the validity of the calibration certificate is guaranteed by the ILAC in Germany and throughout Europe, as well as about 100 other countries. The calibration certificate is issued in German. We offer the listed ACCREDIA calibration certificates for handheld measuring devices marked with the .

*ILAC (International Laboratory Accreditation Cooperation) has an association for laboratory accreditation for over 40 years which represents its members in over 70 countries and regional organisations. The ILAC MRA recognition arrangement obligates all members to recognise calibration results produced by nationally accredited laboratories (such as DAKKS or ACCREDIA).

Further information:
<http://ilac.org/about-ilac/>

Lighting strength

ACCREDIA-B1

Art. no. 611508

7 measuring points from 50 ... 4000 lux

ACCREDIA-B2

Art. no. 611509

Radiometer UV A
10 ... 50 Wm⁻²

ACCREDIA-B3

Art. no. 611510

Luminance
5 measuring points from 10000 ... 30000 cdm⁻²

ACCREDIA-B4

Art. no. 611511

Pyranometer (solar radiation strength)
1 measuring point

Acoustics

Calibration for integrated sound level meter (IEC 61672) and calibrator (IEC 60942)

ACCREDIA-A1

Art. no. 611514

Devices manufactured by Delta Ohm (see page 95/96)

ACCREDIA-A2

Art. no. 611693

Any manufacturer

Air speed

ACCREDIA-G1

Art. no. 611512

Impeller anemometer up to Ø 60 mm and heat wire sensor
1 ... 25 m/s

Measuring points: approx. 1, 2.5, 5, 10, 25 m/s

ACCREDIA-G2

Art. no. 611513

Impeller anemometer Ø 60 mm or greater, ultrasonic and dynamic pressure sensors, shell anemometer
1 ... 25 m/s

Measuring points: approx. 1, 2.5, 5, 10, 25 m/s




Delta Ohm air speed calibration laboratory, Padua

ISO

ISO calibration certificates (factory calibration certificates) are issued by GHM Greisinger according to the same measures as DAKK5 calibration certificates, but without the expense for external certification, so these certificates can be issued at a reasonable price. In addition, there are measurements for which no accreditation can take place in DAKK5-DKD. In such cases, the ISO calibration is an important alternative. ISO calibration certificates are issued with measurement standards which are subject to regular inspection of measuring and testing equipment, thus ensuring the traceability of the measurement standards used in the process.

The calibration includes, if applicable, adjustment of the measurement device (only with Greisinger devices).

Calibration certificates are available for all handheld instruments marked with the symbol . Also possible for measuring transmitters resp. combinations of display instruments and sensors/transmitters. Calibration certificates are not included in the scope of delivery of measuring devices.



Temperature

ISO WPT

incl. 1 measurement point
(Please specify an inspection point)

additional measurement point

(from -30 ... +500 °C)
(Please specify an inspection point)

additional measurement point

(-100 ... -30 and +500 ... +1300 °C)
(Please specify an inspection point)

additional measurement point

-196 °C

ISO-WPT2A

Art. no. 602583

ISO Certificate of calibration with standard values:
0 °C / +70 °C

ISO-WPT2B

Art. no. 602584

ISO Certificate of calibration with standard values:
0 °C / +37 °C

ISO-WPT3

Art. no. 602596

ISO Certificate of calibration with standard values:
-20 °C / 0 °C / +70 °C

Test reports

ISO-GCO

Art. no. 603841

Test report for carbon monoxide measuring devices.
Measuring points at 0 ppm CO, 300 ppm CO

ISO-GMH38XX

Art. no. 604463

Test report for material moisture.
Measuring devices GMH 38xx, GMR 100

ISO CALIBRATION CERTIFICATE

Pressure

ISO-WPD5

Art. no. 602514

ISO Certificate of calibration: 5 points ascending, 5 points descending

ISO-WPD10

Art. no. 602565

ISO Certificate of calibration: 10 points ascending,
10 points descending

Humidity

ISO-WPF4

Art. no. 602543

ISO Certificate of calibration incl. standard-measuring values
(approx. 20 % / 40 % / 60 % / 80 % RH increasing and decreasing; measurement point Temperature: approx. +23 °C)

ISO-80CL

Art. no. 607734

ISO Certificate of calibration humidity (measuring values
(approx. 20 / 40 / 60 / 80 % bei 23 °C), pressure 5 points
increasing and 5 points decreasing

Atmospheric Oxygen

ISO-WPO3

Art. no. 602816

ISO Certificate of calibration with 3 points:
0 / 20,9 / 100 % O₂

*Note: a replacement of the sensor, before issue the WPO3, is
recommended for sensors with an age of one year!*

Conductivity

ISO-WPL3

Art. no. 602622

ISO Certificate of calibration with 3 points:
~147 µS/cm, ~1413 µS/cm, ~12,90 mS/cm

ISO-WPL10

Art. no. 602623

ISO Certificate of calibration with 10 points from approx.
2 µS, 74 µS, 147 µS, 720 µS, 1413 µS, 2,77 mS, 6,70 mS, 12,90
mS, 24,8 mS, 111,3 mS and approx. 195 mS/cm

Ultrapure Water - Conductivity

ISO-WPL3-RW

Art. no. 602624

ISO Certificate of calibration with 3 points:
~2,50 µS/cm, ~7,00 µS/cm, ~15,00 µS/cm

pH

ISO-WPP3

Art. no. 602767

ISO Certificate of calibration with 3 points:
4,00 pH, 6,87 pH, 9,18 pH

ISO-WPP10

Art. no. 602768

ISO Certificate of calibration with 10 points from
1,09 pH ... 12,75 pH

SERVICE OFFERING

Many devices are delivered with a test report. The reports are created automatically during production and do not provide any information about the traceability of the measurement. Alternatively, the following test reports can be created for measurements which do not require traceability.

Our express service is focussed on urgent ISO calibrations to eliminate long down times for measuring devices. The process is fast and uncomplicated with UPS express delivery throughout Germany. Please contact us at express@greisinger.de.

Express (including shipment)

Temperature measuring devices

-30 ... +500 °C, max. 3 devices, 2 work days

Pressure measuring devices

-1 ... +600 bar, max. 3 devices

Larger numbers of devices or additional measurements possible on request.

Lighting strength

ISO-WPB1

Art. no. 611515

7 measuring points from 50 ... 4000 Lux

ISO-WPB2

Art. no. 611516

Radiometer UV A
10 ... 50 Wm⁻²

ISO-WPB3

Art. no. 611517

Luminance
5 measuring points from 10000 ... 30000 cdm⁻²

ISO-WPB4

Art. no. 611518

Pyranometer (solar radiation strength)
1 measuring point

Air speed

ISO-WPG1

Art. no. 611519

Impeller anemometer up to Ø 60 mm and heat wire sensors
1 ... 25 m/s
Measuring points: approx. 1, 2,5, 5, 10, 25m/s

ISO-WPG2

Art. no. 611520

Impeller anemometer Ø 60 mm or greater, ultrasonic and
dynamic pressure sensors, shell anemometer
1 ... 25 m/s
Measuring points: approx. 1, 2,5, 5, 10, 25m/s

Acoustics

Calibration for integrated sound level meter (IEC 61672)
and calibrator (IEC 60942)

ISO-WPA1

Art. no. 611521

Devices manufactured by Delta Ohm (see page 95/96)

Octave band filter - third-octave band filter calibration
(according to IEC 60942) and microphone calibration
(sensitivity, frequency) on request

Due to the wide variety of calibration possibilities, it is not possible to list all possible variations in this catalogue. Please ask us or request a quotation.



For the storage of the devices, we recommend the use of a safe-keeping case.

NEW!

Rental service

On request, we can also provide various rental devices
(ISO calibration certificate included).
For information, contact calibration@greisinger.de.

Subject to change without notice.

TEMPERATURE



GMH 3710

GMH 3750

GMH 2710-T / -E

GMH 2710-K / -G

GMH 2710-F / -I

GTH 175 PT-T / -E

GTH 175 PT-K / -G

G 1700

G 1710/20/30

HD 2178.2

GTH 200 air

APPLICATION:

Reference- /
precision measurement

•

•

•

•

•

•

•

•

•

•

Quality management

•

•

•

•

•

•

•

•

•

•

Difference measurement

Surface measurement

•

Core temperature measurement

•

•

•

•

•

•

•

•

•

High-temperature measurement

•

•

•

Food, HACCP

•

•

•

•

•

•

•

•

•

•

Water-proof

•

•

•

•

•

EQUIPMENT:

Sensor element

Pt100

Pt100

Pt1000

Pt1000

Pt1000

Pt1000

Pt1000

Pt1000

Pt1000

1 x Pt100/1000
1 x Thermo

Pt1000

Max. measuring range [°C]

-200 ... +850

-200 ... +850

-200 ... +200

-200 ... +250

-70 ... +250

-199 ... +199

-199 ... +199

-200 ... +450

-70 ... +250

-200 ... +650 (Pt)
-200 ... +1300 (TE)

-25 ... +70

Min. Resolution [°C]

0,01

0,01

0,1

0,1

0,1

0,1

0,1

0,1

0,1

0,1

0,1

Plug-in probe

•

•

•

•

Measurement inputs

1

1

1

1

1

1

1

1

1

2

1

Min/Max, Hold, Auto-Off

•

•

•

•

•

•

•

•

•

Alarm (buzzer) / Data logger

•

• / -

• / -

- / •

DEVICE INFORMATION:

Catalogue page

Page 18

Page 18

Page 27

Page 27

Page 27

Page 26

Page 26

Page 21

Page 24

Page 31

Page 20

INFORMATION

Background knowledge in temperature measurement

Resistance: Pt100, Pt1000

The sensor element's ohmic resistance changes with temperature. This can be evaluated by the displaying device and afterwards converted to the corresponding temperature. Especially for Pt100 one distinguishes between 2-, 3- and 4-wire connection. The 3- and 4-wire connection allows for automatic compensation of measuring error caused by the serial cable resistance.

Features:

- Highest accuracies possible
- High reproducibility of results with exchanged sensors, especially for Pt100 and Pt1000
- Standard measuring method for reference measurements

CONCLUSION:

a little slower, but highly precise

Thermocouple: type K, type N, type S,...

The contact of two different metal compositions (e.g. NiCr and NiAl) results in a voltage between contact spot (probe) and the displaying device. This voltage is almost proportional to the temperature difference and gets evaluated and converted to a temperature by the displaying device.

Features:

- Very small sensors are possible, therefore:
 - Very short response times possible
 - Highly suitable for surface measurements
- Temperatures up to 1750 °C can be measured (depending on design of probe and type of used thermocouple)

CONCLUSION:

very fast, very flexible and wide measuring range



GMH 3211	GMH 3221	GMH 3231	GMH 3251	HD 32-8-16	GTH 1150	GMH 1150	GTH 1170	GMH 1170
•	•	•	•	•			•	•
		•	•	•				
•	•	•	•	•	•	•	•	•
•	•	•	•		•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•					

EQUIPMENT:

J, K, N, S, T, E, B	K	J, K, N, S, T, E, B	J, K, N, S, T, E, B	K, J, T, N, R, S, B, E	K	K	K	K
-220 ... +1750	-220 ... +1372	-220 ... +1750	-220 ... +1750	-200 ... +1800	-50 ... +1150	-50 ... +1150	-65 ... +1150	-65 ... +1150
0,1	0,1	0,1	0,1	0,05	1	1	1	1
•	•	•	•	•	•	•	•	•
1	2	2	2	16	1	1	1	1
•	•	•	•	•			•	•
			•					

DEVICE INFORMATION:

Page 28	Page 28	Page 28	Page 28	Page 29	Page 30	Page 30	Page 30	Page 30
---------	---------	---------	---------	---------	---------	---------	---------	---------

PT100 - HIGH-PRECISION THERMOMETER



HIGHLIGHTS:

- Reference meter for any calibration requirement
- Highest accuracy
- Resolution (0.01 °C)
- Incl. calibration protocol

ADDITIONAL FUNCTIONS AT GMH 3750:



GMH 3710

Art. no. 600332
Pt100 - High-Precision Thermometer, Accessories not incl., 4-wire

GMH 3750

Art. no. 600335
Pt100 - High-Precision Thermometer, Accessories not incl., 4-wire, Data logger

Application:	
Reference measuring device in liquids, soft media, air/gases.	
Specifications:	
Measuring range:	-199.99 ... +199.99 °C or -200.0 ... + 850.0 °C -199.99 ... +199.99 °F or -328.0 ... +1562.0 °F
Resolution:	0.01 °C or 0.1 °C 0.01 °F or 0.1 °F
Linearisation:	Curve according to DIN EN 60751. GMH 3750 add. supports an userdefined curve.
Accuracy: (±1 digit) (at nominal temperature = 25 °C)	≤0.03 °C / 0.06 °F at resolution 0.01° ≤0.1 °C / 0.2 °F at resolution 0.1°
Temperature drift:	≤0.002 °C / K
Probe connection:	via 4-pin miniature DIN-plug, Pt100, 4-wire, in acc. to DIN EN 60751
Nominal temperature:	25 °C
Working temperature:	-25 ... +50 °C
Relative humidity:	0 ... +95 % RH (non-condensing)
Storage temperature:	-25 ... +70 °C
Display:	two 4½ digit LCDs (12.4 mm or 7 mm high), as well as additional arrows.
Pushbuttons:	6 membrane keys
Output:	3-pin jack connector Ø 3.5 mm, choice between serial interface or analog output
Serial interface:	direct connection to RS232 or USB interface of a PC via electrically isolated interface adapter GRS 3100 or GRS 3105 resp. USB 3100 N (p.r.t. accessories).
Analog output:	freely adjustable (resolution 13 bit, accuracy 0.05 % at nominal temperature)
Power supply:	9 V-battery, as well as additional d.c. connector for external 10.5 ... 12 V voltage supply.
Power consumption:	approx. 1 mA, approx. 300 h
Housing:	Impact-resistant ABS plastic housing, membrane keyboard, transparent panel, integrated pop-up clip
Dimensions:	142 x 71 x 26 mm (H x W x D)
Weight:	approx. 155 g
Scope of supply:	Device, battery, calibration protocol, Manual

additional at GMH 3750:	
Userdefined sensor curve:	50 interpolation points (GMH 3750 only)
Logger function (GMH 3750 only):	manual: 99 data sets (fetch data via buttons or interface) cyclic: 16.384 data sets (fetch data via interface) adjustable cycle time: 1 s ... 1 h The logger is started or stopped by keypad or interface. The software GSOF3050 (see accessories) is available for comfortable read-out of logger data.
Accessories and spare parts:	
USB 3100 N	Art. no. 601092 Interface converter
GSOF 3050	Art. no. 601336 Operating software (p.r.t. page 109)
GNG 10 / 3000	Art. no. 600273 Power supply
ST-R1	Art. no. 601066 Device protection bag (p.r.t. page 112)
GKK 1100	Art. no. 601060 Case (340 x 275 x 83 mm) with foam lining for universal use
GMHKonfig	(visit our homepage: Download --> Software)
Software description:	Comfortable software to edit the user defined sensor curve of the GMH 3750. (e.g. for calibration laboratories etc.)
Note:	Please note that for the interface communication with the device a interface converter (USB 3100 N) is necessary (p.r.t. page 113).

SUITABLE PT100 MEASURING PROBE (4-WIRE)

Accuracy Pt100:

Sensor accuracy acc. to DIN EN 60751

DIN cl. B: (area of validity: -50 ... +500 °C) $\pm 0.3^\circ\text{C}$ at 0 °C**DIN cl. A:** (area of validity: -30 ... +300 °C) $\pm 0.15^\circ\text{C}$ at 0 °C**DIN cl. AA = 1/3 DIN cl. B:** (area of validity: 0 ... +150 °C) $\pm 0.1^\circ\text{C}$ at 0 °C**1/10 DIN cl. B:** (area of validity: -50 ... +100 °C) $\pm 0.03^\circ\text{C}$ at 0 °C

Upcharges special designs:

longer probe tube

upcharge per further starting 100 mm

longer cable (silicone)

upcharge per further starting meter

other cable material

upcharge per meter (wiring price p.r.t. page 163)

teflon covered probe tube

(for probes up to 200 mm)

(for probes used in acids and salt water, upper temperature range 250 °C)

waterproof probe handle

(only possible with PVC cable -20 ... +105 °C)

higher sensor accuracy:

DIN cl. AA, for Pt100, tolerances: 0.1 °C at 0 °C

higher sensor accuracy:

1/10 DIN cl. B, for Pt100-probes, tolerances: 0.03 °C at 0 °C


basic fee for custom made probe

GTF 401
 Art. no. 600377

Immersion probe for liquids / gases
 -50 ... +400 °C, DIN cl. B

GTF 401 DIN Kl. AA
 Art. no. 600378

Immersion probe for liquids / gases
 -50 ... +400 °C, DIN cl. AA ($\pm 0.1^\circ\text{C}$ at 0 °C)




non-corrosive stainless steel tube (V4A) Ø 3 mm, plastic handle, anti-buckling glanding, approx. 1 m 4-wire PVC cable, 4-pin miniature DIN-type plug

Response time T_{90} water 0.4 m/s approx. 10 s, air 2 m/s approx. 40 s

GTF 35
 Art. no. 600391

Immersion probe for liquids / gases
 -50 ... +400 °C, DIN cl. B



non-corrosive stainless steel tube (V4A) Ø 3 mm, shrink sleeving, approx. 1 m 4-wire PVC cable, 4-pin miniature DIN-type plug


Response time T_{90} water 0.4 m/s approx. 10 s, air 2 m/s approx. 40 s

GES 401
 Art. no. 600384

Insertion probe for soft media
 -50 ... +400 °C, DIN cl. B

GES 401 DIN Kl. AA
 Art. no. 600385

Insertion probe for soft media
 -50 ... +400 °C, DIN cl. AA ($\pm 0.1^\circ\text{C}$ at 0 °C)

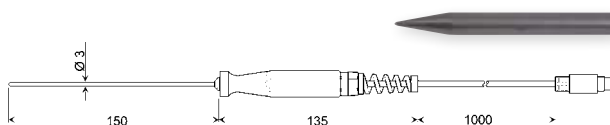

stainless steel tube (V4A) Ø 3 mm with needle type prod, plastic handle, anti-buckling glanding, approx. 1 m 4-wire PVC cable, 4-pin miniature DIN-type plug


Response time T_{90} water 0.4 m/s approx. 10 s, air 2 m/s approx. 40 s

Advantages of sheath element Pt100:

- high temperature resistance
- sheath cable is bendable
- high shock resistance
- high service life

GTF 401 / 1.6
 Art. no. 602066

Immersion probe with sheath element Pt100
 -50 ... +400 °C, DIN cl. B




V4A sheath tube bendable, Ø 1.6 mm, plastic handle, antikink connection, approx. 1 m 4-pole cable, mini-DIN plug

Response time T_{90} water 0.4 m/s < 2 s, air 2 m/s approx. 25 s

GTF 401 1/10 DIN
 Art. no. 600379

Immersion probe with sheath element Pt100
 -50 ... +400 °C, 1/10 DIN class B ($\pm 0.03^\circ\text{C}$ at 0 °C)



stainless steel tube (V4A) Ø 3 mm, plastic handle, anti-buckling glanding, approx. 1 m 4-wire PVC cable, 4-pin miniature DIN-type plug


Response time T_{90} water 0.4 m/s < 5 s, air 2 m/s approx. 60 s

GTF 601
 Art. no. 600387

Immersion probe with sheath element Pt100
 -200 ... +600 °C, DIN cl. B

GTF 601 DIN Kl. AA
 Art. no. 600388

Immersion probe with sheath element Pt100
 -200 ... +600 °C, DIN cl. AA ($\pm 0.1^\circ\text{C}$ at 0 °C)




V4A-flexible jacket tube, Ø 3 mm, plastic handle, anti-buckling glanding, approx. 1 m 4-wire PVC cable, 4-pin miniature DIN-type plug

Response time T_{90} water 0.4 m/s < 5 s, air 2 m/s approx. 60 s

GLF 401 Mini
 Art. no. 600395

Ambient air probe
 -25 ... +70 °C, DIN cl. A




V4A tube Ø 1.6 mm, FL = approx. 40 mm, 4-pin mini DIN-type plug

Response time T_{90} air 2 m/s approx. 25 s

GOF 401 Mini
 Art. no. 600396

Surface probe for solid surfaces
 -50 ... +200 °C, DIN cl. B

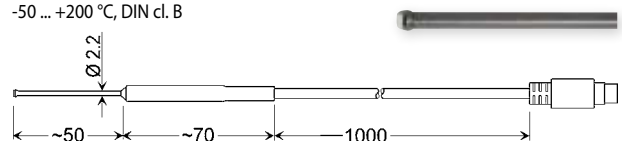

Frontal Pt100 ceramic plate 2 x 2.3 mm, V4A tube Ø 2.2 mm, approx. 1 m 4-wire PVC cable, 4-pin miniature DIN-type plug

Response time T_{90} approx. 15 s

CALIBRATED SYSTEMS PT 100



General:

The overall error of a measuring consists of the sum of the instrument error and the probe error. To minimize the overall error, we offer calibrated and optimized systems below. Due to their excellent system accuracy they are especially suitable for quality assurance according to ISO9000ff, as reference instruments in manufacturing processes, laboratory, service and maintenance, etc. The system optimization is done via a special characteristic curve which is determined for each temperature probe separately and stored in the instrument (GMH 3750) or with probe adjusting via offset and slope input (GMH 3710). Because of the low measuring current there is no self heating effect of the sensor and the measurement is thermoelectrically compensated.

GMH 3750/SET1

Art. no. 602690
Measuring set incl. ISO certificate of calibration

Specifications:	
Optimized measuring range:	-20 ... +70 °C
Temperature probe:	GTF 401 DIN cl. AA, Pt100, 4-wire
System accuracy:	better than 0.07 °C (at opt. range)
Calibration points:	-20 °C / 0 °C / +70 °C

GMH 3750/SET2

Art. no. 602691
Measuring set incl. ISO certificate of calibration

Specifications:	
Optimized measuring range:	0 ... +250 °C
Temperature probe:	GTF 401 DIN cl. AA, Pt100, 4-wire
System accuracy:	better than 0.3 °C (at opt. range)
Calibration points:	0 °C / 100 °C / 250 °C

GMH 3710/SET1

Art. no. 602687
Measuring set incl. ISO certificate of calibration

Specifications:	
Optimized measuring range:	-20 ... +70 °C
Temperature probe:	GTF 401 DIN cl. AA, Pt100, 4-wire
System accuracy:	better than 0.1 °C (at opt. range)
Calibration points:	-20 °C / 0 °C / +70 °C

GMH 3710/DKD1

Art. no. 602689
Measuring set incl. DAKS calibration certificate DIN 17025

Specifications:	
Optimized measuring range:	-20 ... +70 °C
Temperature probe:	GTF 401 DIN cl. AA, Pt100, 4-wire
System accuracy:	better than 0.1 °C (at opt. range)
Calibration points:	-20 °C / 0 °C / +70 °C

Scope of supply:

Measuring device GMH 3750 or GMH 3710, temperature probe GTF 401 DIN Kl. AA, plastic case GKK 3500 and ISO certificate of calibration with 3 calibration points.

ROOM THERMOMETER



SCHNELLE MESSUNG
DER RAUMTEMPERATUR

COMFORTABLE HANDLING
WITH ONLY ONE HAND

GTH 200 air

Art. no. 600251
Precision room thermometer

General:	
The exposed but yet protected temperature sensor provides fast and precise measurements of ±0.2 °C (at 20 °C). The device has undergone a streamlining process and is optimized to its key features, ensuring a comfortable and efficient handling with only one hand.	

Application:	
The room thermometer GTH 200 air is an essential tool for fast and precise temperature measurements in	
• calibration rooms	
• production / computer rooms	
• living space	
• laboratories, etc.	

Specifications:	
Measuring range:	-25.0 ... +70.0 °C
Resolution:	0.1 °C
Accuracy:	(±1 digit) (at nominal temperature) ±0.5 % of meas. value ±0.1 °C
Sensor:	Pt 1000, DIN class AA
Response time T ₉₀ :	approx. 5 s
Display:	4½ digit, 11 mm high LCD-display
Nominal temperature:	25 °C
Working temperature:	-20 ... +70 °C
Relative humidity:	0 ... 95 % RH (non condensing)
Storage temperature:	-25 ... +70 °C
Power supply:	9 V battery
Power consumption:	max. 0.1 mA
Battery life:	approx. 6000 operating hours with alkaline battery
Housing:	impact-resistant ABS housing
Dimensions:	approx. 106 x 67 x 30 mm (H x W x D), additionally the sensor head at the front side, 35 mm long, Ø 14 mm, resulting total length 141 mm
Weight:	approx. 135 g incl. battery
Scope of supply:	device, battery, manual

PRECISE PT 1000 UNIVERSAL THERMOMETER



DURABLE AND AFFORDABLE

HIGHLIGHTS:

- Modern and functional housing
- 3-line display / overhead display at the push of a button
- Backlighting
- Alarm function
- Waterproof (IP65 / IP67)
- Durable, long battery life

G 1710, G 1720, G 1730 WITH PERMANENTLY CONNECTED SENSOR SEE PAGE 24



Connection

G 1700

Art. no. 609826

Precise universal thermometer, with BNC connection, without sensor

General:

The primary focus in the development of the new GMH 1000 series was place on the essential functions of the measurement technology. Pure measurement with a focus on precision, speed and reliability packaged in a compact housing distinguish an impressive price/performance ratio, Made in Germany.

The new handheld measuring devices also impress with their ergonomic design, dust and water-protected design in accordance with IP 65/67 and the illuminated display. The compact thermometer is available with a practical BNC connection for interchangeable sensors. The device redefines our entry-level measurement class - calibration log included.

Application:

The highest-precision measurements in liquids and in air, for measurement of core temperatures (with insertion sensor); laboratories, quality assurance, service, food, etc.

Specifications:

Measuring range:	-200.0 ... +450.0 °C (-328.0 ... +842.0 °F) with plug-in sensor (Observe the permissible range of application of the sensor that is used!)
Accuracy (device): (at nominal temperature = 25 °C)	-20 ... +100 °C: $\pm 0.1 \text{ K} \pm 1 \text{ digit}$ otherwise 0.1 % of m. v. $\pm 2 \text{ digits}$
Operating conditions:	-20 ... +50 °C; 0 ... 95 % RH (non condensing)
Display:	3-line unit, with background light, protected by an unbreakable pane, overhead display at the push of a button
Power supply:	2 x AA battery, >5000 h operating time
Sensor:	Pt1000 2-wire can be used with BNC connection
Protection rating:	IP65 / IP67 (only with sensors identified as waterproof in the connected state)
Housing:	break-proof ABS housing
Dimensions:	108 x 54 x 28 mm (H x W x D) without sensor connection
Weight:	130 g (without sensor)
Scope of supply:	Device, calibration protocol, 2 x battery, manual

Accessories and spare parts:

GF 1T-T3-B-BNC

Art. no. 609549

Pt1000 handheld sensor, Pt1000 Class B, with BNC connector, Ø 3 mm, p.r.t. page 22

GF 1T-E3-B-BNC

Art. no. 609639

Pt1000 insertion sensor, Pt1000 Class B, with BNC connector, Ø 3 mm, p.r.t. page 22

GF 1T-E1.5-B-BNC

Art. no. 609645

Extra-thin Pt1000 insertion sensor, Pt1000 Class B, with BNC connector, Ø 1.5 mm, p.r.t. page 22

ST-G1000

Art. no. 611373

Device protection bag with 1 round cut-out

GB AA

Art.-Nr: 610049

Spare battery AA (2 batteries required)

Further sensors see page 21-23

SUITABLE PT1000 - MEASURING PROBES, 2-WIRE

Accuracy Pt1000:

sensor accuracy acc. to DIN EN 60751

DIN cl. B: (area of validity: -50 ... +500 °C)

 $\pm 0.3 \text{ °C at } 0 \text{ °C}$

DIN cl. A: (area of validity: -30 ... +300 °C)

 $\pm 0.15 \text{ °C at } 0 \text{ °C}$

DIN cl. AA = 1/3 DIN cl. B: (area of validity: 0 ... +150 °C)

 $\pm 0.1 \text{ °C at } 0 \text{ °C}$

Upcharges special designs:

longer probe tube

upcharge per further starting 100 mm

longer cable (silicone)

upcharge per further starting meter

other cable material

upcharge per meter p.r.t. page 220

teflon covered probe tube

(for probes up to 200 mm)

(for probes used in acids and salt water, upper temperature range 250 °C)

casted waterproof probe handle

(only possible with PVC cable -20 ... +105 °C)

higher sensor accuracy:

DIN cl. AA, for Pt1000, tolerances: 0.1 °C at 0 °C

higher sensor accuracy:

1/10 DIN cl. B, for Pt1000-probes, tolerances: 0.03 °C at 0 °C

basic fee for custom made probe

All types of probes also available for Pt100 2- / 3- or 4-wire connection
We manufacture all types of probes according to your special desires - low priced and fast. Please contact us.




GTF 175-BNC

Art. no. 607165

Immersion for liquids / gases

-70 ... +250 °C, Pt1000 cl. B



non-corrosive V4A tube, Ø 3 mm, plastic handle, anti-buckling glanding, 1 m highly flexible silicone cable, BNC connector

Response time T_{90} : water 0.4 m/s <2 s, air 2 m/s approx. 40 s

Advantages of sheath element Pt1000:

- high temperature resistance
- sheath cable is bendable
- high shock resistance
- high service life




GTF 175 / 1.6-BNC

Art. no. 611323

Immersion probe with sheath element Pt1000

-70 ... +250 °C, Pt1000 cl. B



stainless steel tube (V4A), flexible, Ø 1.6 mm, plastic handle, anti-buckling glanding, 1 m highly flexible silicone cable, BNC connector

Response time T_{90} : water 0.4 m/s <2 s, air 2 m/s approx. 25 s




GES 20-BNC

Art. no. 607377

Insertion probe for soft media

-70 ... +250 °C, Pt1000 cl. B




V4A tube with Ø 1.5 mm slim insertion tip, small teflon handle, stainless steel kink protection, 1 m Teflon cable, BNC connector

Response time T_{90} : water 0.4 m/s <1 s, air 2 m/s approx. 12 s

SUITABLE PT1000 - MEASURING PROBES, 2-WIRE

-70 °C
+250 °C**GES 175-BNC**


Art. no. 611324

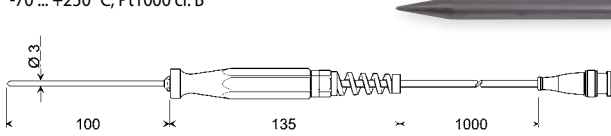Insertion probe for soft media
-70 ... +250 °C, Pt1000 cl. B

V4A tube Ø 3 mm with slim insertion tip, plastic handle, anti-buckling glanding, 1 m highly flexible silicone cable, BNC connector

Response time T_{90} : water 0.4 m/s < 2 s, air 2 m/s approx. 40 s-70 °C
+250 °C**GLF 175-BNC**


Art. no. 607162

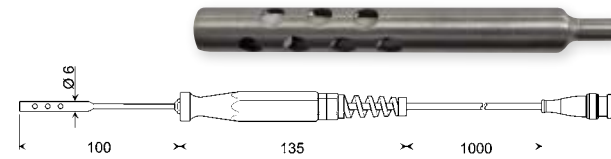Air/gas probe for clean media
-70 ... +250 °C, Pt1000 cl. B

(for dirty measurands use GTF 175), punched V4A protection tube, fast miniaturized Pt1000 mounted freely in tube, resulting in fast response, plastic handle, anti-buckling glanding, 1 m highly flexible silicone cable, BNC connector

Response time T_{90} : air 2 m/s approx. 15 s-70 °C
+250 °C**GOF 175-BNC**


Art. no. 607163

Surface probe for solid surfaces
-70 ... +250 °C, Pt1000 cl. B

2 x 2.3 mm ceramic Pt1000 sensor mounted at the tip, V4A tube, quadratic 3 x 3 mm at the tip, plastic handle, anti-buckling glanding, 1 m highly flexible silicone cable, BNC connector

Response time T_{90} : approx. 15 s-70 °C
+120 °C**GOF 175 Mini-BNC**


Art. no. 610399

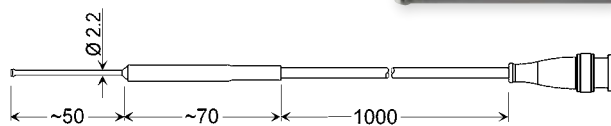Surface probe for solid surfaces
-70 ... +120 °C, Pt1000 cl. B

2 x 2.3 mm ceramic Pt1000 sensor mounted at the tip, V4A tube Ø 2.2 mm, 1 m highly flexible silicone cable, BNC connector

Response time T_{90} : approx. 15 s-70 °C
+250 °C**GGF 175-BNC**


Art. no. 610397

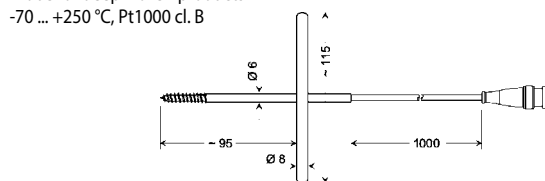Probe for deep-frozen products
-70 ... +250 °C, Pt1000 cl. B

to screw into deep-frozen products, etc. no predrilling required. V4A tube, 6 mm Ø with screw prod, 1 m highly flexible silicone cable, BNC connector

Response time T_{90} : approx. 15 s-50 °C
+200 °C**GTF 2000-BNC**

Art. no. 607164

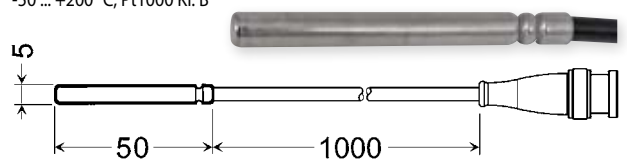Air- / tube mounting probe
-50 ... +200 °C, Pt1000 Kl. B

V4A-sensor sleeve Ø 5 mm, 1 m highly flexible silicone cable, BNC connector, each beginning meter upcharge

Response time T_{90} : water 0.4 m/s < 10 s, air 2 m/s approx. 60 s**Variant:****GTF 2000-WD**

Art. no. 602362

water proof type, construction like described before, but cable of PVC and tube enclosed water proof. Max. 105 °C!

**HIGHLIGHTS:**


- Lightweight, manageable handle with optimised ergonomics and flexible cable
- Waterproof: can be completely immersed
- Temporary temperature resistance of up to 250 °C

-70 °C
+250 °C**GF 1T-T3-B-BNC**

Art. no. 609549

Pt1000 handheld sensor,
-70 ... +250 °C, Pt1000 cl. B**GF 1T-T3-AA-BNC**

Art. no. 609550

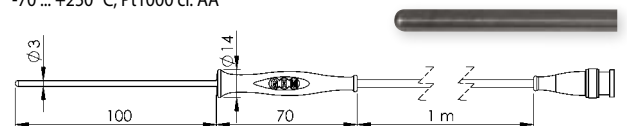Precision Pt1000 handheld sensor,
-70 ... +250 °C, Pt1000 cl. AA

Immersion probe Ø 3 mm made of V4A tube, black silicone handle from -50 ... +250 °C, 1 m Silicone cable from -50 ... +230 °C continuously / +250 °C for 2 h, sensor probe and silicone handle IP67, BNC connector

Response time T_{90} : water 0.4 m/s < 2 s, air 2 m/s approx. 40 s**Variants:****GF 1T-T3-B-LE**

Art. no. 609547

Pt1000 handheld sensor, Pt1000 cl. B, with loose ends

GF 1T-T3-AA-LE

Art. no. 609548


Precision Pt1000 handheld sensor, Pt1000 cl. AA, with loose ends

SUITABLE PT1000 - MEASURING PROBES, 2-WIRE

-200 °C
+250 °C**GF 1T-T3-B-BNC-MB4**

Art. no. 611763

Pt1000 handheld probe for low temperatures, -200 ... +250 °C, Pt1000 cl. B

NEW!

immersion probe Ø 3 mm made of V4A tube, black silicone handle -50 ... +250 °C, 1 m silicone cable, -50 ... +230 °C permanently / +250 °C for 2 h, probe tip and silicone handle IP67, BNC plug

Response time T_{90} : water 0.4 m/s < 2 s, air 2 m/s approx. 40 s

-70 °C
+250 °C**GF 1T-E3-B-BNC**


Art. no. 609639

Pt1000 insertion sensor, -70 ... +250 °C, Pt1000 cl. B

GF 1T-E3-AA-BNC

Art. no. 609640

Precision Pt1000 insertion sensor, -70 ... +250 °C, Pt1000 cl. AA



Insertion probe Ø 3 mm made of V4A tube, black silicone handle from -50 ... +250 °C, 1 m silicone cable from -50 ... +230 °C continuously / +250 °C for 2 h, sensor probe and silicone handle IP67, BNC connector,

Response time T_{90} : water 0.4 m/s < 2 s, air 2 m/s approx. 40 s

Variants:**GF 1T-E3-B-LE**

Art. no. 609637

Pt1000 insertion sensor, Pt1000 cl. B, with loose ends

GF 1T-E3-AA-LE

Art. no. 609638

Precision Pt1000 insertion sensor, Pt1000 Cl. AA, with loose ends

-70 °C
+250 °C**GF 1T-E1.5-B-BNC**


Art. no. 609645

Extra-thin Pt1000 insertion sensor, -70 ... +250 °C, Pt1000 cl. B

GF 1T-E1.5-A-BNC

Art. no. 609646

Extra-thin Pt1000 insertion sensor, -70 ... +250 °C, Pt1000 cl. A



Insertion probe Ø 1.5 mm made of V4A tube, black silicone handle from -50 ... +250 °C, 1 m silicone cable from -50 ... +230 °C continuously / +250 °C for 2 h, sensor probe and silicone handle IP67, BNC connector

Response time T_{90} : water 0.4 m/s < 1 s, air 2 m/s approx. 12 s

Variants:**GF 1T-E1.5-B-LE**

Art. no. 609643

Extra-thin Pt1000 insertion sensor, Pt1000 Cl. B, with loose ends

GF 1T-E1.5-A-LE


Art. no. 609644

Extra-thin Pt1000 insertion sensor, Pt1000 Cl. A, with loose ends

-70 °C
+250 °C**GF 2T-E3-B-BNC**

Art. no. 609926

Pt1000 insertion sensor, BNC connector, without cable -70 ... +250 °C, Pt1000 cl. B

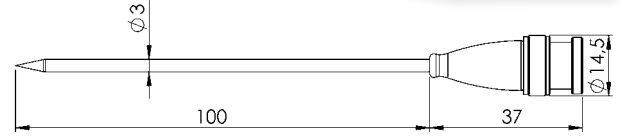


Insertion probe Ø 3 mm made of V4A tube, IP67 in connected state, BNC connector with EPDM grommet up to +75 °C

Response time T_{90} : water 0.4 m/s < 2 s, air 2 m/s approx. 40 s

-70 °C
+250 °C**GF 2T-E1.5-A-BNC**

Art. no. 609824

Pt1000 insertion sensor, BNC connector, without cable -70 ... +250 °C, Pt1000 cl. A

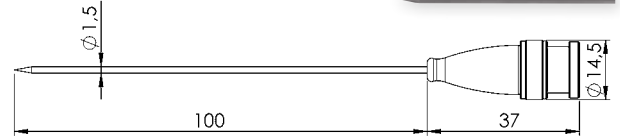


Insertion probe Ø 1.5 mm made of V4A tube, IP67 in connected state, BNC connector with EPDM grommet up to +75 °C

Response time T_{90} : water 0.4 m/s < 1 s, air 2 m/s approx. 12 s

-70 °C
+250 °C**GF 1T-L3-B-BNC**

Art. no. 611297

Pt1000 air sensor for clean media -70 ... +250 °C, Pt1000 cl. B

NEW!

(use GF 1T-T3 for contaminated media), perforated V4A tube Ø 3 mm, quick-reaction Pt1000 freely arranged, black silicone handle, up to +250 °C, 1 m silicone cable, up to +230 °C permanently / +250 °C for 2 h, BNC plug

Response time T_{90} : air 2 m/s approx. 15 s

Variant:**GF 1T-L3-B-LE**


Art. no. 611298

Pt1000 air sensor, Pt1000 Class B, with loose ends

-70 °C
+400 °C**GF 3T-E3-BNC**

Art. no. 611301

Pt1000 grill sensor -70 ... +400 °C, Pt1000 cl. B

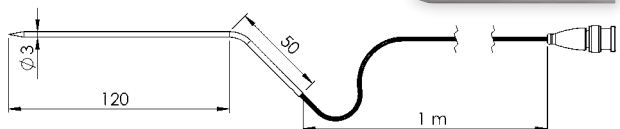NEW!

insertion probe Ø 3 mm made of bent V4A tube, 1 m glass fibre insulated cable with stainless steel branding up to +350 °C continuously / +400 °C for 2 h, BNC plug

Response time T_{90} : water 0.4 m/s approx. 10 s, air 2 m/s approx. 40 s

Variant:**GF 3T-E3-B-LE**

Art. no. 611302

Pt1000 grill sensor, Pt1000 Class B, with loose ends



PRECISE UNIVERSAL THERMOMETER



- HIGHLIGHTS:
- Modern and functional housing
 - 3-line display / overhead display at the push of a button
 - Backlighting
 - Alarm function
 - Waterproof (IP65 / IP67)
 - Durable, long battery life
 - High-quality sensors: complete with Pt1000 handheld sensor (up to 250 °C incl. handle and cable!)

G 1700 WITH BNC CONNECTION FOR CHANGEABLE PROBES SEE PAGE 21

DURABLE AND AFFORDABLE

- G 1710**
Art. no. 609828
Precise universal thermometer with permanently connected immersion sensor, Ø 3 mm
- G 1720**
Art. no. 609829
Precise universal thermometer with permanently connected insertion sensor, Ø 3 mm
- G 1730**
Art. no. 609832
Precise universal thermometer with permanently connected insertion sensor, Ø 1.5 mm

General:

The primary focus in the development of the new GMH 1000 series was place on the essential functions of the measurement technology. Pure measurement with a focus on precision, speed and reliability packaged in a compact housing distinguish an impressive price/performance ratio, Made in Germany.

The new handheld measuring devices also impress with their ergonomic design, dust and water-protected design in accordance with IP 65/67 and the illuminated display. The compact thermometer is available as a complete device including sensor with maximum overall precision. The device redefines our entry-level measurement class - calibration log included. The matching sensors can be used at temperatures of up to 250 °C (incl. handle and cable) and are distinguished by their compact design and small tube diameter. Integrated: High-quality Pt1000 sensors.

Application:

The highest-precision measurements in liquids and in air, for measurement of core temperatures (with insertion sensor); sensor handle and cable temperature range of up to 250 °C (permanent use temperature of 230 °C); laboratories, quality assurance, service, food, etc.

Specifications:	
Measuring range:	-70.0 ... +250.0 °C (-94.0 ... +482.0 °F)
Accuracy: (at nominal temperature = 25 °C)	-20 ... +100 °C: ±0.1 K ±1 digit -70 ... +250 °C: ±0.2 % of m. v. ±2 digit
Operating conditions:	-20 ... +50 °C; 0 ... 95 % RH (non condensing)
Display:	3-line unit, with background light, protected by an unbreakable pane, overhead display at the push of a button
Power supply:	2 x AA battery, >5000 h operating time
Sensor	
G 1710:	Immersion sensor Ø 3 mm, Pt1000 permanent 2-wire connection, V4A, 1 m cable
G 1720:	Durable insertion sensor Ø 3 mm, Pt1000 permanent 2-wire connection, V4A, 1 m cable
G 1730:	Extra-thin insertion sensor Ø 1.5 mm, Pt1000 permanent 2-wire connection, V4A, 1 m cable
Response time T ₉₀ :	Ø 3 mm: water 0.4 m/s <2 s; Ø 1.5 mm: water 0.4 m/s <1 s
Protection rating:	IP65 / IP67
Housing:	Break-proof ABS housing
Dimensions:	108 x 54 x 28 mm (H x W x D) without sensor connection
Weight:	130 g (without sensor)
Scope of supply:	Device with integrated sensor, calibration log, 2 x battery, manual

Accessories and spare parts:

ST-G1000
Art. no. 611373
Device protection bag with 1 round cut-out

GB AA
Art.-Nr: 610049
Spare battery AA (2 batteries required)

HAY THERMOMETER



HIGHLIGHTS:

- Fiberglass probe 4 meter long
- Backlight
- Alarm function

HayTemp 1700

Art. no. 611377
Hay thermometer

General:

Stored hay or straw, etc. is prone to overheating (depreciation) or even self-ignition, because of biological processes. This problem is even emphasized with higher moisture contents. Therefore a regular temperature check is crucial. The HayTemp 1700 optimally supports farmers as well as firefighters.

Application:

Hay or straw measurements at depth up to 4 m.

Specifications:

Device:	G 1700
Probe connection:	BNC, Pt1000, 2-wire
Measuring rod:	Fiberglass probe, approx. 4 m long, approx. 10 mm Ø, 1 measuring point at probe tip
Cutting tip:	screwable, double-edged tip with integrated temperature sensor
Weight:	Measuring rod with cutting tip approx. 600 g
Scope of supply:	Device, fiberglass rod, probe tip Pt1000, BNC cable (1.5 m), battery, manual

Accessories and spare parts:

G 1700

Art. no. 609826
Precise universal thermometer, with BNC connection, without sensor

Fiberglasrohr

Art. no. 604407
4 m, without probe and without tip

Sondenspitze

Art. no. 606889
With integrated temperature sensor

Kabel BNC/BNC

Art. no. 602855
Connection cable with 1.5 m length

ST-G1000

Art. no. 611373
Device protection bag with 1 round cut-out

Instruments for hay and straw humidity measurements: see BaleCheck page 51!

SOIL THERMOMETER



HIGHLIGHTS:

- robust probe made of stainless steel
- ergonomic T-handle probe designed for comfortable use

1 M ROBUST PROBE MADE
OF STAINLESS STEEL

SoilTemp 1700

Art. no. 611374
Soil thermometer

General:

The universal display device combined with an extremely robust, but yet ergonomic T-handle probe made of stainless steel allows multiple measurements in soils or bulk materials.

Application:

Silo checking, measurements in soils, waste dumps, silages, compost, etc.

Specifications:

Device:	G 1700
Probe connection:	BNC, Pt1000, 2-wire
Measuring range:	-50.0 ... +250.0 °C
Measuring rod:	Stainless steel, 1000 mm x Ø 10 mm, 1 m connection cable with BNC plug, 350 g, probe handle designed for comfortable use
Scope of supply:	Device, GTF 40 T, battery, manual

Accessories and spare parts:

G 1700

Art. no. 609826
Precise universal thermometer, with BNC connection, without sensor

GTF 40 T-620

Art. no. 606803
Stainless steel insertion probe, FL 620 mm, with 1 m cable and BNC plug

GTF 40 T-1000

Art. no. 606791
Stainless steel insertion probe, FL 1000 mm, with 1 m cable and BNC plug

GTF 40 T-1500

Art. no. 606792
Stainless steel insertion probe, FL 1500 mm, with 1 m cable and BNC plug

ST-G1000

Art. no. 611373
Device protection bag with 1 round cut-out

PRECISION POCKET THERMOMETER WITH PT1000 PROBE

LIQUIDS
AIR / GAS

GTH 175 PT-T



SOFT MEDIA

GTH 175 PT-E

CORE TEMPERATURE
FOOD, Ø 3 mm

GTH 175 PT-K

CORE TEMPERATURE
MEAT, Ø 1.5 mm

GTH 175 PT-G

HIGHLIGHTS:

- Easy handling
- High accuracy and precision

GTH 175 PT-T

Art. no. 600051

Temperature measuring device incl. universal probe

GTH 175 PT-E

Art. no. 600052

Temperature measuring device incl. insertion probe

GTH 175 PT-K

Art. no. 600053

Temperature measuring device incl. Teflon insertion probe

GTH 175 PT-G

Art. no. 601836

Temperature measuring device incl. mini Teflon probe

Application:

Accurate measurements in liquids, as core measuring device (with insertion probe) or for air/gas measurements. Handle and cable of -T and -E are resistant to temperatures up to 100 °C, -K and -G up to 250 °C.

Specifications:

Measuring range: -199.9 ... +199.9 °C**Resolution:** 0.1 °C

Accuracy: 0.1 % of meas. value ± 2 digit (at range: -70.0 ... +199.9 °C), Probe and device are calibrated together, resulting in an error of about 0.1 °C ± 1 digit in range 0 ... 100 °C.

Probes: All probes are permanently connected to device.

GTH 175 PT-T Pt1000, 2-wire, isolated in V4A tube 3 mm Ø and approx. 100 mm long, plastic handle approx. 135 mm long, kink protection and approx. 1 m highly flexible silicone cable

GTH 175 PT-E Probe (V4A, Ø 3 mm x 100 mm) as above, but additional slim insertion tip for all soft media. Handle and cable are resistant to temperatures up to 100 °C.

GTH 175 PT-K Probe (V4A, Ø 3 mm x 100 mm) as above, but with Teflon handle and 1 m Teflon cable. Handle and cable are resistant to air temperatures up to 250 °C.

GTH 175 PT-G

Probe (V4A, Ø 1.5 mm x 100 mm) as above, but with Teflon handle and 1 m Teflon cable. Handle and cable are resistant to air temperatures up to 250 °C.

Response time T_{90} : Ø 3 mm: water 0.4 m/s <2 s;
Ø 1.5 mm: water 0.4 m/s <1 s

Display: 3½-digit, 13 mm high LCD display**Nominal temperature:** +25 °C**Working temperature:** -30 ... +45 °C**Storage temperature:** -30 ... +70 °C**Power supply:** 9 V battery**Battery life:** approx. 200 operating hours**Protection rating:** IP65**Housing:** made of impact-resistant ABS**Dimensions:** approx. 106 x 67 x 30 mm
(H x W x D)**Weight:** approx. 190 g
(incl. battery and probe)**Scope of supply:** device incl. probe, battery, manual

Variants:

GTH 175 PT-T - WD

Art. no. 600050

GTH 175 PT-E - WD

Art. no. 602307

Probe design: water-proof

Probe with PVC cable and sealed handle (max. 100 °C).
(Not possible for GTH 175 PT-K and GTH 175 PT-G)

Special designs upon request: e.g. longer cable or probe tube.

Accessories and spare parts:

GB 9 V

Art. no. 601115

Spare battery

ST-KR

Art. no. 601082

Device protection bag with round cut-out (central)

GKK 1100

Art. no. 601060

Case (340 x 275 x 83 mm) with foam lining

COMPLETE SOLUTIONS



GTH 175 PT-T-WPT2

Art. no. 602670

Complete solution incl. immersion probe and ISO certificate of calibration WPT2 A (0 °C / 70 °C) and case GKK 252.

GTH 175 PT-T-WPT3

Art. no. 602673

Complete solution incl. immersion probe and ISO certificate of calibration WPT3 (-20 / 0 / +70 °C) and case GKK 252.

GTH 175 PT-E-WPT3

Art. no. 602674

Complete solution incl. insertion probe and ISO certificate of calibration WPT3 (-20 / 0 / +70 °C) and case GKK 252.

WATER-PROOF HACCP THERMOMETER WITH PT1000 PROBE



HIGHLIGHTS:

- Easy handling
- Battery life time > 6000 hours
- Device and probe are Water-proof and very robust
- Incl. calibration protocol

GMH 2710-T

Art. no. 602034

Temperature measuring device incl. universal probe

GMH 2710-E

Art. no. 602036

Temperature measuring device incl. insertion probe

GMH 2710-K

Art. no. 602038

Temperature measuring device incl. Teflon insertion probe

GMH 2710-G

Art. no. 602040

Temperature measuring device incl. mini Teflon probe

GMH 2710-F

Art. no. 604035

Single-hand temperature measurement device with integrated immersion probe

GMH 2710-I

Art. no. 604611

Single-hand temperature measurement device with integrated insertion probe

General:

Accurate measurements for laboratories, quality management, and monitoring of production processes

Application:

Food (HACCP), medical / pharmaceutical science, chemistry, aquaristics, fish farming, aquaculture, etc.

GMH 2710-F/-I:

Optimal for measurements at places difficult to access, e.g.

- storage temperature control (especially food)
 - temperature control for food measurements (HACCP)
 - incoming inspection
 - temperature measurements as part of legionellae tests
- These measurements may cause problems with ordinary thermometers.

Specifications:**Measuring range:****GMH 2710-T / -E** -199.9 ... +200.0 °C**GMH 2710-K / -G** -199.9 ... +250.0 °C**GMH 2710-F / -I** -70 ... +250 °C**Resolution:** 0.1 °C**Accuracy:****at -20.0 ... +100.0 °C** ±0.1 °C ±1 digit**at -70.0 ... +200.0 °C** ±0.1 % of meas. value ±2 digit, sensor calibrated with device**Probe:**

Pt1000, 2-wire, isolated, water- and steam-proof, permanently connected to device

GMH 2710-T	plastic handle 135 mm long 1 m PVC cable (max 100 °C) Ø 3 mm / length: 100 mm
GMH 2710-E	plastic handle 135 mm long, additionally with slim insertion tip for all soft media. 1 m PVC cable (max 100 °C) Ø 3 mm / length: 100 mm
GMH 2710-K	design type with big Teflon handle and 1 m Teflon cable, with slim insertion tip, handle and cable are resistant to temperatures up to 250 °C air temperature. Stainless steel kink protection, Ø 3 mm / length: 100 mm
GMH 2710-G	design type with small Teflon handle and 1 m Teflon cable, with slim insertion tip, handle and cable are suitable for permanent application at temperatures up to 250 °C. Stainless steel kink protection, Ø 1.5 mm / length: 100 mm
GMH 2710-F	V4A mantle tube, bendable, Ø 3 mm, length 150 mm
GMH 2710-I	V4A mantle tube with needle-shaped insertion tip, bendable, Ø 3 mm, length 150 mm
Response time T₉₀:	Ø 3 mm: water 0.4 m/s <2 s; Ø 1.5 mm: water 0.4 m/s <1 s
Display:	two 4-digit LCD (12.4 mm and 7 mm)
Nominal temperature:	+25 °C
Working temperature:	-25 ... +50 °C
Storage temperature:	-30 ... +70 °C
Power supply:	2 x AAA batteries
Battery life:	>6000 hours
Protection class:	IP65 / IP67
Housing:	made of impact-resistant ABS
Dimensions:	154 x 81 x 31 mm (H x W x D)
Weight:	215 g (incl. battery and probe)
Scope of supply:	device incl. probe, battery, calibration protocol, manual

Accessories and spare parts:**K 50 BL**

Art. no. 601352

Silicone protection cover blue

K 50 RE

Art. no. 607456

Silicone protection cover red



PRECISION QUICK-RESPONSE THERMOMETER FOR THERMOCOUPLES

- GERMANY
- AUTO OFF
- HOLD
- ISO
- MIN MAX
- 0-CORR

NEW!



VERY QUICK RESPONSE TIME!

- HIGHLIGHTS:
- Serial interface (except GMH 3221)
 - Correction factor for surface measuring can be switched on / off (except GMH 3221)
- GMH 3221, GMH 3231 AND GMH 3251:
- 2 plug-in probes can be connected and read simultaneously
 - Temperature differences

- ADDITIONAL FUNCTIONS
- GMH 3221 / 3231:
- TARA
- GMH 3251:
- TARA
 - ALARM
 - LOGG
 - CLOCK

SUITABLE PROBES P.R.T. P. 32



GMH 3211 connection

GMH 3211
Art. no. 611381
Precision quick-response thermometer, accessories not included, 1 input



GMH 3221 connection

GMH 3221
Art. no. 611382
Simple two channel precision quick-response thermometer, accessories not included, 2 inputs



GMH 3231/51 connection

GMH 3231
Art. no. 611382
Two channel precision quick-response thermometer, accessories not included, 2 inputs, interface

GMH 3251
Art. no. 611383
Two channel precision quick-response thermometer, accessories not included, 2 inputs, data logger

Specifications:	GMH 3211	GMH 3221	GMH 3231	GMH 3251
Thermocouples:	K, J, T, N, S, E, B	K	K, J, T, N, S, E, B	K, J, T, N, S, E, B
Measuring channels:	1 thermocouple input (type K balancing material)	2 thermocouple inputs (type K balancing material)		
Measuring ranges				
type K:	-220.0 ... +1372.0 °C	-220.0 ... +1372.0 °C	-220.0 ... +1372.0 °C	-220.0 ... +1372.0 °C
type J:	-200.0 ... +1100.0 °C	-	-200.0 ... +1100.0 °C	-200.0 ... +1100.0 °C
type T:	-200.0 ... +400.0 °C	-	-200.0 ... +400.0 °C	-200.0 ... +400.0 °C
type N:	-200.0 ... +1300.0 °C	-	-200.0 ... +1300.0 °C	-200.0 ... +1300.0 °C
type S:	-50.0 ... +1768.0 °C	-	-50.0 ... +1768.0 °C	-50.0 ... +1768.0 °C
type E:	-60.0 ... +850.0 °C NEW	-	-60.0 ... +850.0 °C NEW	-60.0 ... +850.0 °C NEW
type B:	+300 ... +1750 °C NEW	-	+300 ... +1750 °C NEW	+300 ... +1750 °C NEW
Accuracy: (at nominal temperature)	±(0.5 °C +0.2 % of m.v.) (J, K, N, T, E) ±(0.8 °C +0.4 % of m.v.) (S, B)	±(0.5 °C +0.2 % of m.v.)		±(0.5 °C +0.2 % of m.v.) (J, K, N, T, E) ±(0.8 °C +0.4 % of m.v.) (S, B)
Analog output:	no	no	no	0 ... 1 V
Alarm:	no	no	no	CH1, CH2, CH1+2, DIF
Data logger:	no	no	no	manual: 1.000 data sets cyclic: 10.000 data sets
Probe connections (miniature flat plug):	1	2	2	2
Serial interface:	3-pin jack connector Ø 3.5 mm	-	3-pin jack connector Ø 3.5 mm	3-pin jack connector Ø 3.5 mm
Difference measurement:	Temperature difference probe 1 - probe 2 can be displayed if 2 probes are connected.			
Compensation value for surface measurements:	adjustable	-	adjustable	adjustable
Power supply:	9 V battery, d.c. connector	9 V battery	9 V battery, d.c. connector	9 V battery, d.c. connector
Battery life:	approx. 500 h	approx. 300 h	approx. 300 h	approx. 300 h

PRECISION QUICK-RESPONSE THERMOMETER FOR THERMOCOUPLES

General specifications:

Resolution:	0.1 °C or 1 °C
Working temperature:	-25 ... +50 °C
Display:	two 4½-digit LCDs (12.4 mm and 7 mm high)
Serial interface (except GMH 3221):	3-pole jack socket Ø 3.5 mm, direct connection to RS232 or USB interface of a PC via electrically isolated interface adapter GRS 310x or USB 3100 N (p.r.t. accessories).
Data logger (GMH 3251 only):	manual: 1.000 data sets (fetch data via buttons or interface) cyclic: 10.000 data sets (fetch data via interface) adjustable cycle time: 1 s ... 1 h The logger is started or stopped by keypad or interface. The software GSOF 3050 (see accessories) is available for comfortable read-out of logger data, see page 109.
Housing:	Impact-resistant ABS plastic housing, membrane keyboard, transparent panel, integrated pop-up clip
Dimensions:	142 x 71 x 26 mm (H x W x D)
Nominal temperature:	25 °C ±5 K
Weight:	approx. 155 g
Scope of supply:	device, battery, calibration protocol, manual

Accessories and spare parts:

GB 9 V

Art. no. 601115
Spare battery 9 V

GNG 10/3000

Art. no. 600273
Plug-in power supply (220 / 240 V, 50 / 60 Hz), output voltage: 10.5 V / 10 mA, suitable for devices with power supply socket

ST-RN

Art. no. 601074
Nappa leathern device protection bag with 2 round cut-outs for sensor connection (1 x round, 1 x rectangular)

ST-N2

Art. no. 601072
Nappa leathern device protection bag with 2 rectangular cut-outs for sensor connection

GKK 3500

Art. no. 601052
with punched lining for 1 device (394 x 294 x 106 mm)

16 CHANNEL PRECISION QUICK-RESPONSE THERMOMETER FOR THERMOCOUPLES



HIGHLIGHTS:

- simultaneous display of 4 inputs
- 800.000 measuring data storable
- for thermocouples type K, J, T, N, R, S, B, E

16 INTERCHANGEABLE
SENSORS CONNECTABLE



HD32-8-16

Art. no. 700077

Precision quick-response thermometer without accessories, 16 interchangeable sensor inputs, with data logger

General:

Ideal for complex temperature measuring tasks in which multiple temperature values must be measured, recorded and displayed at the same time.

Application:

Testing systems, drying and baking ovens, air conditioning control units, production and manufacturing processes, temperature monitoring in concrete or asphalt on roads and buildings

Specifications:

Thermocouples:	K, J, T, N, R, S, B, E	
Resolution:	0.05 °C or 0.1 °C	
Measuring range: (depends on thermocouple)	Type K: -200 °C ... +1370 °C	Type R: +200 °C ... +1480 °C
	Type J: -100 °C ... +750 °C	Type S: +200 °C ... +1480 °C
	Type T: -200 °C ... +400 °C	Type B: +200 °C ... +1800 °C
	Type N: -200 °C ... +1300 °C	Type E: -200 °C ... +750 °C
Accuracy: (depends on thermocouple)	±0.1 ... ±0.4 °C	
Number of inputs:	16	
Operating conditions:	-5 ... +50 °C working temperature, -25 ... +65 °C storage temperature, 0 ... 90 % relative humidity	
Logger function:	800.000 data sets	
Display:	LCD display with background illumination, 128 x 64 pixel, simultaneous display of 4 inputs	
Serial interface:	Communication via galvanically isolated 9-pin USB connecting cable	
Power supply:	4 x 1,5 V Alkaline Batterie, über externes 12 V DC Netzteil oder über die Schnittstelle am PC	
Housing:	ABS, IP64	
Dimensions:	220 x 180 x 50 mm	
Weight:	1100 g	
Scope of supply:	Device, DeltaLog9 Software, carrying strap, batteries, manual	

Accessories and spare parts:

SWD-10

Art. no. 700039
power supply, 100 ... 240 V AC/12 V DC/1 A mains voltage

CP22

Art. no. 700078
Connection cable USB 2.0 for connection to PC.

Note:

Connection cable for PC and temperature sensors (page 32) must be ordered separately.

QUICK RESPONSE THERMOMETER TYPE K

PRECISION QUICK RESPONSE THERMOMETER TYPE K



GTH 1150



GMH 1150



AUTO OFF

HOLD

ISO

MIN MAX

0/5-CORR



GTH 1170



GMH 1170

GTH 1150

Art. no. 600047

Quick response thermometer, accessories not included, for plug-in probes

GMH 1150

Art. no. 600045

Quick response thermometer, accessories not included, for plug-in probes

Application:

Quick response measurements on surfaces, in liquids, soft media, air/gases, at the smallest objects etc. For all applications where a resolution of 1 °C is sufficient.

Specifications:

Measuring range:	-50 ... +1150 °C
Resolution:	1 °C
Accuracy: (at nominal temperature = 25 °C)	≤1 % ±1 digit (from -20 ... +550 and 920 ... 1150 °C) ≤1.5 % ±1 digit (from 550 ... 920 °C) from -20 ... -50 °C according to attached correction table
Probe connection:	Thermoelectric-voltage-free miniature socket, suitable for all type K (NiCr-Ni) measuring sensors with mini flat plug
Display:	3½ digit, approx. 13 mm high LCD
Working temperature:	0 ... 45 °C
Storage temperature:	-20 ... +70 °C
Power supply:	9 V battery (included), Additional at GMH 1150: d.c. connector for external 10.5 ... 12 V direct voltage supply. (suitable power supply: GNG10/3000)
Battery life:	approx. 700 operating hours
Dimensions:	GTH 1150: approx. 106 x 67 x 30 mm (H x W x D). Impact resistant ABS plastic housing GMH 1150: approx. 142 x 71 x 26 mm (H x W x D). Impact-resistant ABS plastic housing, membrane keyboard, transparent panel, integrated pop-up clip
Weight:	approx. 150 g (GTH 1150), approx. 160 g (GMH 1150)
Scope of supply:	Device, battery, manual

Accessories and spare parts:**GTF 300**

Art. no. 600072

wire probe

additional NiCr-Ni probes (type K)

p.r.t. page from 32

GB 9 V

Art. no. 601115

spare battery

GNG 10 / 3000

Art. no. 600273

power supply

ST-KN

Art. no. 601080

device protection bag, suitable for GTH 1150

ST-N1

Art. no. 601070

device protection bag, suitable for GMH 1150

GTH 1170

Art. no. 600000

Precision quick response thermometer, accessories not included, for plug-in probes

GMH 1170

Art. no. 600113

Precision quick response thermometer, accessories not included, for plug-in probes

Application:

Quick response measurements on surfaces, in liquids, air/gases etc.

Specifications:

Measuring range:	-65.0 ... +199.9 °C or -65 ... +1150 °C (-85.0 ... +199.9 °F or -85 ... +1999 °F)
Resolution:	0.1 °C or 1 °C (0.1 °F or 1 °F)
Accuracy: ±1 digit (at nominal temperature)	-65.0 ... +199.9 °C: ±0.05 % of m.v. ±0.2 % FS -65 ... +1150 °C: ±0.1 % of m.v. ±0.2 % FS
Temperature drift:	0.01 %/K
Point of comparison:	±0.3 °C
Probe connection:	Thermoelectric-voltage-free miniature socket, suitable for all type K (NiCr-Ni) measuring sensors with mini flat plug
Display:	3½ digit, LCD display approx. 13 mm high
Working temperature:	-25 ... +50 °C
Storage temperature:	-25 ... +70 °C
Power supply:	9 V battery
Measuring interval:	approx. 3 meas. / s
Battery life:	approx. 2000 operating hours
Dimensions:	GTH 1170: approx. 106 x 67 x 30 mm (H x W x D), impact resistant ABS plastic housing; GMH 1170: approx. 142 x 71 x 26 mm (H x W x D), Impact-resistant ABS plastic housing, membrane keyboard, transparent panel, integrated pop-up clip
Weight:	approx. 135 g (GTH 1170), approx. 150 g (GMH 1170)
Scope of supply:	Device, battery, manual

Accessories and spare parts:**NiCr-Ni (Typ K)-Fühler**

ab Seite 32

GB 9 V

Art. no. 601115

spare battery

ST-KN

Art. no. 601080

device protection bag, suitable for GTH 1150

ST-N1

Art. no. 601070

device protection bag, suitable for GMH 1170

GTH 1170-GTF 900-WPT

Art. no. 602675

Complete Solution incl. immersion probe GTF 900 and certificate of calibration WPT (with meas. points: 0 / 100 / 250 / 500 °C) and case GKK 1100.



THERMOMETER/DATALOGGER WITH PT100 AND THERMOCOUPLE INPUT

NEW!



HIGHLIGHTS:

- Input for Pt100 sensor (SICRAM plug) and thermocouple
- Data logger function
- USB connection and software for realtime monitoring



SUITABLE THERMOCOUPLES OF TYPE K, J, T, N, E AND CORRESPONDING SENSOR SPECIFICATIONS STARTING ON PAGE 32

HD 2178.2

Thermometer mit zwei Eingängen (1 x Pt 100, 1 x Thermoelement) mit großem LCD Display und Datenloggerfunktion

General:

The HD2178.2 can be used with Pt 100 sensors and with thermocouples. Pt 100 sensors with SICRAM plugs (8-pin DIN 45326 plug) can be connected to connection B. The SICRAM plug already has all of the sensor data, including serial number and calibration data. A thermocouple of the type K, J, T, N and E with miniature flat plug can be connected to connection A. The data logger stores up to 80,000 measurements, which can be transferred conveniently via USB cable and supplied software. Battery operation, large display and durability make the HD2178.2 a perfect all-rounder. Of course, the HD2178.2 also offers MAX, MIN, AVG, REL and HOLD functions.

Application:

With the large variety of available sensors (as contact, immersion, insertion or air temperature sensors), a multitude of applications in the widest range of sectors opens up.

Specifications:

Display:	LCD, 52 x 42 mm
Operating temperature:	-5 ... +50 °C (Instrument)
Protection degree:	IP 66
Power supply:	4 batteries 1.5 V type AA (Optional mains adapter)
Unit of measurement:	°C or °F
Security of stored data:	Unlimited, independent of battery charge conditions
Measured values storage:	2000 pages each one containing 40 samples, quantity 80000 samples in total
Storage interval:	1, 5, 10, 15, 30 s; 1, 2, 5, 10, 15, 20, 30 min; 1 h
USB interface:	USB 2.0, type B mini USB connection
Housing:	Material: ABS plastic, rubber
Dimensions:	185 x 90 x 40 mm
Weight:	470 g (complete with batteries)
Scope of supply:	Device including batteries, case for HD 2178.2, DeltaLog 9 software. Measuring probes, connecting cable and mains adapter are not included in the scope of supply.

Pt100 sensor with SICRAM plug selection
(Additional versions available on request, including ball temperature)

Example: TP 472 I (immersion sensor)



Immersion probe, -196 ... +500 °C, ±0.25 °C (-196 ... +300 °C), Ø 3mm, sensor length 300 mm, cable length 2 m

Accessories and spare parts:

CP23

USB connecting cable (mini USB plug on the device and PC USB plug)

SWD10

Art. no. 700039

Stabilised mains adapter, 100 ... 240 VAC, 12 VDC 1 A

Recommended accessories (PT100 sensor with SICRAM plug):

TP 472 I

Immersion probe, Pt100, Ø 3 mm, length 300 mm, cable length 2 m, measuring range: -196 ... +500 °C, Accuracy: ±0.25 °C (-196 ... +300 °C), ±0.5 °C (+300 ... +500 °C)

TP 472 I.O

Immersion probe, Pt100, Ø 3 mm, length 230 mm, cable length 2 m, measuring range: -50 ... +300 °C, Accuracy: ±0.25 °C (-50 ... +300 °C)

TP 473 P.I

Insertion probe, Pt100, Ø 4 mm, length 150 mm, cable length 2 m, Measuring range: -50 ... +400 °C, Accuracy: ±0.25 °C (-50 ... +300 °C), ±0.5 °C (+300 ... +400 °C)

TP 473 P.O

Insertion probe, Pt100, Ø 4 mm, length 150 mm, cable length 2 m, Measuring range: -50 ... +300 °C, Accuracy: ±0.25 °C (-50 ... +300 °C)

TP 474 C.O

Contact probe, Pt100, Ø 4 mm, length 230 mm, contact surface Ø 5 mm, cable length 2 m, Measuring range: -50 ... +300 °C, Accuracy: ±0.3 °C (-50 ... +300 °C)

TO 475 A.O

Air probe, Pt100, Ø 4 mm, length 230 mm, cable length 2 m, Measuring range: -50 ... +250 °C, Accuracy: ±0.3 °C (-50 ... +250 °C)

TP47

SICRAM plug for connection of Pt sensors without SICRAM connection (4-wire direct Pt 100, 2-wire Pt 1000)

TYPE K - MEASURING PROBE (NICR-NI) WITH DIN-TYPE FLAT-PIN PLUG

Accuracy Thermocouples:

Sensor accuracy acc. to DIN EN 60584-1:2014-07


Class 1 for Type K: $\pm 1.5^{\circ}\text{C}$ at range $-40 \dots +375^{\circ}\text{C}$ **Class 1 for Type N:** $\pm 1.5^{\circ}\text{C}$ at range $-40 \dots +375^{\circ}\text{C}$ **Class 1 for Type S:** $\pm 1^{\circ}\text{C}$ at range $0 \dots 1100^{\circ}\text{C}$

basic fee for custom made probe

GTF 400

Art. no. 600502

Immersion probe


 $-65 \dots +550^{\circ}\text{C}$ **VERY FAST**

inexpensive, fast, elastic (rigid)

non-corrosive V4A tube $\varnothing 1.5$ mm, L=130 mm, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug**Response time T_{90} :** water 0.4 m/s <1 s**GTF 900**

Art. no. 600505

Immersion probe


 $-65 \dots +1000^{\circ}\text{C}$ 

inexpensive, elastic (rigid)

non-corrosive V4A tube $\varnothing 3$ mm, L=130 mm, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug**Response time T_{90} :** water 0.4 m/s <2 s, air 2 m/s approx. 40 s**GTF 1200**


Art. no. 600507

Immersion probe with sheathed thermocouple

 $-200 \dots +1150^{\circ}\text{C}$ **BENDABLE**Inconel 600 jacket tube $\varnothing 1.5$ mm, flexible, L=150 mm, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug**Response time T_{90} :** water 0.4 m/s approx. 3 s**GTF 1200/300**


Art. no. 600510

Immersion probe with sheathed thermocouple

 $-200 \dots +1150^{\circ}\text{C}$ **BENDABLE
POTENTIAL FREE**Inconel 600 jacket tube $\varnothing 3$ mm, flexible, L=300 mm, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug**Response time T_{90} :** water 0.4 m/s approx. 5 s**GTF 1000 AL**

Art. no. 600512

Immersion probe with sheathed thermocouple


 $-200 \dots +1000^{\circ}\text{C}$ **VERY ROBUST**

for aluminium melt, non-ferrous metal, etc.

V4A tube $\varnothing 6 \times 1.4$ mm, L=1000 mm rigid, additional internal mantle thermocouple, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug**Response time T_{90} :** water 0.4 m/s approx. 30 s -65°C
 $+900^{\circ}\text{C}$ **GOF 130**

Art. no. 600490

Surface probe


 $-65 \dots +900^{\circ}\text{C}$ **VERY FAST**

for any solid surface;

2 laser welded NiCr-Ni resilient springs, V4A-tube $\varnothing 8$ mm, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug**Response time T_{90} :** approx. 5 s -65°C
 $+900^{\circ}\text{C}$ **GOF 900 HO**

Art. no. 600500

Surface probe

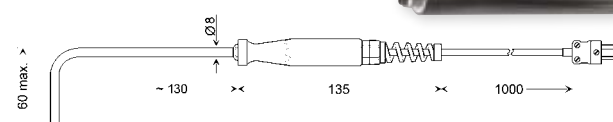 $-65 \dots +900^{\circ}\text{C}$ 


for any solid surface

2 laser welded NiCr-Ni resilient springs, bendable V4A-tube, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug

Response time T_{90} : approx. 5 s -65°C
 $+400^{\circ}\text{C}$ **GOF 200 HO**

Art. no. 600492

Surface probe

 $-65 \dots +400^{\circ}\text{C}$ 


for fastest measurements in small gaps

Small elbow-type, flexible thermocouple tapes, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug

Response time T_{90} : approx. 2 s -65°C
 $+400^{\circ}\text{C}$ **GOF 400 HO**

Art. no. 600494

Surface probe

 $-65 \dots +400^{\circ}\text{C}$ 


for fastest measurements

Small elbow-type, flexible thermocouple tapes, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug

Response time T_{90} : approx. 2 s -65°C
 $+400^{\circ}\text{C}$ **GOF 400 VE**

Art. no. 600496

Surface probe

 $-65 \dots +400^{\circ}\text{C}$ 

for fastest measurements, flexible thermocouple tapes, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug

Response time T_{90} : approx. 2 s**MH 400VE**

Art. no. 607502

magnet holder, heat resistant up to 100°C 

TYPE K - MEASURING PROBE (NICR-NI) WITH DIN-TYPE FLAT-PIN PLUG


-65 °C
+500 °C

GOF 500

Art. no. 600488

Surface probe

-65 ... +500 °C



for any straight and solid surface; solid copper plate, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug

Response time T_{90} : approx. 10 s


-200 °C
+500 °C

GOF 500 HO

Art. no. 600498

Surface probe

-200 ... +500 °C, (potential free)



for any straight and solid surface, small elbow-type, solid copper plate, Ø 1.5 MTE (K) Inconel 600 bendable, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug

Response time T_{90} : approx. 20 s


-65 °C
+500 °C

GOF 130 CU

Art. no. 600486

Surface probe

-65 ... +500 °C



for any straight and solid surface
Spring-loaded copper plate, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug

Response time T_{90} : approx. 5 s


-65 °C
+500 °C

GES 20K

Art. no. 602591

Core temperature- / food probe

-65 ... +500 °C



Use for canteen kitchen, bakeries, butcher's shops, etc.
V4A tube with Ø 1.5 mm slim insertion tip, small Teflon handle, stainless steel kink protection, 1 m Teflon cable, miniature flat plug

Response time T_{90} : water 0.4 m/s < 1 s, air 2 m/s approx. 12 s


-50 °C
+250 °C

GES 21K

Art. no. 600074

Core temperature- / food probe

-50 ... +250 °C, potential-free



Use for canteen kitchen, bakeries, butcher's shops, etc.
V4A tube Ø 3 mm with needle-shaped insertion tip, big white teflon handle, stainless steel kink protection, 1 m Teflon cable, miniature flat plug

Response time T_{90} : water 0.4 m/s < 2 s, air 2 m/s approx. 40 s


-65 °C
+550 °C

GES 130

Art. no. 600514

Insertion probe for soft media

-65 ... +550 °C



V4A tube with Ø 1.5 mm slim insertion tip, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug

Response time T_{90} : water 0.4 m/s approx. 1 s, air 2 m/s approx. 1.5 s


-65 °C
+550 °C

GES 500

Art. no. 600516

Insertion probe for soft media

-65 ... +550 °C



V4A tube with Ø 3 mm with needle-shaped insertion tip, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug

Response time T_{90} : water 0.4 m/s < 2 s


-65 °C
+1000 °C

GES 900

Art. no. 600518

Insertion probe for soft media

-65 ... +1000 °C



Spring-loaded V4A tube with slim Ø 3 mm insertion tip, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug

Response time T_{90} : water 0.4 m/s approx. 5 s


-65 °C
+600 °C

GTL 130

Art. no. 602304

Air/gas probe

-65 ... +600 °C



for room temperature, flue gases, etc.
perforated V4A protective tube, fused thermocouple wires arranged behind, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug

Response time T_{90} : air 2 m/s approx. 15 s


-65 °C
+200 °C

GKF 125

Art. no. 600520

Probe for compost, grain, etc.


-65 ... +200 °C



split-second response time, yet highly resilient
V4A tube Ø 8 mm reduced to Ø 3 mm at the front, plastic handle, anti-buckling glanding, 1 m silicone cable, miniature flat plug


Response time T_{90} : water 0.4 m/s approx. 6 s

TYPE K - MEASURING PROBE (NICR-NI) WITH DIN-TYPE FLAT-PIN PLUG

-65 °C
+550 °C**GAF 200**Art. no. 600522
Asphalt probe
-65 ... +550 °C

for liquid or soft media etc.
V4A tube 8 mm dia. reduced to 3 mm, plastic handle, anti-buckling glanding, spiral cable stretchable to 1.2 m, DIN-type flat-pin plug

Response time T_{90} : water 0.4 m/s approx. 6 s

-50 °C
+200 °C**GRF 200**Art. no. 604663
Tire probe
-50 ... +200 °C


fast response insertion probe with stop screw (needle adjustable 0 ... approx. 14 mm). Suitable for measuring temperature of tires and other soft media. Plastic handle, anti-buckling glanding, spiral cable (approx. 1.2 m drawn out), miniature flat plug

Response time T_{90} : approx. 5 s

-65 °C
+150 °C**GTZ 300**Art. no. 603287
Clip-on probe
-65 ... +150 °C


for temperature measurements at tube surfaces
for tubes up to approx. 25 mm Ø, 1 m silicone cable, miniature flat plug

Response time T_{90} : approx. 3 s

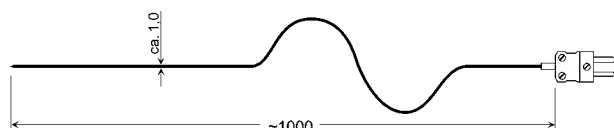-65 °C
+300 °C**GTF 300**Art. no. 600072
Wire probe for quick-response measurements
Measuring tip twisted/fused**GTF 300-UV**Art. no. 600081
Wire probe for quick-response measurements
Measuring tip non-twisted/fused**GTF 300-SP**Art. no. 605973
Wire probe for quick-response measurements
Measuring tip with weld bead
-65 ... +300 °C, insulation up to +250 °C


for air, gases, diminutive surfaces
Teflon-insulated twisted Ø 0.2 mm thermocouple wires, fused measuring tip, very flexibel, miniature flat plug

Response time T_{90} : water 0.4 m/s approx. 0.3 s

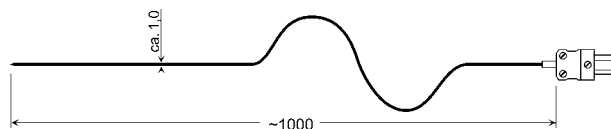-65 °C
+400 °C**GTF 300 GS**Art. no. 602554
Wire probe for quick-response measurements
twisted measuring tip**GTF 300 GS-UV**Art. no. 607893
Wire probe for quick-response measurements
Measuring tip non-twisted/fused**GTF 300 GS-SP**Art. no. 606208
Wire probe for quick-response measurements
Measuring tip with weld bead
-65 ... +400 °C

for air, gases, diminutive surfaces (not for liquids)
glass filament insulated Ø 0.2 mm thermocouple wires, miniature flat plug

Response time T_{90} : water 0.4 m/s approx. 0.3 s
Additional charge for any length per m

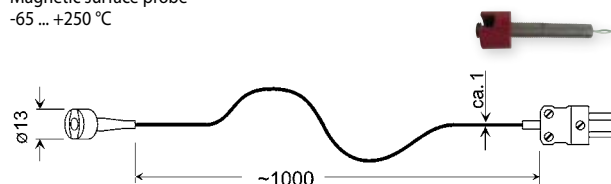-65 °C
+250 °C**GMF 250**Art. no. 600071
Magnetic surface probe
-65 ... +250 °C


self-adhesive on magnetic materials, spring-loaded CU plate Ø 5 mm, 1 m Teflon-insulated twisted cable, miniature flat plug

Response time T_{90} : approx. 5 s

-65 °C
+200 °C**GMF 200**Art. no. 601377
Magnetic surface probe
-65 ... +200 °C

self-adhesive on magnetic materials (higher magnetic holding force), spring-loaded CU plate Ø 5 mm, resilient 2 m long silicone cable, miniature flat plug

Response time T_{90} : approx. 5 s

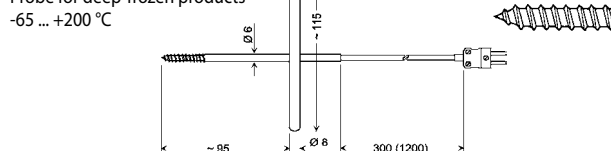-65 °C
+200 °C**GGF 200**Art. no. 603418
Probe for deep-frozen products
-65 ... +200 °C

to screw into deep-frozen products, etc. no predrilling required, V4A-tube, 6 mm Ø with screw prod, spiral cable (approx. 1.2 m drawn out), DIN-type flat-pin plug


Response time T_{90} : approx. 15 s

TYPE K - MEASURING PROBE (NICR-NI) WITH DIN-TYPE FLAT-PIN PLUG

-50 °C
+250 °C

GKF 250

Art. no. 600141
Cable lug probe
-50 ... +250 °C

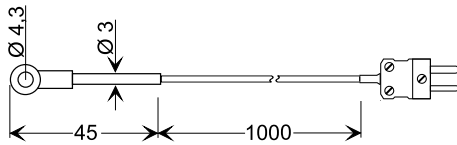

For tightening with suitable screw (standard M4), 1 m Teflon cable, miniature flat plug

Response time T_{90} : approx. 10 s

-50 °C
+500 °C

GLS 500

Art. no. 602962
Soldering tip probe
-50 ... +500 °C (for short time)




for direct connection to instrument
2 laser-fused spring-loaded spiral springs made of NiCr-Ni, ceramic tube approx. 6 mm in diameter, miniature flat plug

Response time T_{90} : approx. 2 s

-65 °C
+400 °C

GTO 130 OK

Art. no. 600134
Air-/Gas probe
-65 ... +400 °C

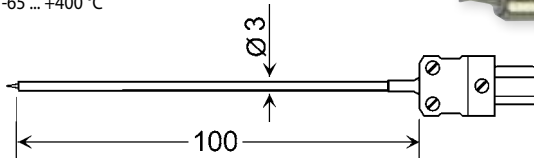


changeable probe without cable, limited suitable also for surfaces
NiCr-Ni-wire Ø 0.5 mm, welded and grinded flat, V4A-tube Ø 3 mm, DIN-type flat-pin plug, rigid connection

Response time T_{90} : approx. 2 s

-65 °C
+400 °C

GTE 130 OK

Art. no. 601483
Insertion probe
-65 ... +400 °C

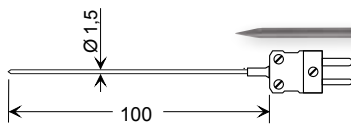


interchangeable probe without cable for soft media
Spring-loaded V4A tube with slim Ø 1.5 mm insertion tip, miniature flat plug with a rigid connection

Response time T_{90} : water 0.4 m/s < 1 s

-200 °C
+1150 °C

GTT-15-150

Art. no. 607552
Immersion probe
-200 ... +1150 °C



for air, gases, and liquids
Sheathed thermocouple with Inconel 600 jacket tube Ø 1.5 mm, bendable, miniature flat plug with a rigid connection


Response time T_{90} : water 0.4 m/s approx. 3 s

+50 °C
+1550 °C

GBF 1550

Art. no. 603037
Bunsen burner probe - type S
+50 ... +1550 °C

FOR HIGHEST TEMPERATURES

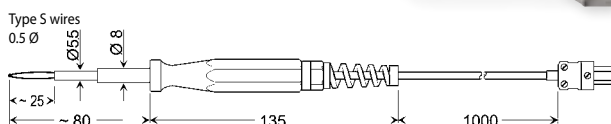


Probe tip may be directly exposed into the flame
V4A tube Ø 8 mm, with reduced Ø 5.5 mm ceramic tube, plastic handle, silicone cable, miniature flat plug

Response time T_{90} : approx. 2 s

-65 °C
+550 °C

GF 1TK-T3

Art. no. 609695
Ø 3 mm immersion sensor
-65 ... +550 °C, type K, class 1



Immersion probe Ø 3 mm made of V4A tube, black silicone handle -50 ... +250 °C, 1 m silicone cable -50 ... +200 °C, probe and silicone handle IP67, mini flat connection

Response time T_{90} : Water 0.4 m/s < 2 s, air 2 m/s approx. 40 s


Variants:**GF 1TK-T3-LE**

Art. no. 609696
with loose ends

-65 °C
+550 °C

GF 1TK-E3

Art. no. 609697
Ø 3 mm insertion sensor
-65 ... +550 °C, type K, Class 1

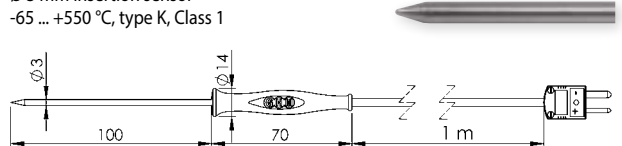

Insertion probe Ø 3 mm made of V4A tube, black silicone handle -50 ... +250 °C, 1 m silicone cable -50 ... +200 °C, probe and silicone handle IP67, mini flat connection

Response time T_{90} : Water 0.4 m/s < 2 s, air 2 m/s approx. 40 s


Variants:**GF 1TK-E3-LE**

Art. no. 609698
with loose ends

-65 °C
+550 °C

GF 1TK-E1.5

Art. no. 609699
Ø 1.5 mm extra-thin insertion sensor
-65 ... +550 °C, type K, Class 1



Insertion probe Ø 1.5 mm made of V4A tube, black silicone handle -50 ... +250 °C, 1 m silicone cable -50 ... +200 °C, probe and silicone handle IP67, mini flat connection

Response time T_{90} : water 0.4 m/s < 1 s, air 2 m/s approx. 15 s


Variants:**GF 1TK-E1.5-LE**

Art. no. 609700
with loose ends

GF 1TK-L3

Art. no. 611299
Ø 3 mm air sensor for clean media
-65 ... +400 °C, type K, Class 1

NEW!

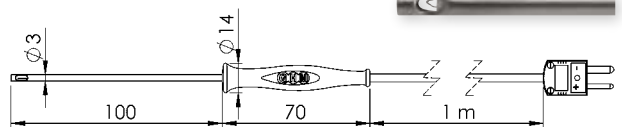

(use GF 1TK-T3 for contaminated media), perforated V4A tube Ø 3 mm, freely arranged measuring element, black silicone handle -50 ... +250 °C, 1 m silicone cable -50 ... +200 °C, mini flat connection

Response time T_{90} : air 2 m/s approx. 15 s

Variants:**GF 1TK-L3-LE**

Art. no. 611300
with loose ends

INFRARED



	MT 400	GIM 530 MS	ST 512	GIM 3590
APPLICATION:				
Precision measurement		•		•
Fast scanning of surfaces	•	•	•	•
Food	•	•	•	•
Quality management	•	•	•	•
EQUIPMENT:				
Measuring range [°C]	-20 ... +343	-32 ... +530	-50 ... +1000	-35 ... +900
Laser	single	single	dual	cross
Additional probe connection				Type K
Optical resolution (Distance / Spot size)	8:1	20:1	30:1	75:1
Emissivity	fest auf 0.95	0.100 ... 1.000	0.10 ... 1.00	0.100 ... 1.100
General functions	Min/Max, Hold	Min/Max, Hold, Offset	Min/Max, Hold	Min/Max, DIF, Hold, AVG
Alarm		optical, acoustical		optical, acoustical
Data storage and visualisation / interface				100 measuring protocols, software for visualisation / •
DEVICE INFORMATION:				
Catalogue page	Page 37	Page 37	Page 38	Page 38

INFORMATION

Infrared measurement

Infrared measurements can be used to measure the temperature of a surface on a device under test without the need to come into contact with that surface (except objects with a shiny metal surface; glass suitable under certain conditions). The IR sensor measures the infrared radiation emitted by the device under test. The measurement is supported by a laser which designates the surface measured by the optical measuring system.

Properties:

- Ultrafast and contactless surface measurement
- For measurement tasks that cannot be accomplished using PT100 or type K devices (e.g. abrasive chemicals, small components, ...)

INFRARED THERMOMETER

**MT 400**

Art. no. 601438

Infrared thermometer with laser

General:

The MT 400 is small, lightweight and easy-to-use. Just aim, trigger and read the temperature from the display... and that's it. Anyone, who searches for fast and reliable temperature measurement, should take a closer look on the MT 400 infrared thermometer.

Application:

- **Electrics** - locating overheated cables and contacts
- **Heating / ventilation / air-conditioning** monitoring of heat exchanger
- **Food** - Checking food temperature during keeping warm or storing

Specifications:

Measuring range:	-20 °C ... +343 °C
Resolution:	0.1 °C, 0.1 °F
Accuracy: (at 18 °C ... 28 °C and <80 % RH)	
< -7 °C:	±4 °C
≥ -7 °C:	±2 % of meas. value +2 °C

Optical resolution (D/S): approx. 8:1

Response time (t₉₅): <1 s

Spectral range: 8 ... 14 μm

Emission rate: permanently set to 0.95

Sight: single laser

Working temperature: 0 ... 50 °C

Storage temperature: -20 ... +60 °C

Power supply: 9 V battery

Features: °F, background illumination

Dimensions: 82 x 41,5 x 160 mm (B x T x H)

Weight: 180 g

Scope of supply: Device, battery, manual

Accessories and spare parts:**GB 9 V**


Art. no. 601115

spare battery

GKK 3100

Art. no. 601058

case with foam lining (275 x 229 x 83 mm)



MT 400

INFRARED THERMOMETER WITH PRECISION GLASS OPTIC

**HIGHLIGHTS:**

- Adjustable visible and audible alarm
- Constant measuring area in between the distance of 13 to 140 mm
- Targeting laser for exact aiming of the object to be measured
- Fast scanning of hot and cold spots within 0.3 s

**GIM 530 MS**

Art. no. 601229

Infrared thermometer with laser

General:

User-friendly industrial design combined to state of the art technology are setting a new standard in professional and all day non-contact temperature measuring. The large temperature range of -32 ... +530 °C, the targeting laser and the optical resolution of 20:1 allow very precise measuring of surfaces in a variety of applications. Simply aim at the target with the laser, push the trigger and the value is displayed within 0.3 seconds plus several other informations.

Application:

- Electrical and mechanical service and maintenance
- Heating, ventilation, air-conditioning - finding thermal bridges etc.
- Motor vehicle diagnosis, electricity, home improvement
- Checking food temperature during keeping warm or storing

Measuring range: -32 ... +530 °C (-20 ... +980 °F)

Resolution: 0.1 °C (0.1 °F)

Temperature display: °C or °F selectable

System accuracy: (at ambient temperature = 23 °C ±5 °C)

±1 % or ±1 °C 0 ... 530 °C (highest value shall be valid)

±1 °C ±0,07 °C/°C 0 ... -32 °C

Repeat accuracy: ±0.5 % or ±0.7 °C from 0 °C ... 530 °C (highest value shall be valid)
±0.7 °C ±0.05 °C/°C from 0 °C ... -32 °C

Optical Resolution (D/S): 20 : 1

Response time (t₉₅): 0.3 s

Spectral range: 8 ... 14 μm

Emission rate: 0,100 ... 1,000, free selectable

Laser: <1 mW laser class IIa

Configuration: Min/Max/Scan/Hold/Offset/°C/°F

Display illumination: yes

Alarm function: optical and acoustic HIGH-/LOW-alarm

Working temperature: 0 ... 50 °C

Storage temperature: -20 ... +60 °C (without battery)

Power supply: 9 V alkaline battery

Battery life: approx. 20 hours for use with laser and illumination

Dimensions: 190 x 38 x 45 mm (L x B x T)

Weight: ca. 150 g

Scope of supply: Device, battery, manual, device bag made of nylon

Accessories and spare parts:**GKK 252**

Art. no. 601056

small case (235 x 185 x 48 mm) with foam lining


ISO-WPT

Art. no. 600888

testpoints at +23 °C, +166 °C, +500 °C

**Display**

- current temperature value
- MIN-/MAX-value: current and last
- HIGH-/LOW-alarm
- HOLD-function
- emission rate
- symbol for display illumination and laser

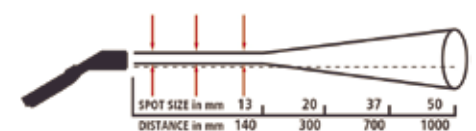

optical diagram:

ratio: spot size / distance

INFRARED THERMOMETER



HIGHLIGHTS:

- Dual laser
- Alarm function

ST 512

Art. no. 600004

Infrared thermometer with dual laser

Application:

- **Monitoring of circuit boards:** overheated parts
- **Heating / ventilation / air-conditioning:** detecting bad isolation, untight pipes, energy consumption, general service measurements, etc.
- **Electrical systems, machines, power engines:** detecting hot spots at electric connections, temperature rises at motors, bearings, pumps, compressors, etc.
- **Food processing and monitoring:** food temperature, process temperature, etc.
- **Medical technology, biological and chemical analysis:** contact-free temperature measurements within seconds, no longer problems with dangerous, aggressive or similar media
- **Industry, engineering, craft:** Surface temperature measurements of rotating parts (barrels, drums, shafts, printing machines, plastic welding, bitumen, concrete, etc.)

Specifications:


Measuring range:	-50 ... +1000 °C	
Resolution:	0.1 °C	
Accuracy: (at ambient temperature = 23 °C ... 25 °C)	-50 °C ... -23 °C	±7 °C (typical)
	-23 °C ... -2 °C	±4 °C
	-2 °C ... +94 °C	±2.5 °C
	94 °C ... 204 °C	±(1.0 % of meas. value + 1 °C)
	204 °C ... 426 °C	±(1.5 % of meas. value + 1 °C)
	426 °C ... 1000 °C	±(3 % of meas. value + 1 °C)
Reproducibility:	±0.5 % of meas. value or ±1 °C	
Response time (t₉₉):	150 ms	
Emission rate:	0.10 ... 1.00, selectable	
Spectral range:	8 ... 14 µm	
Optical resolution (D/S):	approx. 30:1	
Sight:	dual laser	
Power supply:	9 V battery	
Display:	LCD-display with function indicator symbols and background illumination	
Operating conditions:	0 ... 50 °C, 10 ... 90 % RH	
Storage temperature:	-10 ... +60 °C	
Features:	HOLD, Min-/Max, °F, LOCK, Alarm	
Alarm function:	selectable min / max alarm, with integrated buzzer	
Dimensions:	146 x 104 x 43 mm	
Weight:	163 g	
Scope of supply:	Device, battery, manual	

Accessories and spare parts:

ISO (25 / 100 / 200 °C)

Art. no. 607071

Initial calibration at first delivery

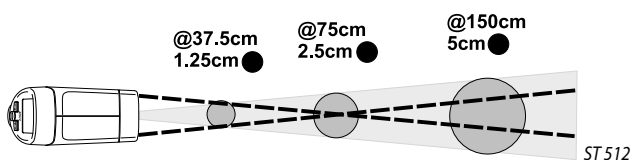

ST 512

INFRARED THERMOMETER



HIGHLIGHTS:

- with thermocouple input
- incl. software and calibration protocol

GIM 3590

Art. no. 600005

Infrared thermometer with cross-hair laser

General:

- The measured point will be marked exactly with the precision of a laser cross-hair. The integrated sharp point optics allows measurements of even smallest measuring objects down to 1 mm. Its position sensor turns the display always to the most comfortable orientation.
- switchable focus point optics
 - laser cross-hair shows real measuring point size
 - Flip-display
 - additional thermocouple input
 - USB interface and graphical software

Specifications:

Measuring range:	-35.0 ... +900.0 °C (IR and thermocouple type K)	
TC input:	thermocouple type K	
Resolution:	0.1 °C	
Accuracy IR:	±0.75 °C or ± 0.75 % of m.v.	
Accuracy Type K:	±0.75 K or ± 1 % of m.v. (at 23 °C ±5 °C)	
Response time (t₉₉):	150 ms	
Optical Resolution:	75:1	16 mm @ 1200 mm
	at focus point optic: 1 mm @ 62 mm	
Rate of emission:	0.100 ... 1.100, selectable	
Measuring functions:	MAX / MIN / HOLD / DIF / AVG / °C / °F	
Alarm functions:	acoustic / visual high-low-alarm	
Display:	LC Flip with position sensor / bar graph	
Backlight:	green or alarm colours (red / blue)	
Spectral range:	8 ... 14 µm	
Working temperature:	0 ... 50 °C	
Relative humidity:	10 ... 95 %, non condensing	
Data logger:	100 measurements protocols	
Interface:	USB	
Software:	oscilloscopstyle software, 20 readings / s	
Voltage supply:	2 x AA alkaline battery or USB	
Weight:	420 g	
Scope of supply:	Device incl. USB cable & software, bag, insertion probe type K, batteries, carrying loop, calibration protocol, transport case	


Accessories and spare parts:

ISO-WPT

Art. no. 603274

Stativ

Art. no. 603541

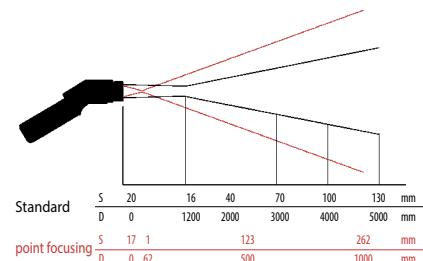

GIM 3590

INFRARED MEASUREMENT IS NOT SUITABLE FOR LIQUIDS AND SPECULAR OR REFLECTIVE SURFACES

HUMIDITY / FLOW RATE

GMH 3330
+ TFS 0100 EGMH 3350
+ TFS 0100 E

GFTH 95



GFTH 200



GFTB 200

APPLICATION:

Air conditioning /
Ambient air monitoring

•

•

•

•

•

Meteorology

•

Room climate

•

•

•

Flow measurement

•

•

Air pressure measuring

•

Calculation of:

Dew point Td

•

•

•

•

Wet bulb temperatur Twb

•

•

Moisture content x /
Absolute humidity d

•

Dew point distance / Enthalpy

•

•

EQUIPMENT:

Plug-in probe

•

•

• (temperature)

Min/Max, Hold, Auto-Off

•

•

•

•

Serial interface

•

•

•

Alarm

•

•

Data logger

•

DEVICE INFORMATION:

Catalogue page

Page 40

Page 40

Page 43

Page 43

Page 42

HUMIDITY, TEMPERATURE AND FLOW RATE MEASURING DEVICE



HIGHLIGHTS:

- Calculation of dew point temperature, dew point distance and enthalpy
- Additional temperature input (type K)

ADDITIONAL FUNCTIONS GMH 3350:



GMH 3330

Art. no. 600343

Climate measuring device, probe not included

GMH 3350

Art. no. 600345

Climate measuring device, probe not included, with data logger

General:

The GMH 33xx devices are universal precision hygrometer / Thermometer and flow meter with additional Thermocouple input in one. The plug-in probes are interchangeable without recalibration, because your calibration data are on an integrated memory stick (TFS ...) or they are interchangeable by the high mechanical precision (STS ...). The thermocouple input T2 is optimized to be able to quickly absorb surface temperatures to e.g. to display the dew point directly.

Application:

- Heating / Ventilation Air Conditioning (HVAC)
- Indoor air, meteorology, laboratory, research and teaching
- Energy assessment / optimization of buildings
- Identify research in structural damage

Specifications:

Measuring range:

Relative humidity:	0.0 ... 100.0 % RH
Ambient temperature:	-40.0 ... +120.0 °C (depending on TFS-probe)
Surface temperature:	-80.0 ... +250.0 °C
Flow rate:	depending on STS probe (p.r.t. next page)
Resolution:	0.1 % RH, 0.1 °C / 0.1 °F, 0.01 m/s

Accuracy (device) (±1 digit)
(at nominal temperature = 25 °C)

Relative humidity:	±0,1 %
Ambient temperature (Pt1000):	±0,2 %
Surface temperature (NiCr-Ni):	0.5 % of m.v. ±0.5 °C
Flow rate:	±0,1 %
Probes: (p.r.t. next page)	No calibration required for exchange of humidity/temperature or flow rate probe.
Probe connection:	6-pin screened Mini-DIN-socket
NiCr-Ni connection:	for miniature flat-pin plug
Display:	two 4½ digit LCDs (12.4 mm or 7 mm high), as well as additional functional arrows.
Working temperature:	-25 ... +50 °C
Relative humidity:	0 ... 95 % RH (non-condensing)
Storage temperature:	-25 ... +70 °C
Pushbuttons:	6 membrane keys

Interface:

serial interface, direct connection to RS232 or USB interface of a PC via electrically isolated interface adapter GRS 3100 or GRS 3105 resp. USB 3100 N (p.r.t. accessories).

Power supply:

9 V battery as well as additional d.c. connector for external 10.5 ... 12 V direct voltage supply. (suitable power supply: GNG10/3000)

Battery life:

approx. 120 h (incl. TFS0100)

Calculation of dew point:

based upon humidity and temperature

Calculation of dew point distance:

by means of a surface measurement

Calculation of enthalpy: thermal content h of the air

Adjustment-function for atmospheric humidity measurements

NiCr-Ni-temperature measuring:

any standard NiCr-Ni-probe (type K) can be plugged in. Recommendation: GOF 400 VE (p.r.t. p. 32). A compensation value can be set for surface measurement if necessary.

Flow measurements:

Two different systems for averaging are integrated:
continuous averaging: the average value displayed is calculated using the last measurements during the averaging time set.
averaging upon request: by starting the current measuring value will be displayed for the averaging time. As soon as the time has expired the average value will be displayed, the device is in HOLD mode.

selectable averaging time:
1 ... 30 s

Logger function (GMH 3350):

manual:
99 data sets (fetch data via buttons or interface)
cyclic:
5.400 data sets (fetch data via interface) adjustable cycle time:
1 s ... 1 h
The logger is started or stopped by keypad or interface. The software GSOF3050 (see accessories) is available for comfortable read-out of logger data.

Housing:

Impact-resistant ABS plastic housing, membrane keyboard, transparent panel, integrated pop-up clip

Dimensions:

142 x 71 x 26 mm (H x W x D)

Weight:

approx. 160 g (incl. battery)

Scope of supply:

Device, battery, manual

Accessories and spare parts:

GNG 10/3000

Art. no. 600273

Plug-in power supply

USB 3100 N

Art. no. 601092

Interface converter, electrically isolated

GSOF 3050

Art. no. 601336

Software for the setting, data read-out and printing of all logger data stored for devices of the GMH3xxx-series with logger function

GAM 3000

Art. no. 601132

Switching module for devices of the GMH3xxx-series incl. alarm output

ST-RN

Art. no. 601074

Device protection bag with cut out for sensor connection

GKK 3500

Art. no. 601052

Big case with cut-outs for GMH3xxx

GKK 3600

Art. no. 601062

case with foam lining for universal use

COMPLETE SOLUTION



GMH 3330-TFS 0100E-WPF4

Art. no. 602682

Complete Solution with humidity-/temperature probe TFS 0100 E and incl. certificate of calibration WPF4 (~20 % / ~40 % / ~60 % / ~80 % RH ascending / descending) and case GKK 3500.

MEASURING PROBES HUMIDITY / TEMPERATURE

**TFS 0100 E**

Art. no. 601488

(0.0 ... 100.0 % RH)

Humidity / temperature probe, exchangeable without any loss in accuracy

General:

Hand sensor for universal application;
cap with integral stainless steel gauze filter for good mechanical protection and despite optimum airflow also for fast measurements in ambient air

Specifications:**Measuring ranges**

Humidity:	0.0 ... 100.0 % RH (rec. range of application: 11 ... 90 % RH)
Temperature:	-40.0 ... +120.0 °C (attention: working temperature of electronics!)

Accuracy (at nominal temperature = 25 °C)

Humidity:	±2.5 % RH (in the range of 10 ... 90 % RH)
Temperature:	±0.5 °C

Sensors

Humidity:	capacitive polymer humidity sensor
Temperature:	Pt1000, DIN cl. AA

Electronics: PC board with amplifier and data memory for sensor data (calibration, etc.) integrated in probe handle.

Working temperature: handle and electronics: -25 ... +60 °C
sensor head and tube: -40 ... +100 °C
(for short time up to +120 °C)

Relative humidity: 0 ... +100 % RH

Dimensions: Probe tube: Ø 14 x 119 mm,
plastic handle: Ø 19 x 135 mm, approx. 1.2 m PVC
connection cable with 6-pin Mini-DIN-plug


Weight: approx. 90 g

Scope of supply: Sensor, Manual

Variant:**TFS 0100 E-POR**

Art. no. 603438

Humidity / temperature sensor with plastic paper filter
for use in dusty environments and also in powder
colors and granulates



MEASURING PROBES SURFACE TEMPERATURE

GOF 400VE

Art. no. 600496

(p.r.t. page 32)

Quick-response surface probes for walls, floors etc.


GTF 300

Art. no. 600072

(p.r.t. page 34)

Quick-response basic thermocouple probe for universal applications
(surface measurement)

MEASURING PROBES FLOW SPEED

**STS 005**

Art. no. 602396

(0.05 ... 5.00 m/s)

Flow measuring probe with snap-on head, exchangeable without any loss in accuracy

Specifications:

Sensor type:	windmill-type anemometer
Measuring range:	0.05 ... 5.00 m/s (water)
Accuracy:	±1 % of range ±3 % of meas. value (at nominal temperature = 25 °C)
Permiss. angle flow:	±20°, without additional measuring faults
Working temperature:	0 ... +70 °C
Relative humidity:	0 ... +100 % RH (non condensing)
Dimensions:	Probe head: Ø 11 x 15 mm, tube: Ø 15 mm, overall length 165 mm, required insertion opening: Ø 16 mm, approx. 5 m PVC connection cable with 6-pin Mini-DIN-plug
Weight:	approx. 75 g
Scope of supply:	Sensor, manual

Accessories and spare parts:**STE 005**

Art. no. 602406

Spare snap-on head for STS 005

STS 005-GTS

Art. no. 602645

GTS Telescopic rod (overall length 1 m)

MEASURING PROBES FLOW / AIR

**STS 020**

Art. no. 602397

(0.55 ... 20.00 m/s)

Flow measuring probe with snap-on head, calibrated and exchangeable.

Specifications:

Sensor type:	windmill-type anemometer
Measuring range:	0.55 ... 20.00 m/s (air)
Accuracy:	±1 % of range ±3 % of meas. value (at nominal temperature) = 25 °C
Permiss. angle flow:	±20°, without additional measuring faults
Working temperature:	-10 ... +80 °C
Relative humidity:	0 ... +100 % RH (non condensing)
Dimensions:	Probe head: Ø 11 x 15 mm, tube: Ø 15 mm, overall length 165 mm, required insertion opening: Ø 16 mm, approx. 5 m PVC connection cable with 6-pin Mini-DIN-plug
Weight:	approx. 75 g
Scope of supply:	Sensor, manual

Accessories and spare parts:**STE 020**

Art. no. 602519

Spare snap-on head for STS 020

**STS 020-GTS**

Art. no. 604217

GTS Telescopic rod (overall length 1 m)



picture shows GTS with assembled STS 020

CLIMATE MEASURING DEVICE – PRECISION HYGRO- / THERMO- / BAROMETER



HIGHLIGHTS:

- alarm function with integrated buzzer
- PC interface
- additional display for further parameters, e.g. dew point temperature and absolute humidity
- precisely detects all environmental conditions in laboratories

GFTB 200

Art. no. 600161

Hygro-/Thermo-/Barometer

General:

The GFTB 200 is designed for measuring air pressure, air humidity and temperature within seconds. It reaches remarkable accuracy because of its high precision sensors. The dew point temperature monitoring with GFTB 200 provides efficient protection from moisture damage potentially caused by condensation water and therefore helps preventing mold infestation. The integrated alarm function can be used to acoustically remind the user to ventilate in order to optimally and efficiently use heating energy. The integrated interface together with the software EBS 20M (optional) allow the use as mobile weather station with additional long-term recording. The GFTB 200 can precisely and clearly display the air condition with parameters like wet bulb temperature, absolute humidity and moisture content of the air.

Application:

mobile weather station, housing space, indoor swimming pools, offices and production rooms, laboratories, storage rooms, museums, gallery, churches, cooling and climate technology, construction, building physics, loss assessment

Specifications:

Measuring ranges

Temperature:	-25.0 °C ... +70.0 °C
Air humidity:	0.0 ... 100.0 % RH (recommended range: 11 ... 90 % RH)
Air pressure:	10.0 ... 1100.0 mbar

Calculated parameters

Dew point temperature Td: -40.0 ... +70.0 °C

Wet bulb temperature Twb: -27.0 ... +70.0 °C

Mixing ratio x: 0.0 ... 280.0 g/kg

Absolute humidity d: 0.0 ... 200.0 g/m³

Resolution: 0.1 % RH; 0.1 °C or 0.1 °F, 0.1 mbar

Accuracy: (±1 digit) (at nominal temperature = 25 °C)

Temperature: ±0.5 % v. MW. ±0.1 °C (Pt1000 DIN cl. AA)

Air humidity: ±2.5 % RH (at range 11 ... 90 %)

Air pressure: ±1.5 mbar (750 ... 1100 mbar)

Messfühler

Temperature: Pt1000

Air humidity: capacitive polymer humidity sensor

Air pressure: piezo-resistive sensor hybrid

Response time: T₉₀ = 10 s

Display: 4½-digit, approx. 11 mm high LCD-display with additional displays

Pushbuttons: 3 keys for ON/OFF, min/max value display, hold

Nominal temperature: 25 °C

Working conditions

Electronics: -25 ... +70 °C; 0 ... 80 % RH (non condensing)

Sensors: -25 ... +70 °C; 0 ... 100 % RH

Power supply: 9 V battery

Battery life: approx. 400 d at 1 measuring / 60 s (mode SLOW)
approx. 180 d at 1 measuring / s (mode FAST)

Interface: Serial interface, via electrical isolated interface converter USB 3100 N (accessories) directly connectable to PC.

Configurable display: choice between automatically displaying all values rotationally (cycle of 2 or 4 s) or manual selection, units not needed can be excluded

Offset and Scale: digital offset- and scale adjustment of measurements

Tendency indicator: Air pressure rising/falling (for barometer)

Sea level correction: Barometric values can be converted to sea level (therefore the input of the current altitude is needed).

Housing: made of impact-resistant ABS

Dimensions: approx. 106 x 67 x 30 mm (H x W x D), additionally the sensor head at the front side, 35 mm long, Ø 14 mm; resulting total length 141 mm

Weight: approx. 130 g incl. battery

Scope of supply: Device, battery, calibration protocol, manual

Variant:

GFTB 200-KIT

Art. no. 600890

Hygro-/Thermo-/Barometer with USB-interface kit, consisting of:

- USB interface converter USB 3100 N
- multi channel software EBS20M (to record all device units)

Accessories and spare parts:

GKK 252

Art. no. 601056

Case (235 x 185 x 48 mm) with foam lining

ISO-WPF4

Art. no. 602543

Certificate of calibration, humidity, for ISO9000ff (p.r.t. page 15)

ISO-WPD5

Art. no. 602514

Certificate of calibration, pressure, for ISO9000ff (p.r.t. page 15)



HIGHLIGHTS:

- easy and fast search for thermal bridges
- targeting laser for precise location even of inaccessible areas
- audible alarm below dewpoint

GFTB 200 SET

Art. no. 600163

Measurement set GFTB200 incl. infrared thermometer GIM 530 MS and case GKK 3600

General:

The additional infrared thermometer contained in the GFTB 200 SET makes it easy to check mould-problem areas on walls etc. The wall can easily be scanned by means of the laser beam within very short time. When wall temperature falls below the critical dewpoint (this is, when the wall gets wet), the device alerts with an audible signal.

Note: for technical data for the infrared thermometer GIM530MS please refer to catalog page 37.

HUMIDITY/TEMPERATURE MEASURING DEVICE

**GFTH 95**

Art. no. 600245

Hygro-/Thermometer

Application:

Quick-response humidity and temperature measurements in EDP rooms, museums, galleries, churches, office complexes, workshops, storage rooms, swimming-baths, private buildings, greenhouses, for refrigeration engineering, air conditioning, for building sites/technology, for inspectors or rendering of expert opinions etc.

Specifications:**Measuring range**

°C: -20.0 ... +70.0 °C

% RH: 10 ... 95 % RH (recommended range: 30 ... 80 %)

Resolution: 0.1 °C or 0.1 % RH

Accuracy: (±1 digit) (at nominal temperature = 25 °C)

Temperature: ±0.5 % of m.v. ±0.1 °C

Humidity: ±3 % RH (for range 30 ... 80 %)

Measuring probe

Temperature: Pt 1000

Humidity: capacitive polymer humidity sensor

Response time: $T_{90} = 15$ s

Display: 3½-digit, 13 mm high LCD-display

Pushbuttons: slide switch for selection of measuring range

Nominal temperature: 25 °C

Operating conditions

Electronic: -20 ... +70 °C; 0 ... 80 % RH (non-condensing)

Sensors: -20 ... 70 °C; 0 ... 100 % RH

Power supply: 9 V battery

Battery life: approx. 3000 h

Housing: impact resistant ABS-housing

Dimensions: approx. 106 x 67 x 30 mm (H x W x D), plus sensor head protruding at the longer side 35 mm long and 14 mm Ø, overall length 141 mm.

Weight: approx. 135 g incl. battery

Scope of supply: Device, battery, manual

Accessories and spare parts:**GB 9 V**Art. no. 601115
spare battery**GKK 252**Art. no. 601056
case (235 x 185 x 48 mm) with foam lining**ISO-WPF4**Art. no. 602543
Certificate of calibration for ISO9000ff (p.r.t. page 15)

HUMIDITY / TEMPERATURE / DEW POINT MEASURING DEVICE

**GFTH 200**

Art. no. 600249

Hygro-/Thermometer

General:

Because of the low power consumption and the integrated min-/max-value memory the GFTH 200 is perfectly suitable for long term climate surveillances.

Specifications:**Measuring range**

Temperature: -25.0 ... +70.0 °C; -13.0 ... +158.0 °F

% RH: 0.0 ... 100.0 % RH (recommended range: 11 ... 90 % RH)

Td (Dewpoint): -40.0 ... +70.0 °C or
-40.0 ... +158.0 °F

Resolution: 0.1 % RH, 0.1 °C or 0.1 °F

Accuracy: (±1 digit) (at nominal temperature = 25 °C)

Temperature (internal): ±0.5 % of m.v. ±0.1 °C

Temperature (external): 0.1 °C (device) + probe accuracy

Humidity: ±2.5 % RH (for range 11 ... 90 %)

Measuring probe

Temperature: Pt 1000

Humidity: capacitive polymer humidity sensor

Response time: $T_{90} = 10$ s

Terminal for external probe: for connection of any Pt1000-probes with 3.5 mm mono plug (for suitable probes p.r.t. page 21-23)

Display: 3½-digit, 13 mm high LCD-display

Pushbuttons: 3 keys for On/Off, min-/max-value display and hold. Slide switch for selection of measuring range.

Nominal temperature: 25 °C

Operating conditions

Electronic: -25 ... +70 °C; 0 ... 80 % RH (non-condensing)

Sensors: -25 ... +70 °C; 0 ... 100 % RH

Power supply: 9 V battery

Battery life: >2 years at 1 measuring / 60 s
approx. 120 days at 1 measuring / s (mode FAST)

Housing: impact resistant ABS-housing

Dimensions: approx. 106 x 67 x 30 mm (H x W x D), plus sensor head protruding at the longer side 35 mm long and 14 mm Ø, overall length 141 mm.

Weight: approx. 135 g incl. battery

Scope of supply: Device, battery, manual

HIGHLIGHTS:

- External Pt1000 temperature probe connectable
- Relative humidity, temperature and dew point in just one instrument

Accessories and spare parts:**GOF 175 Mini**

Art. no. 600436

temperature probe for surface temperature measuring (p.r.t. page 22)

further temperature probe

refer to page 21

GKK 252

Art. no. 601056

Case (235 x 185 x 48 mm) with foam lining

ISO-WPF4

Art. no. 602543

ISO Certificate of calibration for ISO9000ff (p.r.t. page 15)

COMPLETE SOLUTION**GFTH 200-WPF4**

Art. no. 602678

Complete solution incl. certificate of calibration ISO-WPF4 (~20 % / ~40 % / ~60 % / ~80 % RH increasing and decreasing) and case GKK 252.

EASY SEARCH FOR
THERMAL BRIDGES**GFTH 200 SET**

Art. no. 600285

Measuring set incl. infrared thermometer GIM 530 MS and case GKK 3600

General:

The additional infrared thermometer contained in the GFTH 200 SET makes it easy to check mould-problem areas on walls etc. The wall can easily be scanned by means of the laser beam within very short time. When wall temperature falls below the critical dewpoint (this is, when the wall gets wet), the device alerts with an audible signal.

Advantages GFTH 200 SET:

- targeting laser for precise location even of inaccessible areas
- audible alarm below dewpoint
- fast evaluation of mould-problem areas

Scope of supply: GFTH 200, GIM 530 MS, battery, GKK 3600, manual

GIM 530 MS:

for technical data for this instrument please refer to page 37.

MATERIAL MOISTURE



APPLICATION:

Carpenter, joiners, DIY

Boat & Caravan (wood & GFK)

Certified glue lam

Foelwood, wooden log

Wood chips

Plaster, screed, concrete, bricks,
lime mortarsConstruction-damage assess-
ment / Water damage restorationHay bale / bale of straw/
Corn (barley, wheat)

EQUIPMENT:

Method

capacitive (non-destructive)

resistive (resistance)

Sensor / Probe

integrated

integrated

external

external
GSF 40external
GSF 40TF

Characteristics

14

18

4

494

4

494

User curves

4

General functions

Hold,
Auto-OffHold,
Auto-OffHold,
Auto-OffHold, Auto-
Off, SortHold, Auto-
Off, SortHold, Auto-
Off, SortHold,
Auto-OffHold, Auto-
Off, Sort

Serial interface / Analog output

• / 0 ... 1 V

• / 0 ... 1 V

• / 0 ... 1 V

Data logger

•

DEVICE INFORMATION:

Catalogue page

Page 46

Page 46

Page 45

Page 50

Page 50

Page 47

Page 47

Page 51

Page 51



Material Moisture Measurement with GREISINGER handheld instruments

METHODS

Resistive measuring method

(GMR 110, GMH 3810, GMH 3831, GMH 3851)

The electrical resistance often depends on the material moisture. Therefore the devices measure the (possibly extremely high) values of resistance and convert them to the displayed value by means of integrated characteristic curves. The temperature has to be compensated especially at the measurement of wood – all GREISINGER-instruments have an integrated temperature compensation. In most cases the contact is realised by nails that are driven into the material are used to contact.

Capacitive measuring method

(GMK 210, GMK 100, GMI 15)

The dielectric properties of an object are often a good indicator for its material moisture. The dielectric coefficient of water is considerably higher than that of dry lumbars or building materials. Therefore the total dielectric coefficient of the measuring object can be easily used to get its material moisture. For the measurement the device has to be applied on the material. Precondition therefore: planar surfaces, no metallic elements.

Relative humidity

(i.e. GMH 3330 + TFS 0100 E)

Another method is to measure the material moisture indirectly by means of the relative humidity: The humidity in a sealed hole within a material depends on the material moisture. By means of a so-called sorption isotherm or a corresponding table the material moisture can be calculated from the humidity.

Dry method

The oven dry method can be used for reference point measurement with highest accuracy. The moist material is weighed and afterwards dried at increased temperature until no weight loss is detectable anymore. The material moisture can be calculated from the moist and arid weight.

UNITS

Material moisture u (also „atro“):

relating to dry mass
material moisture u [%] =
 $(\text{mass wet} - \text{mass dry}) / \text{mass dry} * 100$
Particularly important for carpenters, joiners, etc.

Moisture content w :

material moisture related to wet total mass
moisture content w [%] =
 $(\text{mass wet} - \text{mass dry}) / \text{mass wet} * 100$
Particularly important for the evaluation of combustibles.

„Digit“ (GMI 15)

The displayed value is relative, that means without a physical unit. This can be used to get comparative moisture information of the same materials. Lower values indicate less moisture, higher values indicate therefore more moisture.

For further information on this topic please see the devices' manuals and our homepage www.greisinger.de

INDICATOR FOR MOISTURE IN WOOD AND BUILDINGS



HIGHLIGHTS:

- nondestructive measurement
- easy and fast moisture rating

GMI 15

Art. no. 600059

Indicator for moisture in wood and buildings

General:

Device for high-speed determination of moisture in buildings, contracting work etc. The GMI 15 allows detection of moisture in wood down to a depth of approx. 3 cm and in concrete or wash floor down to a depth of approx. 4 cm. Detection of moisture behind ceramic tiles and/or various wall or floor coverings. To check moisture simply place device on the surface to be measured - no injection into the measuring object required. The displayed values by „digit“ are relative, that means the values can be well compared.

Application:

Humidity indication for i.e. estate agents (for fast control state of buildings), property management, house owners, architects, building experts, building contractors, etc.

Note:

The GMI 15 is an indicator for the fast estimation - it does not replace precision instruments like the GMH 3810, GMH 3831, GMH 3851 or GMK 100

Specifications:

Display:	3½-digits, 13 mm high LCD
Display range	
Concrete / floor pavement:	0 ... 5 = dry 6 ... 9 = humid, normal humidity level 10 ... = wet
Wood / fibre glass reinforced polyester:	0 ... 3 ~ 0 ... 12 % : dry 3 ... 6 ~ 12 ... 20 % : air-dry 6 ... 11 ~ 20 ... 30 % : wind-dry 11 ... ~ 30 % ... : wet
Power supply:	9 V battery
Battery life:	approx. 60 h
Working temperature:	0 ... 50 °C (material not frozen)
Storage temperature:	-20 ... +70 °C
Relative humidity:	0 ... 80 % RH (non-condensing)
Housing:	Impact resistant ABS plastic housing
Dimensions:	approx. 106 x 67 x 30 mm (H x W x D)
Weight:	approx. 150 g (ready for use)
Scope of supply:	Device, battery, manual

MEASURING DEVICE MOISTURE



HIGHLIGHTS:

- Moisture display in percent
- Acoustical and visual moisture rating
- 18 material characteristics for wood and building materials
- 2 different measurement depth
- For wood and building moisture


GMK 100

Art. no. 600105
Measuring device moisture in wood and buildings

General:	
The GMK 100 is a capacitive material moisture measuring device with direct moisture display in percent. It is optimally suited for home and handcraft. Depending on the application, it is possible to display the material moisture “u” or the water content “w”. The humidity is measured by a measuring plate on the back of the device. With a side-mounted switch the measuring depths can be changed. With the help of measurements in different depth a statement could be made if for example the material dries already or if the moisture is just on the surface of the material.	
Application:	
Humidity measurement and indication of wood, concrete, screed, plaster, etc.	
Specifications:	
Display:	2 displays for material and measured value, in % material moisture or in % moisture content, backlight
Moisture rating	
Visual:	Rating of the moisture in 6 levels from WET to DRY
Acoustic:	Signal tone
Measurement depths:	10 mm and 25 mm
Curves:	18 characteristic curves for wood (with assignment tabel for wood species) and popular materials, additionally reference curve (rEF) for high-resolution relative measurements
Working temperature:	-5 ... +50 °C (not frozen)
Storage temperature:	-25 ... +70 °C
Power supply:	9 V battery
Battery life:	max. 2000 h without backlight
Power backlight:	approx. 2.5 mA (Auto-Off)
Housing:	impact-resistant ABS plastic housing, plastic foil keyboard, clear screen
Dimensions:	approx. 106 x 67 x 30 mm (H x W x D)
Weight:	approx. 145 g (ready for use)
Scope of supply:	Device, battery, calibration protocol, manual

Accessories and spare parts:	
PW 25	Art. no. 601368
Testing probe to control the device	

MEASURING DEVICE MOISTURE

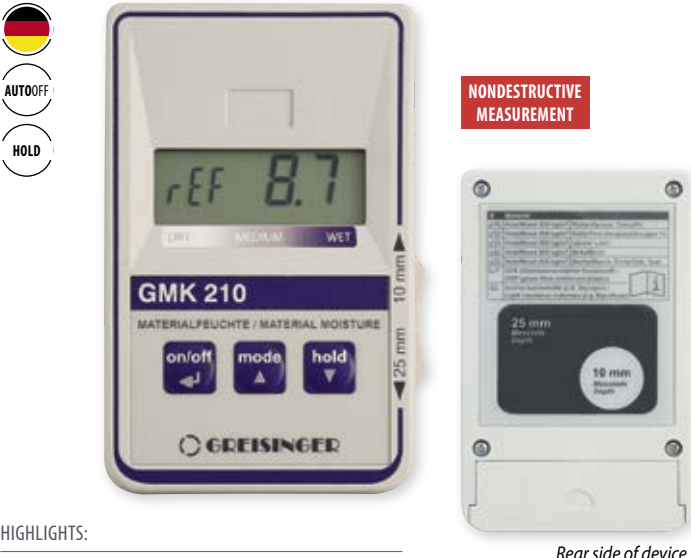

HIGHLIGHTS:

- Moisture display in percent
- Acoustical and visual moisture rating
- 14 material characteristics for wood and GFK
- 2 different measurement depth for Caravan & Boat
- Search mode for quickly locating humidity and the like

GMK 210

Art. no. 600107
Material moisture measuring device for caravan and boat

General:	
The GMK 210 is a capacitive material moisture measuring device with direct moisture display in percent. It is optimally suited for home and handcraft. Depending on the application, it is possible to display the material moisture “u” or the water content “w”. The humidity is measured by a measuring plate on the back of the device. With a side-mounted switch the measuring depth can be changed. With the help of measurements in different depth a statement could be made if for example the material dries already or if the moisture is just on the surface of the material.	
Application:	
Humidity measurement and indication of wood and GFK (glass fiber reinforced plastic)	
Specifications:	
Display:	2 displays for material and measured value, in % material moisture or in % moisture content, backlight
Moisture rating	
Visual:	Rating of the moisture in 6 levels from WET to DRY
Acoustic:	Signal tone
Measurement depths:	10 mm and 25 mm
Curves:	14 characteristic curves for wood (with assignment tabel for wood species) and GFK, insulating materials i.e. Styropor; additionally reference curve for high-resolution relative measurements
Working temperature:	-5 ... +50 °C (not frozen)
Storage temperature:	-25 ... +70 °C
Power supply:	9 V battery
Battery life:	max. 2000 h without backlight
Power backlight:	approx. 2.5 mA (Auto-Off)
Housing:	impact-resistant ABS plastic housing, plastic foil keyboard, clear screen
Dimensions:	approx. 106 x 67 x 30 mm (H x W x D)
Weight:	approx. 145 g (ready for use)
Scope of supply:	Device, battery, calibration protocol, manual

Accessories and spare parts:	
PW 25	Art. no. 601368
Testing probe to control the device	

PRECISION MATERIAL MOISTURE MEASURING DEVICE FOR WOOD, BUILDING MATERIALS, STRAW, HAY, PAPER, TEXTILES, ETC.



466 WOOD TYPE CHARACTERISTICS
28 CONSTRUCTION MATERIALS

HIGHLIGHTS:

- serial interface or analog output 0 ... 1 V, freely scalable
- 4 programmable characteristics (GMH 3851)
- incl. calibration protocol

ADDITIONAL FUNCTIONS GMH 3851:



Conform to
EN 14080 : 2013 EN 16351 : 2015
Suitable e.g. for glued timber construction and
laminated timber (MPA certified and listed)

GMH 3831

Art. no. 609289

Resistive material moisture and temperature measuring device, w/o accessories

GMH 3851

Art. no. 602009

Resistive material moisture and temperature measuring device, w/o accessories,
with data logger and programmable characteristic curves memory

General:

The GMH 3831 and GMH 3851 offer decisive advantages in handling, user-friendliness, functional range and accuracy. The absolute moisture of 494 material types is displayed directly and can be automatically converted to water content. The cumbersome usage of calculation tables becomes a thing of the past. Additionally you get a moisture rating (wet ... dry) of the measured material.

Application:

Precision measurements in cut-wood, chip board, veneer, sawdust, wood chips, wood wool, flax, straw, hay, concrete, bricks, wash floor, plaster, limestone mortar, cement mortar, paper, carton, textiles, wood chips, professional firewood humidity measurement, etc.

User:

architect, expert, inspector, building contractor, painter, carpenter, parquet joiner, floor tiler, wood works, timber desiccation plant, building repair company, textile industry etc.

Specifications:

Measuring principle

Moisture: Resistive material moisture measurement acc. to DIN EN 13183-2:2002

Temperature

external: thermocouple, NiCr-Ni (type K)

internal: NTC

Characteristic curves: 494 material characteristics

Measuring range:

Moisture: 0.0 ... 100 % u (material moisture)
0.0 ... 50 % w (water content, wet basis)
(depends on selected characteristic)

Temperature: -40.0 ... +200.0 °C (-40.0 ... +392.0 °F)

Moisture rating: 9 steps (dry ... wet)

Resolution: 0.1 % or 0.1 °C (0.1 °F)

Device accuracy: (at nominal temperature)

Wood: ±0.2 % material moisture (deviation from corresponding characteristic curve in range 6 ... 30 %)

Building material: ±0.2 % material moisture
(deviation from corresponding characteristic curve)

Temperature: (external) ± 0.2 % of m.v. ± 0.3 °C

Temperature compensation: automatic or manual

Sensor connection:

Moisture: BNC

Temperature: thermovoltage-free type K (NiCr-Ni) socket

Permitted working temperature: -5 ... +50 °C (not frozen)

Display:	two 4-digit LCD displays (12.4 mm and 7 mm high), additional indicator arrows
Output:	3-pole jack connector Ø 3.5 mm, either with serial interface or analog output
Serial interface:	connectable to RS232 or USB interface of PCs via electrically isolated interface converter GRS 3100, GRS 3105 or USB 3100 N (accessories).
Analog output:	0 ... 1 V, freely scalable
Average value:	of 3 measurements, e.g. for professional firewood moisture measurements
Power supply:	9 V battery, additional socket for external 10.5 ... 12 V direct current power supply (adequate PSU: GNG10/3000).
Battery life:	approx. 120 h
Housing:	Impact-resistant ABS plastic housing, membrane keyboard, transparent panel, integrated pop-up clip
Dimensions:	142 x 71 x 26 mm (H x W x D)
Weight:	155 g
Scope of supply:	Device, battery, calibration protocol, manual

additional functions GMH 3851:

User specific characteristics: 4, freely programmable

Interpolation points per curve: 20

By means of the gratis software GMHKonfig the interpolation points can be comfortably edited and stored to the instrument (Required accessories: interface converter)

Sort limitation of different materials (up to 8)

Data logger:

This instrument is essential for the documentation of material state by quality assurance systems, etc. By means of the integrated data logger there can be up to 10.000 measuring values recorded and processed on demand. Additionally it is possible to individually program 4 material curves (e.g. with dry oven or CM-method). This instruments finally makes paper correction tables unnecessary.

Logger function

- manual:

99 data sets (fetch data via buttons or interface)

- cyclic:

10.000 data sets (fetch data via interface)

adjustable cycle time: 1 s ... 1 h

The logger is started or stopped by keypad or interface. The software GSOF3050 (see accessories) is available for comfortable read-out of logger data.

Accessories and spare parts:

GSOF3050

Art. no. 601336

Logger operation software

GRS 3100

Art. no. 601097

RS232 interface converter

USB 3100 N

Art. no. 601092

Interface converter

additional accessories: see next page

OPTIONAL ACCESSORIES

1

**GMK 38**

Art. no. 601261

Connection cable

BNC to 2 x banana plug, approx. 90 cm long

2

**GHE 91**

Art. no. 601263

Reciprocating piston electrode *

to drive measuring nails into material without auxiliary devices

3

**GSE 91**

Art. no. 601266

Impact electrode *

to drive measuring nails into material

4

**GEG 91**

Art. no. 601268

Handle

suitable for GSE 91

5

**GSG 91**

Art. no. 601270

Penetration electrode *

adequate for steel nails and measuring rods

6

**GST 91**

Art. no. 601273

Steel nails

9 steel nails (3 pieces each, 12, 16 and 23 mm long) in plastic case, Ø 2.5 mm

GST 91/40

Art. no. 601275

Steel nails

10 steel nails, 40 mm long, Ø 2.5 mm, in plastic case

7

**GST 45i**

Art. no. 601277

Steel nails

2 Teflon isolated steel nails, 45 mm long, Ø 2.5 mm

GST 60i

Art. no. 601279

Steel nails, as above, 60 mm long

8

**GOK 91**

Art. no. 601287

Measuring cap

Surface measuring caps (pair) (for use with GSG 91 or GSE 91)

9

**GMS 300/91**

Art. no. 601289

Measuring rods

300 mm long (pair), for wood chips, wood wool, paper, carton, etc. (for use with GSG 91 or GSE 91)

10

**GST 15B**

Art. no. 601281

steel nails *

2 steel nails with bore hole, 15 mm long, Ø 3.8 mm (for direct connection of measuring cable GMK 38)

GST 25B

Art. no. 601283

steel nails * as above, Ø 3.8 x 25 mm**GST 40B**

Art. no. 601285

steel nails * as above, Ø 3.8 x 40 mm

11

**GBSK 91**

Art. no. 601293

Wire brush (pair) short *

for depths up to approx. 100 mm

12

**GBSL 91**

Art. no. 601294

Wire brush (pair) long *

for depths up to approx. 300 mm

13

**GEF 38**

Art. no. 601296

Flat electrode (pair) *

for screed, paper, etc.

14

**GLP 91**

Art. no. 601299

Conducting paste

100 ml, for surface measurements and depth indication in walls, wash floors etc. with brush probes

15

**GSP 91**

Art. no. 601301

Sensor for surface measurements *

on paper, textiles etc.

GSP 91 ES

Art. no. 601303

Spare sensor element

for GSP 91

16

**GMZ 38**

Art. no. 605783

Measuring clamp *

for measurements of veneers or thin wood (up to approx. 10 mm)

17

**GSF 50 (110 cm)**

Art. no. 601306

GSF 50K (43 cm)

Art. no. 601308

Injection probe

(without temperature sensor) for measurement up to a depth of 40 cm or 107 cm, incl. 1 m connection cable. Suitable for: wood chips, wood wool, straw, hay, grain, saw dust, etc.

18

**GSF 50TF (110 cm)**

Art. no. 601312

GSF 50TFK (43 cm)

Art. no. 601314

Injection probe

(with temperature sensor) for measurement up to a depth of 40 cm or 107 cm, incl. 1 m connection cable. Suitable for: wood chips, wood wool, straw, hay, grain, saw dust, etc.

* Measuring cable GMK 38 necessary for GHE 91, GSE 91, GSG 91, GST 15B / 25B / 40B, GBSK 91, GBSL 91, GEF 38, GSP 91, GMZ 38

OPTIONAL ACCESSORIES

19

**GSF 40 (67 cm)**

Art. no. 601316

Injection probe

(without temperature sensor) for measurement of pressed bales up to a depth of 60 cm, incl. 1 m connection cable. Suitable for: pressed hay or straw bales, grain

20

**GSF 40TF (67 cm)**

Art. no. 601319

Injection probe

(with temperature sensor) for measurement of pressed bales up to a depth of 60 cm, incl. 1 m connection cable. Suitable for: pressed hay or straw bales, grain

21

**GTF 38**

Art. no. 601347

NiCr-Ni temperature probe

potential free, Ø 2.2 x 25 mm, 1 m cable (recommended for wood moisture measurements)

22

**GES 38**

Art. no. 601350

NiCr-Ni injection probe

potential free, Ø 4 x 150 mm, 1 m cable (recommended for wood moisture measurements)

23

**GPAD 38**

Art. no. 601328

Test adapter

(with 2 reference values) for testing GMH 38xx and GMR 110

24

**GKK 3500**

Art. no. 601052

Plastic case

(394 x 294 x 106 mm) with cut-outs for device and accessories (device and accessories are not included)

25



pict.: GMH3831
in ST-RN

ST-RN

Art. no. 601074

Protection bag

with blanked out sensor connections (suitable for GMH 3831, GMH 3851)

ACCESSORIES-SETS



SET WITHOUT DEVICE

SET 38 HF

Art. no. 602071

Wood moisture set

Content:

- GKK 3500 (case)
- GMK 38 (measuring cable)
- GSE 91 (impact electrode)
- GST 91 (measuring nails)
- GTF 38 (temperature probe)

Application:

Holz



SET WITHOUT DEVICE

SET 38 BF

Art. no. 602073

Wood and building moisture set

Content:

- GKK 3500 (case)
- GMK 38 (measuring cable)
- GSE 91 (impact electrode)
- GST 91 (measuring nails)
- GTF 38 (temperature probe)
- GMS 300/91 (measuring rods)
- GBSK 91 (wire brush)
- GLP 91 (conductive paste)

Application:

wood, concrete, screed, plaster



SET WITHOUT DEVICE

SET 38 MPA

Art. no. 602075

MPA wood moisture set

Content:

- GKK 3500 (case)
- GMK 38 (measuring cable)
- GHE 91 (reciprocating piston electrode)
- GST 91 (measuring nails)
- GTF 38 (temperature probe)

Application:

wood, gluelam, production of laminated timber

MOISTURE COMPLET SET

**GMH 38-LW1-TF**

Art. no. 606470

GMH 38-LW1-TFK

Art. no. 606462

GMH 38-LW2-TF

Art. no. 606471

GMH 38-LW2-TFK

Art. no. 606463

Moister complete set for for agricultural use.

General:

Measuring device for fast moisture analysis in lumps and bulks. Universally applicable tool damage prevention and quality assurance. The more than 1 m long insertion probe with integrated temperature sensor is very good for measuring in hay and straw lump and bulk suitable. Material humidity and temperature can be easily determined by piercing the object.

Application:

- Hay, flax
- Straw, cereals
- Wood chips
- Wheat
- Barley

the simple humidity indication is done in nine steps.

Specifications:

Device:	GMH 3831 or GMH 3851, see page 47
Penetration:	GSF 50, GSF 50K, GSF 50TF, GSF 50TFK, see page 48

Scope of supply

GMH 38-LW1-TF:	GMH 3831, GSF 50 TF, battery, manual
GMH 38-LW1-TFK:	GMH 3831, GSF 50 TFK, battery, manual
GMH 38-LW2-TF:	GMH 3851, GSF 50 TF, battery, manual
GMH 38-LW2-TFK:	GMH 3851, GSF 50 TFK, battery, manual

RESISTIVE MATERIAL-MOISTURE MEASURING DEVICE



HIGHLIGHTS:

- 494 characteristic curves
- incl. calibration protocol

FOR WOOD AND BUILDING MATERIALS

GMH 3810

Art. no. 600350

Resistive material-moisture measuring device with integrated measuring pins

General:

The measuring pins integrated on the reinforced front numerous measurements can be done without additional accessories. For measuring of very hard materials we suggest the components shown at the accessories section.

Specifications:

Measuring principle

Moisture: resistive material-moisture-measuring according to DIN EN 13183-2:2002

Temperature internal: NTC

Curves: 494 material characteristics

Measuring range

Moisture: 0.0 ... 100.0 % moisture content
0.0 ... 50.0 % water content
(depending on characteristic curve)

Temperature: -25.0 ... +50.0 °C (-13.0 ... +122.0 °F)

Estimation: in 9 steps (dry ... wet)

Resolution: 0.1 % or 0.1 °C (0.1 °F)

Accuracy device: (at nominal temperature = 25 °C)

wood: ±0.2 % moisture content
(deviation from characteristic curve at range 6 ... 30 %)

building material: ±0.2 % moisture content (deviation from characteristic curve)

Temperature compensation: automatically or manual

Measuring probe: 2 pin holders M6 x 0.75 with 19 mm pins (12 mm utilisable)

Perm. working temperature -5 ... +50 °C (not frozen)

Storage temperature: -25 ... +70 °C

Relative humidity: 0 ... 95 % RH (non condensing)

Display: two 4-digit LCDs

Sort: the material selection is restricted to up to 8 favorites

Power supply: 9 V battery

Battery life: approx. 120 h

Housing: Impact-resistant ABS plastic housing, membrane keyboard, transparent panel, integrated pop-up clip

Dimensions: 142 x 71 x 26 mm (H x W x D)

Weight: 175 g

Scope of supply: Device, battery, calibration protocol, manual

Accessories and spare parts:

GST 3810

Art. no. 601392
replacement pins (10 pcs.)

GMK 3810

Art. no. 603070
1 m connection cable with 2 x banana plugs and 2 adapters. Allows connection of accessories (except GSF38..., GTF38 and GES38) on GMH3810 / GMR110.

RESISTIVE MATERIAL-MOISTURE MEASURING DEVICE



AUTOMATIC TEMPERATURE COMPENSATION



rear side of device

COMFORTABLE CHARACTERISTIC CURVE- AND RATED DISPLAY

GMR 110

Art. no. 600101

Resistive material moisture measuring device with integrated measuring needles.

General:

Compact and robust measuring device for fast evaluation of material moisture in firewood, timber, flake board, inlay, plaster, cement and lots more. A suitable characteristic is selected with help of material table on the rear side of the device before measuring. The material is contacted by pressing the measuring needles into it. The measured value is displayed only a short time afterwards. The device is especially designed for precise firewood and timber measurements, however, a lot of additional building materials can be rated.

- Material tables on rear side of device
- Integrated, exchangeable measuring needles
- Moisture rating (wet/dry) via bar graph
- Display of material moisture or water content
- Integrated temperature compensation
- Characteristic curve display

Specifications:

Measuring principle: resistive material moisture measurement acc. to DIN EN 13183

Characteristic curves: 3 different wood groups (h.01, h.02, h.03) for a total of 130 wood types and 8 different building material curves (c.01, c.02, c.03, c.04, c.05, c.06, c.07, c.08)

Measuring range: 0.0 ... 100 % material moisture (depends on selected characteristics)

Moisture rating: in 6 steps (wet ... dry)

Resolution: 0.1 % (<20 %), 1 % (>20 %)

Accuracy: (at nominal temperature = 25 °C)

Wood: ±0.2 % material moisture (Deviation to wood characteristic curve in range 6 ... 20 %)

Building materials: ±0.2 % material moisture (Deviation to corresponding characteristic curve)

Temperature compensation: automatically or manual

Measuring probe: 2 needle holder M6 x 0.75 with 19 mm measuring needles (12 mm usable length)

Perm. working temperature: -5 ... +50 °C (not frozen)

Storage temperature: -25 ... +70 °C

Relative humidity: 0 ... 95 % RH (non condensing)

Display: 2 LCD displays for characteristic and measuring value

Power supply: 9 V battery

Battery life: approx. 170 h

Housing:

Impact-resistant ABS plastic housing, membrane keyboard, transparent panel

Dimensions:

110 x 67 x 30 mm + needles 26 mm

Weight:

approx. 155 g

Scope of supply:

device, 2 needle protection caps, battery, calibration protocol, manual

Characteristic curves:

3 wood groups:

- h.01 spruce, pine
- h.02 maple, birch, beech, larch (EUR), ash (EUR), fir
- h.03 oak, ash (AM), poplar, douglas fir

a lot of additional wood types can be determined with the table of the instruction manual

8 building material curves:

- c.01 cement screed, concrete
- c.02 anhydrite screed
- c.03 plaster, lime mortar
- c.04 cement mortar
- c.05 gas concrete
- c.06 lime sand brick
- c.07 clay brick
- c.08 gypsum plaster

Accessories and spare parts:

GST 3810

Art. no. 601392
replacement pins (10 pcs.)

GMK 3810

Art. no. 603070
1 m connection cable with 2 x banana plugs and 2 adapters. Allows connection of accessories (except GSF38..., GTF38 and GES38) on GMH3810 / GMR110.



additional special accessories at page 48.

GB 9 V

Art. no. 601115
Spare battery

GKK 252

Art. no. 601056
Case (235 x 185 x 48 mm) with foam lining

HAY AND STRAW HUMIDITY MEASURING DEVICE



- HIGHLIGHTS:**
- robust 60 cm V4A measuring rod
 - characteristics for hay, straw and grain

BaleCheck 100

Art. no. 600103

Hay and straw humidity measuring device (incl. measuring rod and protective bag)

General:

The BaleCheck 100 is a professional measuring device for measuring the moisture in bales of pressed hay and straw. It allows to easily determine the suitability for storage and quality of hay and straw – important especially in agriculture, stock breeding and horse keeping. The slim but robust measuring rod should be used for measurements in different depths. If the maximal moisture is <16.0 % u, the material can be stored or spent without hesitation.

Application:

- agriculture
- processing or storing of hay or straw
- hay and straw trading
- stock breeding
- horse keeping

Specifications:

Measuring range:	0.0 ... 100 % u (material moisture) 0.0 ... 50 % w (water content)
Resolution:	0.1 % (till 19.9 %) and 1 % (from 20 %)
Characteristics:	hay, straw, grain, reference characteristics
Moisture rating:	6-step bar graph (wet ... dry)
Temperature compensation:	manual
Display:	2 displays for characteristics and measuring value
Operating conditions:	-25 ... +50 °C (device), 0 ... +100 °C (rod), 0 ... 95 % RH (non condensing)
Measuring rod:	V4A stainless steel, 600 mm x Ø 10 mm, 1 m connection cable with BNC-plug, 260 g, design of probe handle offers comfortable operation
Power supply:	9 V battery
Battery life:	approx. 170 h
Housing:	impact-resistant ABS
Dimensions:	110 x 67 x 30 mm (H x W x D)
Weight:	155 g
Scope of supply:	Device, measuring rod GSF 40, protective bag, battery, calibration protocol, manual

HAY AND STRAW HUMIDITY MEASURING DEVICE
INCL. TEMPERATURE MEASUREMENT

- HIGHLIGHTS:**
- fast temperature measurement integrated
 - robust 60 cm V4A measuring rod
 - characteristics for hay, straw and grain

BaleCheck 200

Art. no. 600354

Hay and straw humidity measuring device incl. temperature measurement, measuring rod 620 mm

General:

The BaleCheck 200 is a professional measuring device for measuring the moisture in bales of pressed hay and straw. It allows to very precisely determine the suitability for storage and quality of hay and straw as well as grain – important especially in agriculture, stock breeding and horse keeping. The slim but robust measuring rod should be used for measurements in different depths. If the maximal moisture is <16.0 % u, the material can be stored or spent without hesitation. The additional temperature measurement makes an automatic temperature compensation possible and supports fire prevention (proof of due diligence).

Application:

- fire prevention
- agriculture
- processing / storing / trading of hay or straw
- stock breeding, horse keeping

Specifications:

Measuring range:	0.0 ... 100.0 % u (material moisture) 0.0 ... 50.0 % w (water content) -40.0 ... +200.0 °C (device)
Resolution:	0.1 %, 0.1 %
Characteristics:	hay, straw, grain, reference characteristics, approx. 480 additional material moisture characteristics
Moisture rating:	9-step bar graph (wet ... dry)
Temperature compensation:	automatic or manual
Display:	two 4-digit LCD displays (12.4 mm and 7 mm)
Operating conditions:	-25 ... +50 °C (device), 0 ... +100 °C (rod), 0 ... 95 % RH (non condensing)
Measuring rod:	V4A stainless steel, 600 mm x Ø 10 mm, 1 m connection cable with BNC-/type K- plug, temperature 0 ... 100 °C, 260 g
Features:	interface, analog output (0 ... 1 V), power supply terminal (10.5 ... 12 VDC)
Sort:	the material selection is restricted to up to 8 favorites
Power supply:	9 V battery
Battery life:	approx. 120 h
Housing:	impact-resistant ABS
Dimensions:	142 x 71 x 26 mm (H x W x D)
Weight:	155 g
Scope of supply:	Device, measuring rod GSF 40 TF with temperature sensor, protective bag, battery, calibration protocol, manual

Variants:**BaleCheck 200 - 1000**

Art. no. 607147

Hay and straw humidity measuring device incl. measuring rod 1000 mm

BaleCheck 200 - 1500

Art. no. 607146

Hay and straw humidity measuring device incl. measuring rod 1500 mm

WATER ANALYSIS



APPLICATION:

Waters measuring, fishkeeping, aquafarming (fresh- / marine waters)

Drinking water-, process monitoring, ground measurements

Cleaning processes

Ultrapure water

Food production and -control

Quality management

Water-proof

Electrodes for replacement

EQUIPMENT:

Measuring range

Conductivity / Temperature

esp. Resistance

TDS / Salinity

Sensor connection

Electrode

General functions:

Min/Max, Hold, Auto-Off

Illumination

Interface

Alarm / Data logger

DEVICE INFORMATION:

Catalogue page

GMH 5430

GMH 5450

GMH 3431

GMH 3451

GLF 100

GLF 100 RW

G 1410

G 1420

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

7-pole bayonet

7-pole bayonet

fixed

fixed

fixed

fixed

fixed

fixed

2- or 4-pol.

2- or 4-pol.

2-pole graphite

4-pole graphite

2-pole graphite

2-pole stainless steel

2-pole graphite

2-pole stainless steel

•

•

•

•

•

•

•

•

•

•

Calibration memory

•

•

•

•

Catalogue page

Page 54

Page 54

Page 57

Page 57

Page 58

Page 58

Page 59

Page 59



	GMH 5530	GMH 5550	GMH 3511	GMH 3531	GMH 3551	GPH 114	G1500	G1501	HD-3456-2	GMH 5630	GMH 5650	GMH 3611	GMH 3651	GOX 20	G1610	HD-3409-2
APPLICATION:																
Waters measuring, fish-keeping, aquafarming	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Drinking water-, process monitoring, ground measurement	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Food production and -control	•	•	•	•	•	•	•	•	•							
Precision measurement	•	•	•	•	•				•	•	•					•
Laboratory (GLP)	•	•		•	•				•	•		•	•			•
Quality management	•	•	•	•	•		•	•	•		•		•			•
Water-proof	•	•					•	•		•	•				•	
incl. air pressure measuring										•	•	•	•			•
EQUIPMENT:																
Measuring range pH, mV mg/l, % O ₂ Temperature	• / rH •	•	• / rH •	• / rH	pH	pH	•	• / χ , Ω , TDS, Sal, •	• / ppm, hPa •	• / ppm, hPa •	• / ppm, hPa •	• / ppm, hPa •	mg/l •	•	• / mbar, •	
Connections	BNC-socket		BNC-socket		BNC-socket --	BNC-socket --	BNC-socket 2 banana-j.	8-pole male connector	7 pin bayonet connection	6-pin Mini-DIN-socket		Electrode permanently connected to device			8-pole male connector	
Temperature	2 banana-jack		2 banana-jack													
Temperature compensation	automatic and manual (Pt1000, NTC 10k)		automatic and manual (Pt1000)		manual	manual	auto- matic	auto- matic	automatic	automatic		auto- matic	auto- matic		auto- matic	
General functions: Min/Max, Hold, Auto-Off adjustable calibration interval	• •		•			•	•	•	•	•	•	•	•		•	•
Interface	•	•	•	•					•	•	•	•	•			•
Analog output		•	•	•	•					•	•		•			
Calibration history		•			•				•				•			•
Alarm / Data logger		•			•			•	•		•		•			•
DEVICE INFORMATION:																
Catalogue page	Page 61	Page 61	Page 60	Page 60	Page 60	Page 62	Page 64	Page 64	Page 67	Page 70	Page 70	Page 72	Page 72	Page 70	Page 71	Page 73

WATER-PROOF HANDHELD DEVICE FOR CONDUCTIVITY MEASUREMENT



WATER-PROOF DEVICE AND
PLUG CONNECTIONS



- HIGHLIGHTS:
- Measurement of conductivity, resistance, salinity, TDS
 - Large double display with background illumination
 - Automatic cell correction with reference solutions
 - Incl. calibration protocol

ADDITIONAL FUNCTIONS GMH 5450:



GMH 5430

Art. no. 600035
Water-proof handheld device without electrode

GMH 5450

Art. no. 600037
Water-proof handheld device with analog output and data logger, without electrode

Application:	
Mobile use for: • industry and craft • measurements of waters and aquaristics, fish farming • drinking water monitoring, process control, soil measurements • food production and control • quality management Additional applications at laboratory: • medicine, pharmacy, chemistry	
Specifications:	
Measuring range	
Number of measuring ranges: 5	
Smallest range:	0.000 ... 5.000 µS/cm * or 0.0 ... 500.0 µS/cm **
Biggest range:	0 ... 5000 µS/cm * or 0 ... 1000 mS/cm **
Resistivity:	0.005 ... 500.0 kOhm * cm (depends on cell constant)
TDS:	0 ... 5000 mg/l (depends on cell constant)
Salinity:	0.0 ... 70.0 (g salt / kg water)
Temperature:	-5.0 ... +100.0 °C, Pt1000 or NTC 10 k
Supported cell constants:	4.000 ... 15.000 / cm - 0.4000 ... 1.5000 / cm - 0.04000 ... 0.15000 / cm - 0.004000 ... 0.015000 / cm
Accuracy (at nominal temperature = 25 °C)	
Conductivity:	±0.5 % of m.v. ±0.1 % FS (depends on electrode)
Temperature:	±0.2 K
Connection	
Conductivity, temperature:	1 x 7-pole bayonet connector for connection of different measuring cells, supported temperature sensors: Pt1000 or NTC (10 k)
Interface / ext. supply:	4-pole bayonet connector for serial interface and supply (with accessory: USB adapter USB 5100)
Analog output: (only GMH 5450)	0 ... 1 V, freely adjustable, connection with 4-pole bayonet connector, resolution 13 bit, accuracy 0.05 % at nominal temperature
Data logger: (GMH 5450 only)	cyclic: 10.000 data sets, adjustable cycle time: 1 s ... 60 min manual: 1000 data sets (with measuring point input, 40 adjustable measuring point texts or measuring point numbers)
Display:	4 ½ digit 7-segment, illuminated (white)
Operating conditions:	Device: -25 ... +50 °C, 0 ... 95 % RH (non-condensing)
Storage temperature:	-25 ... +70 °C
Background illumination:	duration adjustable (off, 5 s ... 2 min.)
Power supply:	2 x AAA battery (included), power consumption 6.25 mA
Battery life:	approx. 160 h (without background illumination)
Protection class:	IP65 / IP67

Housing:	Impact-resistant ABS plastic housing, integrated pop-up clip
Dimensions:	160 x 86 x 37 mm (H x W x D) incl. silicone protection cover
Weight:	approx. 250 g incl. battery and protection cover
Scope of supply:	Device, K 50 BL, battery, calibration protocol, manual <i>depends on cell constant of used electrode</i> * cell constant 0.01 / cm ** cell constant 0.1 ... 1.2 / cm (standard)
Additional functions:	
Cell correction Manually or automatically with reference solution	
Automatic temperature compensation As conductivity depends strongly on temperature, each conductivity value is only valid at the corresponding temperature. Therefore the device supports temperature compensation, i.e. referring the conductivity to a reference temperature (selectable: 20 °C or 25 °C).	
Supported types of compensation: nLF: Non-linear function of natural waters acc. to DIN EN 27888 (ISO 7888) (Reference temperature 25 °C) Lin: adjustable linear compensation off: no compensation	
Salinity measurement Salinity means the sum of the concentrations of all dissolved salts in water. The unit is g / kg. (equals PSU = Practical Salinity Unit).	
TDS measurement (total dissolved solids) TDS means the mass concentration of dissolved media in a liquid. The unit is mg / l.	
GLP (Good Laboratory Practice) adjustable calibration intervals GMH 5450: Calibration memory: latest 16 calibrations	
Accessories and spare parts:	
GLK 10... conductivity control solution	see next page
EBS 20M Art. no. 601158 Software for long-term monitoring (p.r.t. page 108)	
GSOFT 3050 Art. no. 601336 Software for operation of logger devices (p.r.t. page 109)	
USB 5100 Art. no. 601095 Electrically isolated interface converter, supplied via USB	
GNG 5 / 5000 Art. no. 602287 Plug-in power supply 5 V DC, suitable for devices of the series GMH 5000 (p.r.t. page 113)	
GKK 5001 Art. no. 611606 with cut-outs for 1 device of the GMH 5xxx-/7500 series and accessories for water analysis (395 x 295 x 106 mm), p.r.t. page 111	

CONDUCTIVITY ELECTRODES



PURE AND ULTRA
PURE WATER

LF 200 RW

Art. no. 602841

Conductivity electrode stainless steel

Specifications:	
Measuring range:	0 ... 200 $\mu\text{S}/\text{cm}$
Temperature range:	-5 ... +100 °C
Cell constant *:	approx. 0,1
Temperature measurement:	NTC 10 k
Shaft:	Stainless steel, $\varnothing$ 12 mm x 75 mm
Electrode:	2-pole stainless steel
Application:	Pure and ultra pure water
Cable length:	1 m
Scope of supply:	Measuring cell, manual



ALCOHOL,
FUEL, DIESEL

LF 210

Art. no. 602969

Conductivity electrode glass / platinum

Specifications:	
Measuring range:	0 ... 1000 $\mu\text{S}/\text{cm}$
Temperature range:	-5 ... +100 °C
Cell constant *:	approx. 1
Temperature measurement:	NTC 10 k
Shaft:	Glass, $\varnothing$ 12 mm x 120 mm
Electrode:	2-pole glass / platinum
Application:	Alcohol, fuel, diesel
Cable length:	1 m
Scope of supply:	Measuring cell, manual

HD-22-3 with probe

**Accessories and spare parts.****HD-22-3**

Art. no. 700040

Freely positionable, flexible laboratory electrode holding arm. For probes with $\varnothing$ 12 mm. (see picture)

GKL 100

Art. no. 601396

Conductivity control solution (100 ml bottle with 1413 $\mu\text{S}/\text{cm}$ according to DIN EN 27888)

GKL 101

Art. no. 601398

Conductivity control solution (250 ml bottle with 84 $\mu\text{S}/\text{cm}$)

GKL 102

Art. no. 601400

Conductivity control solution (100 ml bottle with 50 mS/cm)



FOR UNIVERSAL APPLICATION

LF 400

Art. no. 602968

Conductivity electrode 4-pole graphite

Specifications:	
Measuring range:	0 ... 200 mS/cm
Temperature range:	0 ... 100 °C
Cell constant *:	approx. 0,55
Temperature measurement:	NTC 10 k
Shaft:	Epoxide, $\varnothing$ 12 mm x 120 mm
Electrode:	4-pole graphite
Application:	Universal application, Economy Class
Cable length:	2 m
Scope of supply:	Measuring cell, manual

* Note:

The particular cell constant (appears in calibration protocol and electrode's label) has to be entered to device. Then it is ready-to-use.



TIGHT TOLERANCES,
ROBUST AND PRECISE

LF 425

Art. no. 602840

Conductivity electrode 4-pole graphite

Specifications:	
Measuring range:	0 ... 1000 mS/cm
Temperature range:	-10 ... +80 °C (90 °C - max. 5 min)
Cell constant *:	approx. 0,42
Temperature measurement:	Pt 1000
Shaft:	PVC-C, $\varnothing$ 16 mm x 145 mm
Electrode:	4-pole graphite
Application:	Tight tolerances, robust and precise for highest demands, High End Class
Cable length:	1 m
Scope of supply:	Measuring cell, manual

CONDUCTIVITY MEASUREMENT SET



SET-GMH 5450

Art. no. 611246
Conductivity measurement set

General:
With our ready-to-use conductivity measurement set, you have everything you need for your work in a practical case and with the set price, you save 10 % in comparison with the prices for the individual components.

Application:
No matter which sector you work in, our comprehensive SET-GMH 5450 never lets you down and stows away in the tidy practical case

Specifications:	
Measuring range device	
Number of measuring ranges: 5	
Smallest range:	0.000 ... 5.000 µS/cm * or 0.0 ... 500.0 µS/cm **
Biggest range:	0 ... 5000 µS/cm * or 0 ... 1000 mS/cm **
Resistivity:	0.005 ... 500.0 kOhm * cm (depends on cell constant)
TDS:	0 ... 5000 mg/l (depends on cell constant)
Salinity:	0.0 ... 70.0 (g salt / kg water)
Temperature:	-5.0 ... +100.0 °C, Pt1000 or NTC 10 k

Electrode	
Measuring range:	0 ... 1000 mS/cm
Temperature range:	-10 ... +80 °C (90 °C - max. 5 min.)
Cell constant *:	approx. 0.42
Temperature measurement:	Pt 1000
Shaft:	PVC-C, Ø 16 mm x 145 mm
Electrode:	4-pole graphite
Application:	Tight tolerances, robust and precise for highest demands, High End Class
Cable length:	1 m
Dimensions:	450 x 360 x 123 mm (case)
Weight:	approx. 1800 g
Scope of supply:	Device incl. silicone protection cover, measuring cell, software, interface converter , case, battery, calibration protocol, manuals

Accessories and spare parts:	
GMH 5450	Art. no. 600037 Water-proof handheld device with analog output and data logger, without electrode
LF 425	Art. no. 602840 Conductivity electrode 4-pole graphite
GSOFT 3050	Art. no. 601336 Software for operation of logger devices (p.r.t. page 109)
USB 5100	Art. no. 601095 Electrically isolated interface converter, supplied via USB
GKK 3700	Art. no. 601064 Case with nap foam for universal application (450 x 360 x 123 mm)

HANDHELD INSTRUMENTS INCL. ELECTRODE



GMH 5430-400	Art. no. 602752 Handheld instrument incl. electrode LF 400
GMH 5450-400	Art. no. 602754 Handheld instrument incl. electrode LF 400, with data logger
GMH 5430-425	Art. no. 602753 Handheld instrument incl. electrode LF 425
GMH 5450-425	Art. no. 602755 Handheld instrument incl. electrode LF 425, with data logger
General: All sets get preadjusted and are ready-for-use. They do not include a case.	
Accessories and spare parts:	
GKK 5001	Art. no. 611606 with cut-outs for 1 device of the GMH 5xxx-/7500 series and accessories for water analysis (395 x 295 x 106 mm), p.r.t. page 111

CONDUCTIVITY MEASURING DEVICE



HIGHLIGHTS:

- Display of resistivity, salinity or TDS (total dissolved solids)
- Conform to the regulations of the drinking water ordinance (TrinkwV 2001) and DIN EN 27888

ADDITIONAL FUNCTIONS GMH 3451:



GMH 3431

Art. no. 601917

Conductivity measuring device incl. 2-pole measuring cell

GMH 3451

Art. no. 601919

Conductivity measuring device incl. 4-pole measuring cell, with data logger

General:

Intelligent set with 2-pole measuring cell for tap water, etc., 4-pole worry-free package also suitable for continuous measurement in high conductivity ranges (e.g. salt water)

Specifications:

Measuring range

Conductivity:	0.0 ... 200.0 $\mu\text{S}/\text{cm}$
	0 ... 2000 $\mu\text{S}/\text{cm}$
	0.00 ... 20.00 mS/cm
	0.0 ... 200.0 mS/cm
	0 ... 400 mS/cm (GMH 3451 only)
	manually selectable or AutoRange

Temperature: -5.0 ... +100.0 °C**Resistivity:** 0.005 ... 100.0 $\text{k}\Omega\text{m} \cdot \text{cm}$ **Salinity:** 0.0 ... 70.0 g/kg water**TDS:** 0 ... 1999 mg/lAccuracy (± 1 digit) (at nominal temperature = 25 °C)**Conductivity:** ± 0.5 % of m.v. ± 0.3 % FS or ± 2 $\mu\text{S}/\text{cm}$ **Temperature:** ± 0.2 % of m.v. ± 0.3 K**Cell correction:** adjustable 0.800 ... 1.200 cm^{-1} manually or automatically with selectable reference solution**Temperature compensation:** automatically or off, by temperature sensor integrated to electrode

Type of compensation:

- nLF: Non-linear function of natural waters acc. to DIN EN 27888 (ISO 7888) (Reference temperature selectable: 20 °C or 25 °C)
- Lin: linear compensation from 0.3 ... 3.0 %/K (Reference temperature selectable: 20 °C or 25 °C)
- off: no compensation.

Display: two 4-digit LCD displays (12.4 and 7 mm high) for current conductivity (resistivity, salinity, TDS) and temperature, or for min-, max- value, hold function, etc. and additional indicator arrows

Measuring cell: Conductivity measuring cell with integrated temperature sensor in shaft. Electrode material: graphite. Shaft material: PPE, PS (GMH 3431), Epoxide (GMH 3451). The graphite electrodes are the optimum solution for sewage and can be cleaned easily. GMH 3431: 2-pole; GMH 3451: 4-pole

Warranty for sensor element: 12 months**Working conditions:** device: -25 ... +50 °C, 0 ... 95 % RH; measuring cell: -5 ... +80 °C (permanent), up to +100 °C (short-term)**Relative humidity:** 0 ... +95 % RH (non condensing)

Interface:

serial interface; connectable to RS232 or USB interface of PCs via electrically isolated interface converter GRS 3100, GRS 3105 or USB 3100 N (accessories).

Pushbuttons: 6 membrane keys for ON/OFF-switch, selection of meas. range, min- and max-value memory, hold-function, etc.**Power supply:** 9 V-battery as well as additional PSU connector (internal pin $\varnothing$ 1.9 mm) for external 10.5 ... 12 V DC supply. (suitable power supply: GNG10/3000)**Battery life:** approx. 150 h**Housing:** Impact-resistant ABS plastic housing, membrane keyboard, transparent panel, integrated pop-up clip

Dimensions: Device: 142 x 71 x 26 mm (H x W x D)
Dimensions (electrode shaft): approx. 120 mm long, $\varnothing$ approx. 12 mm, 1 m of fixed connection cable between electrode and device

Weight: approx. 230 g (incl. battery and measuring cell)**Scope of supply:** Device incl. measuring cell, battery, calibration protocol, manual

Additional functions:

Salinity determination:

Salinity is understood to be the sum of concentrations of all salts dissolved in water. Displayed in g/kg.

TDS-determination (total dissolved solids):

The dry residue of filtrate is understood to be the concentration of substances dissolved in a liquid. Displayed in mg/l.

Additional functions GMH 3451:

Analog output:

0 ... 1 V, freely scalable, connection via 3-pole jack socket, $\varnothing$ 3.5 mm, resolution 13 bit, accuracy 0.05 % at nominal temperature

4-pole measuring cell:

Better long-term stability at high conductivity values (>20 mS/cm) and for harsh environments, stable measuring values even in polluted media (e.g. sewage, salt water)

Data logger:

cyclic 10.000 data sets, manual: 1.000 data sets (with measuring point input, 40 adjustable measuring point texts or measuring point numbers)

Variants:

GMH 3431-LTG

Art. no. 608399

GMH 3451-LTG

Art. no. 610028

for organic matter (alcohol, petrol, diesel) up to 1000 $\mu\text{S}/\text{cm}$ with glass shaft, platinum electrodes, 1.35 m PUR-cable permanently connected to device

Accessories and spare parts:

GKL 100

Art. no. 601396

100 ml conductivity test solution (100 ml bottle with 1413 $\mu\text{S}/\text{cm}$, acc. to DIN EN 27888)



CONDUCTIVITY MEASURING DEVICES

**GLF 100**

Art. no. 600109

Universal conductivity measuring device
(incl. calibration protocol)**Application:**

- Fresh and sea water aquaristics
- Fish farming / water monitoring
- Drink water monitoring, etc

GLF 100 RW

Art. no. 600111

Conductivity meter for ultra-pure water

Application:

- Checking of pure and ultra-pure water
- Checking of boiler water
- Functional check of ion exchangers

Specifications:	GLF 100	GLF 100 RW
Measuring ranges		
Conductivity:	0 ... 2000 µS/cm 0.00 ... 20.00 mS/cm 0.0 ... 100.0 mS/cm	0.000 ... 2.000 µS/cm 0.00 ... 20.00 µS/cm 0.0 ... 100.0 µS/cm
Temperature:	-5.0 ... +100.0 °C	-5.0 ... +100.0 °C
TDS:	0 ... 2000 mg/l	—
Salinity:	0.0 ... 50.0 g / kg water	—
Resistivity:	— — —	0.0100 ... 0.2000 MΩ*cm 0.010 ... 2.000 MΩ*cm 0.01 ... 20.00 MΩ*cm
Accuracy (±1 digit, at nominal temperature = 25 °C)		
Conductivity:	±0.5 % of m.v. ±0.5 % FS	typ. ±1 % of m.v. ±0.5 % FS
Temperature:	±0.3 °C	±0.3 °C
Temperature-compensation:	off: deactivated nLF: non-linear, acc. to EN 27888 — —	off: deactivated nLF: non-linear, acc. to EN 27888 LIN: linear, with adjustable coefficients NaCl: compensation for weak NaCl-solutions acc. to EN 60746-3
Reference temperatures:	20 and 25 °C	20 and 25 °C
Measuring cell:	2-pole measuring cell, Ø 12 mm (graphite) Cable length: 1.2 m, with integrated temperature sensor	2-pole measuring cell, Ø 12 mm (stainless steel: 1.4404, 1.4435) Cable length: 1.2 m with integrated temperature sensor
Warranty for sensor element:	12 months	
Display:	approx. 11 mm high, 4½-digit LCD-display	
Operating conditions:	Device: -25 ... +50 °C, 0 ... 95 % RH (non condensing) Measuring cell: -5 ... +80 °C (for short-time: 100 °C)	
Power supply:	9 V battery	
Battery life:	approx. 200 h	
Housing:	impact resistant ABS, membrane keyboard, transparent panel	
Dimensions (device):	110 x 67 x 30 mm (H x W x D)	
Weight:	approx. 155 g	
Scope of supply:	Device incl. measuring cell, battery, calibration protocol (only GLF 100), manual	

HIGHLIGHTS:

- Automatic measuring range change-over
- Automatic temperature compensation via integrated temperature sensor
- Incl. measuring cell

The measuring cell:

The measuring head is designed without compromise. The holes ensure the well exchange of the measuring fluid, nonetheless the sensor is protected against mechanical loads. The integrated temperature sensor has very quick response time. Compared to simpler electrode designs the measurements are much more accurate and faster.

GLF 100:

Graphite used as material for the electrodes makes the applicability up to 100 mS / cm possible - a must have in seawater analytic

GLF 100 RW:

Universal applicability at highest standards is made possible by the use of stainless steel electrodes (1.4404).

**Accessories and spare parts:****GKL 100**

Art. no. 601396

Conductivity control solution
(100 ml bottles with 1413 µS / cm acc. to DIN EN 27888)**GKL 101**

Art. no. 601398

Conductivity control solution
(250 ml bottles with 84 µS / cm)**GKL 102**

Art. no. 601400

Conductivity control solution
(100 ml bottles with 50 mS / cm)**HD-22-3**

Art. no. 700040

Freely positionable, flexible laboratory electrode holding arm. For probes with Ø 12 mm.

GWZ-01

Art. no. 603499

Flow-through chamber (for measuring cell with Ø 12 mm, hose connection Ø 6 mm)



PRECISE CONDUCTIVITY MEASURING DEVICE



DURABLE AND AFFORDABLE



G 1410



G 1420

HIGHLIGHTS:

- Modern and functional housing
- Outstanding price/performance ratio
- 3-line display / overhead display at the push of a button
- Backlighting
- Waterproof (IP67)
- Durable, long battery life
- High-quality measuring cell for wider range of application included
- rapid measurement detection

G 1410

Art. no. 610006

Precise wide-range measuring device for conductivity of up to 100 mS/cm, incl. graphite measuring cell

G 1420

Art. no. 610007

High-resolution measuring device for the purest water with up to 100 µS/cm, incl. stainless steel measuring cell

General:

The primary focus in the development of the new GMH 1000 series was placed on the essential functions of the measurement technology. Pure measurement with a focus on precision, speed and reliability packaged in a compact housing distinguish an impressive price/performance ratio, Made in Germany.

The new handheld measuring devices also impress with their ergonomic design, dust and water-protected design in accordance with IP 65/67 and the illuminated display. The compact conductivity measuring device as a G 1410 is a precise and durable wide-range measuring cell for universal use from DI water to salt water. As a G 1420, it has a specialised measuring cell for high-resolution clean/cleanest water applications.

Application:

Freshwater and salt water aquariums, reverse osmosis and similar filters, cleaning processes, cooling/lubricating processes, plant cultivation and agriculture; laboratories, quality assurance, service

Display:

3-line unit with battery status indicator, background light, protected by an unbreakable pane, overhead display at the push of a button

Operation:

4 long-lasting, easy-to-operate buttons

Additional functions:

automatic measuring range shifting, automatic temperature compensation

Display unit environment:

-20 ... +50 °C, 0 ... 95 % RH

Power supply:

2 x AA battery, >1000 h operating time

Protection rating:

IP65 / IP67

Housing:

Break-proof ABS housing

Dimensions:

108 x 54 x 28 mm (H x W x D) without sensor connection

Weight:

approx. 200 g (G 1410)
approx. 230 g (G 1420)

Scope of supply:

Device with measuring cell, calibration log, 2 x battery, manual

Accessories and spare parts:

GKL 100

Art. no. 601396

Conductivity control solution (100 ml bottle with 1413 µS/cm, in accordance with DIN EN 27888)

GKL 101

Art. no. 601398

Conductivity control solution (250 ml bottle with 84 µS/cm)

GKL 102

Art. no. 601400

Conductivity control solution (100 ml bottle with 50 mS/cm)

HD-22-3

Art. no. 700040

Freely positionable, flexible laboratory electrode holding arm. For probes with Ø 12 mm.

GWZ-01

Art. no. 603499

Flow-through vessel (for measuring cells with Ø 12 mm, hose connection Ø 6 mm)

ST-G1000

Art. no. 611373

Device protection bag with 1 round cut-out

GB AA

Art.-Nr. 610049

Spare battery AA (2 batteries required)

Specifications:	G 1410	G 1420
	Wide-range measuring device, incl. graphite measuring cell	Cleanest water version, incl. stainless steel measuring cell
Measurement:	Conductivity, salinity, TDS	conductivity, specific
Measuring range:	With automatic measuring range shifting	
Conductivity:	0 ... 2000 µS/cm 0.00 ... 20.00 mS/cm 0.0 ... 100.0 mS/cm	0.000 ... 2.000 µS/cm 0.00 ... 20.00 µS/cm 0.0 ... 100.0 µS/cm
Specific resistance:	--	0.0100 ... 0.2000 MOhm*cm 0.010 ... 2.000 MOhm*cm 0.01 ... 20.00 MOhm*cm
TDS:	0 ... 2000 mg/l	--
Salinity (PSU):	0.0 ... 50.0 g/kg water	--
Temperature:	-5.0 ... +105.0 °C	-5.0 ... +105.0 °C
Accuracy		
Conductivity:	±0.5 % of m.v. ±0.5 % FS	Typ. ±1 % of m.v. ±0.5 % FS
Temperature:	±0.3 °C	±0.3 °C
Temperature compensation:	off: deactivated nLF: non-linear, according to EN 27888	off: deactivated nLF: non-linear, according to EN 27888 LIN: linear with variable coefficients NaCl: For weak NaCl solutions in accordance with EN 60746-3
Reference temperatures:	20 and 25 °C	20 and 25 °C
Sensors/measuring inputs:	permanently connected 2-pole measuring cell with integrated temperature sensor	
Measuring cell:	2-pole measuring cell, Ø 12 mm (graphite), cable 1.2 m (others available for surcharge)	2-pole measuring cell, Ø 12 mm (stainless steel 1.4404, 1.4435), cable 1.2 m (others available for surcharge)
Range of application:	-5 ... +80 °C (short-term 100 °C)	

PH / ORP / TEMPERATURE MEASURING DEVICES



HIGHLIGHTS:

- ORP mode allows for automatic conversion to hydrogen system electrodes
- temperature compensation
- Automatic buffer detection
- Rating function of electrode's quality
- New: analog output for all variants

ADDITIONAL FUNCTIONS GMH 3551:



GMH 3511

Art. no. 604953

pH / ORP / temp. measuring device w/o accessories

GMH 3531

Art. no. 602076

pH / ORP / temp. measuring device w/o accessories

GMH 3551

Art. no. 602817

pH / ORP / temperature measuring device with data logger w/o accessories

Specifications:

Measuring ranges

Temperature:	-5.0 ... +150.0 °C or 23.0 ... +302.0 °F
pH:	0.00 ... 14.00 pH
Redox (ORP):	-1999 ... +2000 mV Based on hydrogen system: -1792 ... +2207 mV _H (DIN 38404)
rH:	0.0 ... 70.0 rH (not GMH 3511)
Accuracy (device) ±1 digit at nominal temperature = 25 °C	
Temperature:	±0.2 °C (at range -5 ... +100 °C)
pH:	±0.01 pH
Redox (ORP):	±0.1 % FS (mV bzw. mV _H)
rH:	±0.1 rH (not GMH 3511)

Sensor connections

Temperature:	2 x 4 mm banana socket for Pt1000, 2-wire
pH, Redox:	BNC socket
Display:	two 4-digit LCD displays (12.4 and 7 mm high)

Working temperature: 0 ... +50 °C**Storage temperature:** -20 ... +70 °C

Interface: serial interface; connectable to RS232 or USB interface of PCs via electrically isolated interface converter GRS 3100, GRS 3105 or USB 3100 N (accessories).

Power supply: 9 V battery, additional socket for external 10.5 ... 12 V direct current power supply (adequate PSU: GNG10/3000)

Battery life: approx. 300 h

Housing: Impact-resistant ABS plastic housing, membrane keyboard, transparent panel, integrated pop-up clip

Dimensions: 142 x 71 x 26 mm (H x W x D)**Weight:** approx. 170 g

Scope of supply: Device, battery, calibration protocol, manual

Functions:

Automatic temperature compensation:

In operation mode „pH“ an automatic temperature compensation (ATC) is possible in the range 0 ... 105 °C if a temperature probe is connected. Otherwise a manual input of temperature is possible.

pH calibration:

Buffer selection, temperature compensation and sensor rating according to calibration result (from 10 ... 100 %) is done automatically.

GMH 3511: 2-point calibration with Greisinger buffer capsules (GPH 4, 7, 10)

GMH 3531, GMH 3551: Either 1-, 2- of 3- point calibration with Greisinger standard buffer, buffer according to DIN19266 (A, C, D, F, G) or manual buffer selection.

Calibration interval (not for GMH 3511):

The device asks for a recalibration after a selectable time period (1 ... 365 days or inactive)

GMH 3551: Calibration history additional

ORP measurement (Redox):

There are 2 choices:

- „mV“: standard ORP or mV measurement
- „mV_H“: temp. compensated conversion to hydrogen system acc. to DIN38404 part 6, table 1 based on the standard ORP electrode (e.g. GE105 with Ag/AgCl system and 3 mol KCl) used.

rH measurement (not GMH 3511):

Calculation of the rH value by means of a ORP measurement and by manually entering the pH-value. The pH-value may also be taken from a previous pH measurement.

Analog output:

0 ... 1 V, not changeable 0 ... 1 V ± 0 ... 14 pH or -2000 ... +2000 mV, connection via 3-pole jack socket Ø 3.5 mm, resolution 13 bit, accuracy 0.05 % at nominal temperature

GMH 3551: Analog output freely scalable

Data logger (GMH 3551 only):

cyclic 10,000 data sets, manual: 1,000 data sets (with measuring point input, 40 adjustable measuring point texts or measuring point numbers)

Accessories and spare parts:

GMH 55 ES

Art. no. 603066

Additional set: pH-electrode GE 100 BNC, temperature probe GF 1T-T3-B-BS (Pt1000), case GKK 3500, GAK 1400

GF 1T-T3-B-BS

Art. no. 611088

Pt1000 handheld sensor, Pt1000 Class B, with 2 banana plugs

GE 100-BNC

Art. no. 600704

Standard electrode, BNC plug

GE 117-BNC

Art. no. 600730

pH electrode with integrated Pt1000 sensor (see p. 59)

GNG 10/3000

Art. no. 600273

Plug-in power supply

GKK 3001

Art. no. 611605

with cut-outs for 1 device of the GMH 3xxx series and accessories for water analysis (395 x 295 x 106 mm)

USB 3100 N

Art. no. 601092

Interface converter to USB, electrically isolated

EBS 20M

Art. no. 601158

Software for read-out, recording and archiving of measuring data (see page 108).



GMH 3511-Set

Art. no. 605021

Full set for pH/temperature measurements

General:

For comfortable measurements of pH value and temperature. Even easier operation ensured by a menu reduced to 5 points for GMH 3511. Minimal measuring effort because of maintenance-free gel-electrode and automatic temperature compensation.

Specifications:

p.r.t. GMH 3511

Scope of supply: GMH 3511, pH electrode GE 114, temperature probe GF 1T-T3-B-BS, buffer capsules 5 x GPH 4, 5 x GPH 7, 2 plastic wide mouth bottles GPF 100

Spare parts:

GE 114-BNC

Art. no. 604701

Spare electrode

GKK 3001

Art. no. 611605

with cut-outs for 1 device of the GMH 3xxx series and accessories for water analysis (395 x 295 x 106 mm)

WATERPROOF HANDHELD MEASURING DEVICE FOR pH / REDOX



WATER-PROOF DEVICE AND
PLUG CONNECTIONS

HIGHLIGHTS:

- GLP-features (Good Laboratory Practice)
- Big dual display with background illumination
- High resolution (0.001pH / 0.1 mV)
- Incl. calibration protocol

ADDITIONAL FUNCTIONS GMH 5550:



GMH 5530

Art. no. 600041

Waterproof handheld measuring device without electrode

GMH 5550

Art. no. 600043

Waterproof handheld measuring device with analog output and data logger, without electrode

Application:

- Waters measuring, fishkeeping, aquafarming
- Drinking water monitoring, process control, soil measuring
- Food production and monitoring
- Laboratory: Medicine, pharmaceuticals, chemistry
- Quality management

Specifications:

Measuring ranges

pH:	-2.000 ... 16.000 pH (resolution selectable)
Redox / mV:	-2000.0 ... 2000.0 mV (resolution selectable) for hydrogen system DIN38404: -1792 ... +2207 mV _H)
Temperature:	-5.0 ... +150.0 °C; 23.0 ... 302.0 °F
rH:	0.0 ... 70.0 rH

Accuracy

pH:	±0.005 pH
Redox / mV:	±0.05 % FS (mV or mV _H)
Temperature:	±0.2 °C (in the range of -5.0 ... +100.0 °C)
rH:	±0.1 rH

Connections

pH, Redox:	BNC-female connector, compatible to standard BNC-plugs and waterproof BNC-plugs, additional banana-jack (4 mm) for separate reference electrode, input resistance: 10 ¹² Ohm
Temperature:	2 banana-jacks (4 mm) for temperature probes (Pt1000 or NTC 10K)
Interface / Supply:	4-pole bayonet connector for serial interface and supply (with accessory USB 5100)

Operating conditions: -25 ... +50 °C; 0 ... 95 % RH (non condensing)

Display: two 4 ½ digit 7-segment displays (15 mm and 12 mm)

pH-Calibration

Automatically: 1-, 2- or 3- point calibration, GREISINGER standard buffer or buffer to DIN19266 (A, C, D, F, G)

Manual: 1-, 2- or 3- point calibration

Power supply: 2 x AAA-battery, power consumption: <1.0 mA

Battery life: 1000 hours

Housing: impact resistant ABS housing with pop-up clip

Protection class: IP65 / IP67

Dimensions: 160 x 86 x 37 mm (H x W x D) incl. protection cover

Weight: 250 g incl. battery and protection cover

Scope of supply: Device, battery, calibration protocol, manual

Additional functions:

Additional Display for pH-Electrode and Battery: Bar graph display

Background illumination: duration adjustable (off, 5 s ... 2 min)

Automatic Temperature Compensation: There is an automatic temperature compensation (ATC) in the range of 0 ... 105 °C for operation mode "pH" and if a temperature probe is connected. Without connected probe the temperature can be input manually.

pH-Calibration: 1-, 2- or 3- point calibration with characteristics bend for GREISINGER standard buffer, buffer to DIN 19266 or manual buffer input. The used buffer is detected automatically. The temperature dependency of the buffer is automatically compensated. Permissible electrodes' data: Asymmetry: ±55 mV / Slope: 45 ... 62 mV/pH
The condition of pH-Electrode is checked at each calibration.

Redox-Measurement (ORP): 2 choices:

„mV“ Standard-Redox-, ORP or mV- measurement

„mV_H“ Conversion to hydrogen systems according to DIN38404 part 6

rH-Measurement: The rH-value is calculated from a measured Redox-value and a manually input pH-value.

Calibration interval:

The device asks for a recalibration after a selectable time period (1 ... 365 days or inactive)

Calibration memory (GMH 5550):

last 16 calibrations

Analog output (GMH 5550):

0 ... 1 V, freely adjustable, connection with 4-pole bayonet connector, resolution 13 bit, accuracy 0.05 % at nominal temperature

data logger (only GMH 5550):

with measuring point input, adjustable cycle time: 1 s ... 1 h

recording time: 416 days at interval 1 h,

data logger: cyclic: 10000 data sets, manual: 1000 data sets

Accessories and spare parts:

EBS 20M

Art. no. 601158

Software for long-term monitoring (p.r.t. page 108)

GSOFT 3050

Art. no. 601336

Software for operation of logger devices (p.r.t. page 109)

USB 5100

Art. no. 601095

Electrically isolated interface converter with supply of device via USB

GNG 5 / 5000

Art. no. 602287

Plug-in power supply 5 V DC, suitable for GMH 5000-series (p.r.t. page 113)

GKK 5001

Art. no. 611606

with cut-outs for 1 device of the GMH 5xxx-/7500 series and accessories for water analysis (395 x 295 x 106 mm), p.r.t. page 111

PH / REDOX ACCESSORIES

Supplementary set
GMH 55 ES



Accessories and spare parts:

GMH 55 ES

Art. no. 603066

Supplementary set, including pH-electrode (GE 100 BNC), temperature probe (GF 1T-T3-B-BS), case (GKK 3500), working and calibration set (GAK 1400)

GE 125-BNC

Art. no. 600732

waterproof pH-electrode with integrated Pt1000 temperature sensor incl. waterproof BNC-plug and two banana plugs (p.r.t. page 65)

**GF 1T-T3-B-BS**


Art. no. 611088

Pt1000 handheld probe

-70 ... +250 °C, Pt1000 class B

immersion probe Ø 3 mm made of V4A tube, black silicone handle up to +250 °C, 1 m, silicone cable up to +230 °C permanently / +250 °C for 2 h, 2 x Ø 4 mm banana plug

Response time T₉₀: water 0.4 m/s < 2 s, air 2 m/s approx. 40 s

**GE 100-BNC**

Art. no. 600704

pH-electrode (p.r.t. page 65)

**GR 105-BNC**

Art. no. 607798

Redox-electrode (p.r.t. page 66)

**PHL 4**

Art. no. 601369

ready-to-use buffer solution (pH 4.01 / 25 °C), 250 ml

PHL 7

Art. no. 601371

ready-to-use buffer solution (pH 7.00 / 25 °C), 250 ml

PHL 10

Art. no. 601373

ready-to-use buffer solution (pH 10.01 / 25 °C), 250 ml

KCL 3 M

Art. no. 602477

3 mol KCl electrolyte for refill or storage (filled in the protective cap) of electrodes with 3 mol KCl electrolyte. 100 ml plastic vial.

CaCl

Art. no. 603254

1000 ml, solution for measuring the pH value of soil

GRL 100

Art. no. 601422

Pepsin cleaning solution, 100 ml

GRP 100

Art. no. 601424

ORP buffer solution (220 mV at 25 °C), 100 ml

GAK 1400

Art. no. 603523

Working and calibration set

General:**Working and calibration set consisting of:**

Working and calibration set consisting of:
5 buffer capsules each GPH 4.0, GPH 7.0 and GPH 10.0, 3 x 100 ml-plastic bottle GPF 100, 1 x 3 mol KCL-electrolyte KCL3M and 1 x Pepsin-cleaning agent GRL 100. GAK 1400 is required if no buffer solutions are existing.



PH-METER



GAK 1400
RECOMMENDED!

GPH 114

Art. no. 604700

pH-meter ready for use incl. pH-electrode type GE 114 and battery.

Specifications:

Measuring range:	0.00 ... 14.00 pH with standard pH-electrode type GE 114
Resolution:	0.01 pH
Accuracy (device):	±0.02 pH ±1 digit (at nominal temperature 25 °C)
Operating conditions:	0 ... 45 °C; 0 ... 80 % RH (non condensing)
Storage temperature:	-20 ... +70 °C
Connection:	BNC bayonet
pH-electrode:	GE 114 (standard electrode), combination electrode with GEL-electrolyte. Measuring range: 0 ... 14 pH, temperature 0 ... 60 °C, conductivity >200 µS/cm
Input resistance:	approx. 10 ¹² Ohm
Display:	3½-digit LCD display, 13 mm high
Calibration:	3 turning knobs for: 1. temperature compensation 0 ... 90 °C, 2. pH 7 value and 3. pH X value (e.g. pH 1.09, pH 4, pH 10 or pH 12, depends on working range)
Power supply:	9 V battery
Battery life:	approx. 200 h
Housing:	Impact resistant ABS
Dimensions:	106 x 67 x 30 mm (H x W x D)
Weight:	approx. 200 g (incl. battery and electrode)
Scope of supply:	Device, electrode, battery, manual

Accessories and spare parts:**GE 114-BNC**

Art. no. 604701

Spare electrode

GPH 114 GL

Art. no. 606082

Loose device (without accessories)

GE 100-BNC

Art. no. 600704

Universal electrode (0 ... 14 pH, 0 ... 80 °C)

GE 101-BNC

Art. no. 600693

Injection electrode (2 ... 11 pH, 0 ... 60 °C)

GE 104-BNC

Art. no. 602063

pH-electrode for low-ion water (as of 25 µS/cm)

GKK 252

Art. no. 601056

Case (235 x 185 x 48 mm) with foam lining

GKK 1100

Art. no. 601060

Case (340 x 275 x 83 mm) with foam lining

GB 9 V

Art. no. 601115

Spare battery

additional accessories p.r.t. page 66

PH MEASUREMENT SET



SET-GMH 5550

Art. no. 611254

pH measurement set

General:

With our ready-to-use pH measurement set, you have everything you need for your work in a practical case and with the set price, you save 23 % in comparison with the prices for the individual components

Application:

No matter which sector you work in, our comprehensive SET-GMH 5550 never lets you down and stows away in the tidy practical case

Specifications:

Measuring ranges

pH:	-2.000 ... 16.000 pH (resolution selectable)
Redox / mV:	-2000.0 ... 2000.0 mV (resolution selectable) for hydrogen system DIN38404: -1792 ... +2207 mV _H)
Temperature:	-5.0 ... +150.0 °C; 23.0 ... 302.0 °F
rH:	0.0 ... 70.0 rH
Dimensions:	450 x 360 x 140 mm (case)
Weight:	approx. 5700 g
Scope of supply:	Device with silicone protective sleeve, pH electrode, 3 x buffer solution, KCL electrolyte, pepsin cleaning solution, Software, case, battery, calibration protocol, manual

Accessories and spare parts:

GMH 5550

Art. no. 600043

Waterproof handheld measuring device with analog output and data logger, without electrode (p.r.t. page 61)

GE 125-BNC

Art. no. 600732

waterproof pH electrode, incl. Pt 1000 temperature sensor with waterproof BNC plug and banana plug (p.r.t. page 65)

PHL 4

Art. no. 601369

ready-to-use buffer solution (pH 4.01 / 25 °C), 250 ml

PHL 7

Art. no. 601371

ready-to-use buffer solution (pH 7.00 / 25 °C), 250 ml

PHL 10

Art. no. 601373

ready-to-use buffer solution (pH 10.01 / 25 °C), 250 ml

KCL 3M

Art. no. 602477

3 mol KCl electrolyte for refill or storage (filled in the protective cap) of electrodes with 3 mol KCl electrolyte. 100 ml plastic vial.

GRL 100

Art. no. 601422

Pepsin cleaning solution, 100 ml

GSOFT 3050

Art. no. 601336

Windows-software for handheld instruments with logger (p.r.t. page 109)

USB 5100

Art. no. 601095

galvanically isolated interface converter with device power supply via USB

GKK 2019

Art. no. 611147

Case with cut-outs for 1 device of the GMH 5000 series and accessories (450 x 360 x 140 mm)

COMPLETE SET



G 1501-Set

Art-Nr: 611385

Complete set for pH/temperature measurement

General:

Affordable set for temperature-compensated pH measurement

Application:

Aquariums and aquaculture, plant cultivation and agriculture, laboratories, quality assurance, service, foods, etc.

Specifications:

Measuring range:	0.00 ... 14.00 pH
Resolution:	0.01 pH
Accuracy (device):	±0.02 pH ±1 digit (at nominal temperature 25 °C)
Temperature (G 1501 only):	
Measuring input:	2 x 4 mm banana for Pt 1000, 2-wire
Measuring range:	-5.0 ... +105.0 °C or 23.0 ... 221.0 °F
Accuracy:	±0.2 °C ±1 digit (at nominal temperature 25 °C)
Redox (OPR) (G 1501 only)	
Measuring input:	BNC socket (Redox or pH measurement adjustable via menu)
Measuring range:	-1500 ... 1500 mV or -1293 ... 1707 mV _H
Accuracy:	±0.1 % FS ±1 digit (at nominal temperature 25 °C)
Scope of supply:	G 1501 incl. electrode GE 114-WD, temperature sensor, buffer capsules, wide-neck bottle GPF 100

Accessories and spare parts:

See page 64

PRECISE PH MEASURING DEVICE



DURABLE AND AFFORDABLE

HIGHLIGHTS:

- Modern and functional housing
- 3-line display / overhead display at the push of a button
- Backlighting
- Waterproof (IP65 / IP67)
- Durable, long battery life
- BNC connection for alternating electrodes

NEW: G 1501

- with Redox (ORP) and temperature measurement
- Alarm function

ADDITIONAL FUNCTIONS G 1501:



NEW!



Connection G 1500



Connection G 1501

G 1500

Art. no. 609850

Precise pH measuring device, incl. pH electrode GE 114-WD

G 1501

Art-Nr: 611725

pH/Redox(ORP)/temperature measuring device with alarm function, incl. pH electrode GE 114-WD

General:

The primary focus in the development of the new GMH 1000 series was placed on the essential functions of the measurement technology.

Pure measurement with a focus on precision, speed and reliability packaged in a compact housing distinguish an impressive price/performance ratio. Made in Germany. The new handheld measuring devices also impress with their ergonomic design, dust and water-protected design in accordance with IP 65/67 and the illuminated display. The compact pH-meter is an alternative to pH sticks and elaborate middle-class devices.

Additional with G 1501:

The G 1501 also enables Redox (ORP) measurement (with temperature-compensated conversion of the Ag/AGCl reference system to a hydrogen system in accordance with DIN 38404 part 6, table 1) and automatic temperature compensation with connected Pt 1000 temperature sensor for pH and mVH measurements. An optical and visual alarm signal (min/max) is also included.

Application:

Aquariums and aquaculture, plant cultivation and agriculture, laboratories, quality assurance, service, foods, etc.

Specifications:

Measuring range: 0.00 ... 14.00 pH

Resolution: 0.01 pH

Accuracy (device): ± 0.02 pH ± 1 digit (at nominal temperature 25 °C)

Temperature (G 1501 only):

Measuring input: 2 x 4 mm banana for Pt 1000, 2-wire

Measuring range: -5.0 ... +105.0 °C or 23.0 ... 221.0 °F

Accuracy: ± 0.2 °C ± 1 digit (at nominal temperature 25 °C)

Redox (ORP) (G 1501 only)

Measuring input: BNC socket (Redox or pH measurement adjustable via menu)

Measuring range: -1500 ... 1500 mV or -1293 ... 1707 mV_H

Accuracy: ± 0.1 % FS ± 1 digit (at nominal temperature 25 °C)

Display: 3-line unit, with backlight light, protected by an unbreakable pane, overhead display at the push of a button

Sensors / measuring inputs: pH electrode connectable via BNC, Standard GE 114 WD
Temperature compensation which can be set on the device
Electrode range of application: 0 ... 60 °C

Working temperature: Display unit -20 ... +50 °C

Power supply: 2 x AA battery, approx. 3000 h operating time

Housing: Break-proof ABS housing

Dimensions: 108 x 54 x 28 mm (H x W x D) without sensor connection

Weight: approx. 130 g (without electrode)

Scope of supply: Device, electrode, calibration log, 2 x battery, manual

Accessories and spare parts:

G 1500-GL

Art. no. 609851

Device without electrode

G 1501-GL

Art. no. 611483

Device without electrode

GE 114-BNC-WD

Art. no. 610460

Spare pH electrode with waterproof BNC-connector, IP 67

GE 114-BNC

Art. no. 604701

Spare pH electrode

GE 100-BNC

Art. no. 600704

pH electrode

for additional electrodes, see the next page

GKK 252

Art. no. 601056

with nap foam for universal application (235 x 185 x 48 mm)

GKK 1100

Art. no. 601060

with nap foam for universal application (340 x 275 x 83 mm), suitable to accommodate accessories

PHL 4

Art. no. 601369

ready-to-use buffer solution (pH 4.01 / 25 °C), 250 ml

PHL 7

Art. no. 601371

ready-to-use buffer solution (pH 7.00 / 25 °C), 250 ml

PHL 10

Art. no. 601373

ready-to-use buffer solution (pH 10.01 / 25 °C), 250 ml

GAK 1400

Art. no. 603523

Working and calibration set consisting of: 5 of each of GPH 4.0, GPH 7.0 and GPH 10.0 buffer capsules, 3 x 100 ml plastic bottle GPF 100, 1 x 3 mol KCL electrolyte KCL3M and 1 x pepsin cleaning solution GRL 100.

ST-G1000

Art. no. 611373

Device protection bag with 1 round cut-out

GB AA

Art.-Nr: 610049

Spare battery AA (2 batteries required)

Accessories for G 1501:

GF 1T-T3-B-BS

Art. no. 611088

Pt1000 handheld sensor, Pt1000 Class B, with 2 banana plugs

GR 105-BNC

Art. no. 607798

Redox electrode with BNC connection

GRP 100

Art. no. 601424

ORP buffer solution (220 mV at 25 °C), 100 ml

PH ELECTRODES



	GE 100	GE 101	GE 104	GE 108	GE 114	GE 117	GE 120	GE 125	GE 151	GE 171	GE 173
Measuring range	0 ... 14 pH 0 ... 80 °C	2 - 11 pH 0 - 60 °C	0 ... 14 pH 0 - 80 °C	0 ... 14 pH 0 ... 80 °C	0 ... 14 pH 0 ... 60 °C	0 ... 14 pH 0 ... 80 °C	0 ... 14 pH 0 ... 60 °C	0 ... 14 pH 0 ... 70 °C	0 ... 14 pH 0 ... 80 °C	0 ... 14 pH 0 ... 140 °C	0 ... 14 pH 0 ... 80 °C
Conductivity	>100 µS/cm	>100 µS/cm	>20 µS/cm	>100 µS/cm	>200 µS/cm	>100 µS/cm	>200 µS/cm	>200 µS/cm	>100 µS/cm	>100 µS/cm	>50 µS/cm
Temperature measuring	no	no	no	no	no	integr. Pt1000 4 mm banana	no	integr. Pt1000 4 mm banana	no	no	no
Water-proof	no	no	no	no	no	no	no	ja	no	no	no
Pressure resistant	no	no	no	6 bar	no	6 bar	no	1 bar	no	10 bar	6 bar
Cable	1 m ¹⁾	1 m ¹⁾	1 m ¹⁾	2 m ¹⁾	1 m	2 m ²⁾	1 m	2 m	1 m ¹⁾	without	1 m ¹⁾
Electrolyte	3 mol/l KCl	3 mol/l KCl	3 mol/l KCl	gel electrolyte	gel electrolyte	gel electrolyte	gel electrolyte	gel electrolyte	3 mol/l KCl	gel electrolyte	gel electrolyte
Diaphragm	2 x ceramic	2 x ceramic	moving joint	2 x ceramic	1 x Pellon	2 x ceramic	2 x ceramic	1 x ceramic	1 x ceramic	2 x ceramic	joint
Thread	without	without	without	PG 13.5	without	PG 13.5	without	without	without	PG 13.5	PG 13.5
Electrode shaft	tyril, Ø 12 mm x 120 mm	glass, Ø 12 or 6 mm x 120 mm	glass, Ø 12 mm x 120 mm	PSU, Ø 12 mm x 120 mm	epoxide, Ø 12 mm x 120 mm	PSU, Ø 12 mm x 120 mm	PVC, Ø 22 mm x 110 mm	epoxide, Ø 12 mm x 120 mm	glass, Ø 12 mm x 120 mm	glass, Ø 12 mm x 120 mm	glass, Ø 12 mm x 120 mm
Features	universal electrode	tip Ø 6 mm, small sample volume	for low-ion media	low- maintenance	Low-cost low- maintenance	temperature compensated	insertion electrode, blade Ø 13 mm x 60 mm	submersible, water-proof IP67 (also BNC-plug)	chemicals- resistant glass shaft	for extreme conditions, sterilizable, autoclavable	for process chemistry, bio-chemistry, alkali-resistant
Connection:											
BNC											
Art. no.	600704	600693	602063	600713	604701	600730	600698	600732	600727	-	600735
Cinch											
Art. no.	600702	600690	604504	600711	-	-	600696	-	600724	-	600734
S7*)											
Art. no.	-	-	-	606089	-	-	-	-	-	606375	606572

*) Note: cable GEAK-2S7-BNC or GEAK-5S7-BNC is needed for connection S7, for devices with cinch connection adapter GAD 1 BNC is necessary. Electrodes are consumption objects. Lifetime under careful treatment: >2 years; warranty: 12 months

Options:

Longer cable for ¹⁾²⁾
(available cable lengths: up to 5 m)

Special designs
(electrodes with thread, other lengths,
special applications etc.)

Accessories and spare parts:

Kabel-BNCM/BNCF

Art. no. 606158

Extension cables for electrodes with BNC connector,
Cable length: 3 m



Diaphragm:

The diaphragm makes the electric connection between reference system and sample. Additionally it should prevent the spoiling of the reference electrolyte by the measured medium.

Ceramic diaphragm

Porous ceramic rods ensure low leak rates.

Application:

General applications in clean till lightly
soiled media.

Joint / movable joint

The roughened surface between the cut glass
of the electrode and a cut glass sleeve permits
an electrolyte flow of several ml/h.

Application:


low-ion or heavily soiled samples

Pellon diaphragm

A permeable diaphragm made of Pellon
texture is used for fast response times and
stable measuring values

Application:

Clean till lightly soiled media.



Reference electrolyte:

The reference electrolyte offers a constant voltage of the
reference system and makes the electrical connection
between sample and reference electrode.

Liquid electrolyte

Mainly 3 mol/l KCl is used. Liquid electrolytes offer fast
response times in general and can be replaced if contami-
nated.

Gel electrolyte

The electrolyte is solidified for low-maintenance electrodes
able to measure irrespective of its position. Under normal
measurement conditions no noticeable electrolyte leakage
is observable.

Electrodes with S7 connection:

The electrodes are offered with an S7 industrial screw plug
fitted, also known as industrial-S8 Plug head. In contrast to
S7 lab plug head this one is for direct installation in fittings
with PG 13.5 suitable thread.

APPLICATION AREAS: ELECTRODES

APPLICATION	GE 100	GE 101	GE 104	GE 108	GE 114	GE 117	GE 120	GE 125	GE 151	GE 171	GE 173	GR 105	GR 175
Sewage													
Aquarium water	•		•	•	•	•			•			•	•
Soil testing		•											
Emulsions		•	•										
On-site measurements				•	•	•		•				•	
Fish farming	•		•	•	•	•		•	•			•	•
Galvanic baths												•	•
Beverages								•	•			•	•
Low-ion media			•									•	
Cosmetics			•										
Food sample		•					•						
Sea water	•	•	•	•	•	•	•	•	•	•	•	•	•
Online measuring										•	•		•
Process chemistry									•	•	•		•
Swimming pool water	•			•	•	•		•				•	•
Suspensions		•	•										•
Drinking water	•		•	•	•	•		•				•	•
Water-based lacquers			•									•	

Note: The set information are to provide general recommendations. It needs to be checked, which electrodes for each area of application are suitable.

ORP ELECTRODES



GR 105-BNC

Art. no. 607798
ORP electrode with BNC connection

GR 105-Cinch

Art. no. 607797
ORP electrode with Cinch connection



GR 175-BNC

Art. no. 607801
ORP electrode with BNC connection

GR 175-S7

Art. no. 607802
ORP electrode incl. S7 connector - without connecting cable *)

Specifications:	GR 105	GR 175
Measuring unit:	ORP	
Measuring range:	±2000 mV, 0 ... 80 °C	
Conductivity:	>100 µS / cm	
Temperature measurement:	no	
Water-proof:	no	
Pressure resistant:	no	6 bar
Cable:	1 m ¹⁾	without / 1 m
Electrolyte:	3 mol/l KCL	Gel-Elektrolyt
Diaphragm:	2 x ceramic	1 x ceramic
Metal electrode:	Platin dome Ø 5 mm	
Thread:	without	PG 13,5
Electrode shaft:	tyril, Ø 12 mm x 120 mm	glass, Ø 12 mm x 120 mm
Minimal depth of immersion:	15 mm	
Scope of supply:	ORP electrode, manual	
Options:		
Longer cable for ^{1) 2)} (available cable lengths: up to 5 m)		
Accessories:		
GRP 100 Art. no. 601424 ORP test solution (220 mV at 25 °C), 100 ml		

*) Note: cable GEAK-257-BNC or GEAK-557-BNC is needed for connection S7, for devices with cinch connection adapter GAD 1 BNC is necessary.
Electrodes are consumption objects. Lifetime under careful treatment: >2 years; warranty: 12 months

ELECTRODES - ACCESSORIES

Buffer capsules and buffer solutions:

GPH 4,0 / 5 Art. no. 602614
Buffer capsules (5 pieces), pH 4.0

GPH 4,0 / 10 Art. no. 602615
Buffer capsules (10 pieces), pH 4.0

GPH 7,0 / 5 Art. no. 602616
Buffer capsules (5 pieces), pH 7.0

GPH 7,0 / 10 Art. no. 602617
Buffer capsules (10 pieces), pH 7.0

GPH 10,0 / 5 Art. no. 602618
Buffer capsules (5 pieces), pH 10.0

GPH 10,0 / 10 Art. no. 602619
Buffer capsules (10 pieces), pH 10.0

GPH 12,0 / 5 Art. no. 602620
Buffer capsules (5 pieces), pH 12.0

GPH 12,0 / 10 Art. no. 602621
Buffer capsules (10 pieces), pH 12.0

All buffer capsules are traceable to NIST standards and have ±0.02 pH at 25 °C.

PHL 4 Art. no. 601369
ready-to-use buffer solution (pH 4.01 / 25 °C), 250 ml

PHL 7 Art. no. 601371
ready-to-use buffer solution (pH 7.00 / 25 °C), 250 ml

PHL 10 Art. no. 601373
ready-to-use buffer solution (pH 10.01 / 25 °C), 250 ml

KCL 3 M Art. no. 602477
3 mol KCL electrolyte for refilling and storage (fill into protective cap) of electrodes with 3 mol KCL electrolyte, injection bottle, 100 ml

CaCl Art. no. 603254
1000 ml, solution for measuring the pH value of soil

GRL 100 Art. no. 601422
Pepsin cleaning solution, 100 ml

Accessories and spare parts:

GEAK-257-BNC

Art. no. 601996
Adapter cable S7-BNC, 2 m

GEAK-557-BNC

Art. no. 601998
Adapterkabel S7-BNC, 5 m

VD120

Art. no. 601380
Pricker for insertion electrode GE 101



GAD 1 BNC

Art. no. 601382
Adapter to connect electrodes with Cinch plug to devices with BNC socket.

GPF 100

Art. no. 601417
Plastic wide mouth bottle, 100 ml

GAK 1400

Art. no. 603523
Working and calibration set; GPH 4.0, GPH 7.0, GPH 10.0 (5 capsules of each type); 3 x GPF 100; 1 x KCL3M; 1 x GRL 100

GWA12

Art. no. 602914
Thread adapter PG13.5 to G1", plastic



PG 13.5

Art. no. 603205
Plug-on thread adapter for pressure-less use, for any electrode



GWA 11 PG

Art. no. 605379
Thread adapter from PG11 external thread to PG 13.5 internal thread incl. sealing and PG11 counter nut, material: polyamide, fiber glass reinforced, O-ring: NBR, temperature range: -10 ... +100 °C



BENCH-TOP PH AND CONDUCTIVITY METER



HD-3456-2

Art. no. 700042

Bench-top pH and conductivity meter

General:

The HD-3456-2 is a bench top instrument for electrochemical measures: pH, conductivity and temperature. The displayed data can be stored (datalogger) and can be transferred to PC or serial printer. The storing and printing parameters can be set from menu. The HD-3456-2 measures pH, mV, redox potential (ORP), conductivity, resistivity in liquids, total dissolved solids (TDS), and salinity using combined 4-ring and 2-ring conductivity/temperature probes. Temperature is measured by Pt100 or Pt1000 immersion, penetration or contact probes.

Specifications:

Display ranges: pH, mV, χ , Ω , TDS, Sal, °C/°F measurement

Device

Dimensions: 55 x 120 x 220 mm (H x W x D)
Material: ABS, rubber
Display: 2 x 4½ characters plus symbols, visible area: 52 x 42 mm

Operating conditions

Working temperature: -5 ... +50 °C
Storage temperature: -25 ... +65 °C
Working relative humidity: 0 ... 90 % RH., without condensation
Protection degree: IP66

Power

Batteries: 3 batteries 1.5 V type AA
Autonomy (only batteries): 100 h with 1800 mAh alkaline batteries
Mains (cod. SWD-10): Output mains adapter 100 ... 240 V AC / 12 V DC-1A

Storage of measured values

Quantity: 20,000 terms of measures made up of [pH or mV], [χ or Ω or TDS or salinity] and temperature.

Connections

Serial interface and USB: 8-pole MiniDin connector, 1.1 ... 2.0 electrically isolated
Mains adapter (cod. SWD-10): 2-pole connector (positive at centre) 12 V DC/1 A

Connections

pH / mV input: Female BNC connector
Conductivity input: 8-pole male DIN45326 connector
Input for temperature probes: 8-pole male DIN45326 connector

Measurement of pH by instrument

Measuring range: -2.000 ... +19.999 pH
Resolution: 0.01 or 0.001 pH selectable from menu
Accuracy: ±0.001 pH ±1 digit

Automatic / manual temperature compensation: -50 ... +150 °C

Measurement of mV by instrument

Measuring range: -1.999.9 ... +1.999.9 mV
Resolution: 0.1 mV
Accuracy: ±0.1 mV ±1 digit

Standard solutions automatically detected (@25 °C): 1.679 pH – 2.000 pH – 4.000 pH – 4.008 pH – 4.010 pH – 6.860 pH – 6.865 pH – 7.000 pH – 7.413 pH – 7.648 pH – 9.180 pH – 9.210 pH – 10.010 pH

Measurement of conductivity by instrument

Measurement range (SPT-01G) (Kcell=0.1): 0.00 ... 19.99 μ S/cm, resolution 0.01 μ S/cm

HIGHLIGHTS:

- Primary water treatment
- Chemicals laboratories general use
- Water purification, water softening
- Multi-channel laboratory instrument

Measurement range (SP-T06-01G) (Kcell=1): 0.0 ... 199.9 μ S/cm, resolution 0.1 μ S/cm
 200 ... 1999 μ S/cm, resolution 1 μ S/cm
 2.00 ... 19.99 mS/cm, resolution 0.01 mS/cm
 20.0 ... 199.9 mS/cm, resolution 0.1 mS/cm

Accuracy (conductivity): ±0,5 % ±1 digit

Measurement of resistivity by instrument, resolution

Measurement range (Kcell=0.1): Up to 100 M Ω cm, resolution (*)

Measurement range (Kcell=1): 5.0 ... 199.9 Ω -cm, resolution 0.1 Ω -cm
 200 ... 999 Ω -cm, resolution 1 Ω -cm
 1.00 k ... 19.99 k Ω -cm, resolution 0.01 k Ω -cm
 20.0 k ... 99.9 k Ω -cm, resolution 0.1 k Ω -cm
 100 k ... 999 k Ω -cm, resolution 1 k Ω -cm
 1 ... 10 M Ω -cm, resolution 1 M Ω -cm

Accuracy (resistivity): ±0,5 % ±1 digit

Measurement of total dissolved solids (with coefficient χ /TDS=0.5)

Measurement range (Kcell=0.1): 0.00 ... 19.99 mg/l / 0.05 mg/l
Measurement range (Kcell=1): 0.0 ... 199.9 mg/l / 0.5 mg/l
 200 ... 1.999 mg/l / 1 mg/l
 2.00 ... 19.99 g/l / 0.01 g/l
 20.0 ... 99.9 g/l / 0.1 g/l

Accuracy (total dissolved solids): ±0,5 % ±1 digit

Measurement of salinity

Measuring range: 0.000 ... 1.999 g/l / 1 mg/l
 2.00 ... 19.99 g/l / 10 mg/l
 20.0 ... 199.9 g/l / 0.1 g/l

Accuracy (salinity): ±0,5 % ±1 digit

Automatic / manual temperature compensation: 0 ... 100 °C with α T that can be selected from 0.00 ... 4.00 %/°C

Reference temperature: 20 °C or 25 °C, selectable from menu

χ /TDS conversion factor: 0,4 ... 0,8

Cell constant K (cm⁻¹): 0.01 – 0.1 – 0.7 – 1.0 – 10.0

Standard solutions automatically detected (@25 °C): 1.413 μ S/cm

Measurement of temperature by instrument

Resolution: 0.1 °C
Accuracy: ±0.25 °C

Scope of supply: Instrument HD-3456-2, 3 x 1.5 V alkaline batteries, manual and DeltaLog9 version 2.0.

pH/mV electrodes, conductivity probes, oxygen sensor, temperature probes, standard reference solutions for different measurement types, connection cables for pH electrodes with S7 connector, cables for data download to PC or printer have to be ordered separately.

(*) The resistivity measurement is obtained from the reciprocal of conductivity measurement.

Accessories:

SP-06-T

Art. no. 700043

Conductivity and temperature probe, measuring range: 5 μ S/cm ... 200 mS/cm

SP-T01-G

Art. no. 700044

Conductivity and temperature probe, measuring range: 0.1 μ S/cm ... 500 μ S/cm

TP47-100

Art. no. 700045

PT100 without SICRAM module (DIN cl. AA), Ø 3 mm, length 230 mm, measuring range: -50 ... +250 °C

SWD-10

Art. no. 700039

Stabilized power supply at 100 ... 240 V AC/12 V DC/1 A mains voltage.

HD-22-3

Art. no. 700040

Freely positionable, flexible laboratory electrode holding arm. For probes with Ø 12 mm.

HD-2101-USB

Art. no. 700038

Connection cable USB 2.0 connector type A - 8-pole Mini Din for connection to PC with USB input.

HD-40-1

Art. no. 700056

Portable, serial input, 24 column thermal printer, 57 mm paper width, 4 NiMH 1.2 V rechargeable batteries, SWD-10 power supply, manual, 5 thermal paper rolls. Requires the cable HD-2110-CSNM (optional).

HD-2110-CSNM

Art. no. 700041

RS232C 8-pole MiniDin - 9-pole D Sub female null-modem cable for connecting the printer to instruments with MiniDIN connector (HD21xx.1 and HD21xx.2 series, HD34xx.2, HD98569, etc.).

WATERPROOF HANDHELD MEASURING DEVICE FOR MEASURING DISSOLVED OXYGEN IN WATER



HIGHLIGHTS

- Waterproof and durable (protective silicone case)
- Large double display with background lighting
- New oxygen sensor GWO 5610
- Environmental pressure compensation with integrated barometer

ADDITIONAL HIGHLIGHTS GMH 5650

- Data logger and alarm function
- Analogue output, pressure connection

ADDITIONAL FUNCTIONS - GMH 5650:



GMH 5630

Art. no. 606880

Waterproof dissolved O₂ handheld measuring device without accessories

GMH 5650

Art. no. 606882

Waterproof dissolved O₂ handheld measuring device without accessories with data logger and alarm

Application:

Oxygen monitoring in aquaculture and aquaria. Testing of well water, sewer systems and in wastewater treatment plants, also suitable for harsh environments. Delivery can take place ready for use (filled) or dry. Electrodes delivered try are long lasting and ready for use within about 1 h after filling.

Specifications:	GMH 5630	GMH 5650
Measuring channels:	O ₂ , T, air pressure (integrated)	O ₂ , T, air pressure (integrated) / measuring depth *1)

Measuring ranges

O₂-concentration:	0.00 ... 70.00 mg/l (ppm) (Variable resolution)
O₂-saturation:	0.0 ... 600.0 % O ₂ (Variable resolution)
O₂-partial pressure:	0 ... 1200 hPa O ₂ (0.0 ... 427.5 mmHg)
Temperature:	0.0 ... 50.0 °C
Air pressure:	10 ... 1200 hPa abs 300 ... 5000 hPa abs
Measuring depth:	- 0 ... 40.0 m water column *1)

Accuracy

Oxygen:	±1.5 % of m.v. ±0.2 mg/l (0 ... 25 mg/l) bzw. ±2.5 % of m.v. ±0.3 mg/l (25 ... 70 mg/l)
Temperature:	0.0 ... 50.0 °C
Air pressure:	10 ... 1200 hPa abs 300 ... 5000 hPa abs
Sensor:	GWO 5610, active diaphragm type with platinum cathode, Ø 12 mm, standard cable length 2 m, 7 pin bayonet connection
Response time:	90 % in 10 s
Service life:	approx. 3 years, depending on usage and care
Display:	4 ½ digit, 7-segment, illuminated (white)

Working temperature: Device: -25 ... +50 °C
Sensor: 0 ... 40 °C

Sensor operating pressure: max. 3 bar corresponds to max. 30 m water depth

Inward flow: min. 20 cm/s

Power supply: 2 x AAA battery, power consumption: 0.9 mA

Battery life: approx. 1000 h (without lighting)

Ingress protection: IP65 / IP67

Housing: Impact-resistant ABS, with stand/hanging bracket

Dimensions: 160 x 86 x 37 mm (H x W x D) including protective silicone case

Weight: approx. 250 g, including battery and protective case

Scope of supply: Device incl. batteries (2 x AAA), protective silicone case, calibration protocol, manual, quick guide

Additional Functions:

Salinity correction: 0.0 ... 70.0

Pabs / height correction: Automatic with integrated sensor

Measuring depth (only GMH 5650): Hydrostatic depth measurement *1)

Output / external supply: OUT jack: 38400 baud interface, 5 V external supply

Additional with GMH 5650: Analogue output 0 ... 1 V, adjustable

Calibration: 1 point air, easy calibration to air at the push of a button

Additional with GMH 5650: 1 point water, 2 point or 3 point (air and zero point and 100 % O₂)

GLP: Calibration interval

Additional with GMH 5650: Calibration history

Data logger (only GMH 5650): Cyclical: 10,000, Single: 1000, single value logger with measuring point input

Alarm (only GMH 5650): 2 alarm channels (O₂ and temperature) with separate alarm thresholds alarm notification horn / visual / interface

*1) A simple hydrostatic depth measurement can be made with special accessories. For instance, oxygen profiles in waste water can be recorded very conveniently together with the logger function.



HIGHLIGHTS:

- Significantly lower inward flow required than with the predecessor model
- Dry storage possible for long-term storage needs
- Compact 12 mm diameter retained!

GWO 5610-L02

Art. no. 607386

Dissolved oxygen sensor with 2 m cable

General:

Standard, for laboratory use, electrode is delivered filled, dry delivery available on request

Accessories and spare parts:

GWO 5610-L04

Art. no. 607764

Spare sensor GWO 5610 with 4 m cable (field use)

GWO 5610-L10

Art. no. 607765

Spare sensor GWO 5610 with 10 m cable (field use)

GWO 5610-L30

Art. no. 607766

Spare sensor GWO 5610 with 30 m cable (field use)

GSKA 3600

Art. no. 601414

Protective PVC cap, submerged, for use in still bodies of water

GSKA 3610

Art. no. 607267

Protective cap made of gunmetal, salt water resistant, submerged, also suitable for use with greater depths or with a flow

GWOK 02

Art. no. 608012

Spare membrane cap

GAS 5610

Art. no. 608032

Work set (3 spare membrane caps, 100 ml of electrolyte)

TMV 3600

Art. no. 608824

Depth measuring device

KOH 100

Art. no. 603356

Spare electrolyte, 100 ml

GCAL 3610

Art. no. 611371

Calibration bottle



MEASUREMENT SET FOR DISSOLVED OXYGEN



SET-GMH 5650

Art. no. 611255

Measurement set for dissolved oxygen

General:

With our ready-to-use measurement set for dissolved oxygen, you have everything you need for your work in a practical case and with the set price, you save 13 % in comparison with the prices for the individual components

Application:

No matter which sector you work in, our comprehensive SET-GMH 5650 never lets you down and stows away in the tidy practical case

Specifications:

Measuring channels: O₂, T, air pressure (integrated) / measuring depth *1)

Measuring range:

O₂-concentration: 0.00 ... 70.00 mg/l (ppm) (Variable resolution)

O₂-saturation: 0.0 ... 600.0 % O₂ (Variable resolution)

O₂-partial pressure: 0 ... 1200 hPa O₂ (0.0 ... 427.5 mmHg)

Temperature: 0.0 ... 50.0 °C

Air pressure: 300 ... 5000 hPa abs

Measuring depth: 0 ... 40.0 m water column *

Dimensions: 450 x 360 x 123 mm (case)

Weight: approx. 1900 g

Scope of supply: Device incl. protective silicone case, sensor, protective cap, software, interface converter, spare membrane cap, spare electrolyte, case, battery, calibration protocol, manuals

Accessories and spare parts:

GMH 5650

Art. no. 606882

Waterproof dissolved O₂ handheld measuring device without accessories with data logger and alarm

GWO 5610-L02

Art. no. 607386

Dissolved oxygen sensor with 2 m cable

GSKA 3610

Art. no. 607267

Protective cap made of gunmetal, salt water resistant, submerged, also suitable for use with greater depths or with a flow

GSOFT 3050

Art. no. 601336

Windows-software for handheld instruments with logger (p.r.t. page 109)

USB 5100

Art. no. 601095

galvanically isolated interface converter with device power supply via USB

GWOK 02

Art. no. 608012

Spare membrane cap

KOH 100

Art. no. 603356

Spare electrolyte, 100 ml

GKK 3700

Art. no. 601064

Case with nap foam for universal application (450 x 360 x 123 mm)

HANDHELD MEASURING DEVICE SETS



GMH 5630-L02

Art. no. 607470
Waterproof dissolved O₂ handheld measuring device, including sensor GWO 5610, 2 m cable

GMH 5650-L02

Art. no. 607474
Waterproof dissolved O₂ handheld measuring device, including sensor GWO 5610, 2 m cable, with data logger and alarm

Varianten:
GMH 5630-L04 Art. no. 606881 GMH 5630 handheld measuring device with sensor with 4 m cable length
GMH 5630-L10 Art. no. 607471 GMH 5630 handheld measuring device with sensor with 10 m cable length
GMH 5630-L30 Art. no. 607472 GMH 5630 handheld measuring device with sensor with 30 m cable length
GMH 5650-L04 Art. no. 606883 GMH 5650 handheld measuring device with sensor with 4 m cable length
GMH 5650-L10 Art. no. 607478 GMH 5650 handheld measuring device with sensor with 10 m cable length
GMH 5650-L30 Art. no. 607479 GMH 5650 handheld measuring device with sensor with 30 m cable length

Accessories and spare parts:
GKK 5001 Art. no. 611606 with cut-outs for 1 device of the GMH 5xxx-/7500 series and accessories for water analysis (395 x 295 x 106 mm)
GKK 5240 Art. no. 602068 Durable case, suitable for universal applications with individual configuration of the foam insert, pressure equalisation possible, waterproof. Dimensions: 520 x 415 x 200 mm



OXYGEN MEASURING DEVICE



READY-TO-USE

GOX 20

Art. no. 600126
Oxygen measuring device, operative, incl. oxygen probe and battery

Specifications:	
Measuring range	
Temperature:	0.0 ... 40.0 °C
Oxygen:	0.0 ... 20.0 mg/l O ₂
Resolution	
Temperature:	0.1 °C
Oxygen:	0.1 mg/l O ₂
Accuracy (at nominal temperature = 25 °C) ±1 digit	
Temperature:	±0.3 °C (in range 0 ... 30 °C)
Oxygen:	±2 % of m.w. ±0.2 mg/l
Electrode:	active diaphragm type. Electrode-Ø front: approx. 12 mm, length: approx. 170 mm, connecting cable approx. 2 m permanently connected to device.
Response time:	95 % in 10 s, depending on temperature
Operation life:	approx. 3 years or more depending on maintenance
Operation pressure:	max. 3 bar
Temperature compensation:	automatically via temperature sensor integrated in electrode
Calibration:	simple quick-calibration in atmospheric air
Display:	3½-digit LCD display, 13 mm high
Working temperature:	0 ... 50 °C
Power supply:	9 V battery
Battery life:	approx. 300 h
Housing:	impact-resistant ABS housing
Dimensions:	106 x 67 x 30 mm (H x W x D)
Weight:	approx. 250 g (ready for use)
Scope of supply:	device incl. electrode, battery, GWOK01 and KOH electrolyte, manual

Accessories and spare parts:
GWOK 01 Art. no. 601411 Spare diaphragm head
KOH 100 Art. no. 603356 Spare electrolyte 100 ml
GSKA 3610 Art. no. 607267 Protective cap made of gunmetal, salt water resistant, submerged, also suitable for use with greater depths or with a flow

PRECISE DISSOLVED OXYGEN MEASURING DEVICES (DO)



DURABLE AND AFFORDABLE

HIGHLIGHTS:

- Modern and functional housing
- 3-line display / overhead display at the push of a button
- Backlighting
- Waterproof (IP65 / IP67)
- Durable, long battery life
- Including galvanic oxygen sensor
- Easy calibration to air at the push of a button

G 1610

Art. no. 610003

Waterproof dissolved oxygen measuring device (DO) with sensor, 2 m cable

G 1610-4

Art. no. 408380

Waterproof dissolved oxygen measuring device (DO) with sensor, 4 m cable

General:

The primary focus in the development of the new GMH 1000 series was place on the essential functions of the measurement technology. Pure measurement with a focus on precision, speed and reliability packaged in a compact housing distinguish an impressive price/performance ratio, Made in Germany.

The new handheld measuring devices also impress with their ergonomic design, dust and water-protected design in accordance with IP 65/67 and the illuminated display.

The Oxymeter with maintenance-friendly galvanised sensor is an entry-level device suitable for everyday use. Concentrations in mg/l(ppm) and saturation in percentage can be read directly without using tables.

Calibration with environmental air takes place at the push of a button. Use of a GSKA protective cap is recommended for field use in bodies of water in order to protect the membrane.

Application:

Freshwater and salt water aquariums, aquaculture/fish breeding, monitoring of wells and bodies of water

Specifications:

Measuring range / Resolution:	0.0 ... 20.0 mg/l (or ppm) O ₂ concentration 0 ... 200 % O ₂ saturation
Accuracy	
Oxygen:	±1,5 % of m.v. ±0.2 mg/l or ±1,5 % of m.v. ±2 % O ₂ saturation
Temperature:	±0.3 °C
Sensors / measuring inputs:	Galvanic sensor (active membrane type), KOH electrolyte 2 m or 4 m cable, permanently connected to the device, with integrated temperature sensor
Response time T₉₅:	10 s at nominal temperature
Operating pressure:	max. 3 bar (~30 m water depth)
Sensor range of application:	0 ... 40 °C
Compensation	
Temperature:	automatic with integrated temperature measurement
Air pressure:	Compensation possible with manual input (normally not necessary)
Salinity:	with manual entry
Display:	3-line unit with battery status indicator, background light, protected by an unbreakable pane, overhead display at the push of a button
Operation:	4 long-lasting, easy-to-operate buttons

Additional functions:	stability recognition, automatic adjustment to environmental air
Display unit environment:	-20 ... +50 °C, 0 ... 95 % RH
Power supply:	2 x AA battery, battery life >3000 h
Protection rating:	IP65 / IP67
Housing:	Break-proof ABS housing
Dimensions:	108 x 54 x 28 mm (H x W x D) without sensor
Weight:	240 g (device incl. sensor)
Scope of supply:	Device, sensor, GWOK 02 spare membrane cap and KOH 100 spare electrolyte, 2 x battery, manual

Accessories and spare parts:

GWOK 02

Art. no. 608012

Spare membrane cap

KOH 100

Art. no. 603356

Spare electrolyte 100 ml

GSKA 3600

Art. no. 601414

PVC protective cap, submerged, for use in still bodies of water

GSKA 3610

Art. no. 607267

Red brass protective cap, salt water resistant, submerged, also suitable for use with greater depths or with a flow

GCAL 3610

Art. no. 611371

Kalibrierflasche

ST-G1000

Art. no. 611373

Device protection bag with 1 round cut-out

GB AA

Art.-Nr. 610049

Spare battery AA (2 batteries required)

GSKA 3600 mounted on the sensor



OXYGEN MEASURING DEVICES FOR DISSOLVED OXYGEN IN LIQUIDS



HIGHLIGHTS:

- Automatic air pressure compensation
- Salinity correction
- Simple calibration in atmospheric air

ADDITIONAL FUNCTIONS GMH 3651:



MEAS. UNITS: O₂-CONCENTRATION O₂-SATURATION
AND O₂-PARTIAL PRESSURE (GMH3651 ONLY)

GMH 3611

Art. no. 605922

Oxygen measuring device incl. oxygen electrode, with 4 m cable

GMH 3651

Art. no. 605924

Oxygen measuring device incl. oxygen electrode with data logger, with 4 m cable

Specifications:

Measuring range: (device)

O₂-concentration: 0.00 ... 70.00 mg/l (ppm) (resolution selectable)

O₂-saturation: 0.0 ... 600.0 % O₂ (resolution selectable)

O₂-partial pressure: 3651: 0 ... 1200 hPa O₂ (0.0 ... 427.5 mmHg)

Temperature: 0.0 ... 50.0 °C

Pressure: 3611: 10 ... 1200 hPa abs.
3651: 300 ... 5000 hPa abs. or
0 ... 100.0 m water column*
(with pressure port)

Accuracy: (at nominal temperature = 25 °C)

Oxygen: ±1.5 % of m.v. ±0.2 mg/l
(0 ... 25 mg/l) or
±2.5 % of m.v. ±0.3 mg/l
(25 ... 70 mg/l)

Temperature: ±0.1 °C ±1 digit

Pressure: ±0.5 % FS ±1 digit
±3 hPa or 0.1 % of m.v.
±2 hPa (750 ... 1100 hPa)

Sensor connection: 6-pin screened Mini-DIN-socket

Sensor: Active membrane type.
Electrode-Ø front: approx. 12 mm,
overall length: approx. 220 mm,
anti buckling glanding, neck collar:
Ø approx. 20 mm, 4 m connection
cable with Mini-DIN-plug

Response time: 95 % in 10 s, depends on temperature

Operation life: approx. 3 years, depends on maintenance

Working temperature: 0 ... +40 °C

Working pressure: max. 3 bar
Operating pressure sensor GWO
3600 max. 3000 hPa rel. or 4000
hPa pay attention to abs.!

Flow rate: min. 30 cm/s

Display: 2 x 4 digit LCDs (12.4 / 7 mm high)

Interface:

serial interface, direct connection to RS232 or USB interface of a PC via electrically isolated interface converter.

Power supply:

9 V-battery as well as additional d.c. connector for external 10.5-12 V direct voltage supply. (suitable power pack: GNG10/3000)

Battery life:

approx. 500 h

Housing:

impact-resistant ABS, integrated pop-up clip for table top or suspended use.

Dimensions:

142 x 71 x 26 mm (H x W x D)

Weight:

approx. 300 g (incl. battery and probe)

Scope of supply:

Device incl. electrode, GWOK01 and KOH electrolyte, battery, manual

Additional functions:

Temperature compensation:

automatic via temperature sensor integrated in electrode.

Air pressure compensation:

automatic via integrated pressure sensor. Display of current air pressure.

Correction of salinity:

autom. salinity value can be set via keyboard from 0.0 ... 70.0

Calibration:

1-point calibration: extremely simple quick calibration in atmospheric air.

GMH 3651: additional calibration history

Calibration interval:

The device asks for a recalibration after a selectable time period (1 - 365 days or inactive).
GMH 3651: additional calibration history

Analog output (GMH 3651 only):

0 ... 1 V, freely adjustable

Alarm (GMH 3651 only):

2 Alarm (O₂ and temperature) with separate alarm limits, Alarm horn / visual / interface

Data logger (GMH 3651 only):

cyclic: 10.000 data sets, manual: 1.000 data sets (with measuring point input, 40 adjustable measuring point texts or measuring point numbers)

* There is the possibility for hydrostatic depth measurements with special accessories (upon request / pressure connection). This allows in combination with the logger function e.g. comfortable recordings of oxygen profiles in waters.

Variants:

GMH 3611-L10

Art. no. 606233

Device GMH 3611 with sensor with 10 m cable length

GMH 3611-L30

Art. no. 607086

Device GMH 3611 with sensor with 30 m cable length

GMH 3651-L10

Art. no. 606105

Device GMH 3651 with sensor with 10 m cable length

GMH 3651-L30

Art. no. 606106

Device GMH 3651 with sensor with 30 m cable length

Accessories and spare parts:

GMH 3611-GL

Art. no. 606310

Oxygen measuring device without accessories

GMH 3651-GL

Art. no. 606312

Oxygen measuring device without accessories

GWO 3600-L04

Art. no. 603895

Spare sensor with 4 m cable

GWO 3600-L10

Art. no. 603258

Spare sensor with 10 m cable

GWO 3600-L30

Art. no. 603259

Spare sensor with 30 m cable

GWOK 01

Art. no. 601411

Spare diaphragm head

GAS 3600

Art. no. 603497

Working set (consisting of 3 spare diaphragm heads and 100 ml KOH-electrolyte)

GSKA 3600

Art. no. 601414

Protective PVC cap, submerged, for use in still bodies of water

GSKA 3610

Art. no. 607267

Protective cap made of gunmetal, salt water resistant, submerged, also suitable for use with greater depths or with a flow

KOH 100

Art. no. 603356

Spare electrolyte 100 ml

GCAL 3610

Art. no. 611371

Calibration bottle



BENCH-TOP DISSOLVED OXYGEN METER



HIGHLIGHTS:

- Primary water treatment
- Laboratory instrument
- Integrated pressure sensor (automatic compensation)
- Rapid calibration function for the O₂ probe

HD-3409-2

Art. no. 700034

Bench-top dissolved oxygen meter

General:

The HD-3409-2 is a bench top instrument for electrochemical measures: dissolved oxygen and temperature. The displayed data can be stored (datalogger) and can be transferred to PC or serial printer. The storing and printing parameters can be set from menu. The HD-3409-2 measures the concentration (in mg/l) of dissolved Oxygen in liquids, the saturation index (in %) and the temperature. Thanks to an internal pressure sensor, the instruments automatically compensate for barometric pressure.

Specifications basic device: (Please note probe specifications)

Display ranges: mg/l O₂, %O₂, mbar, °C / °F measurement

Instrument

Dimensions: 55 x 120 x 220 mm (H x W x D)
Materials: ABS, rubber
Display: 2 x 4½ characters plus symbols, visible area: 52 x 42 mm

Operating conditions

Working temperature: -5 ... +50 °C
Storage temperature: -25 ... +65 °C
Working relative humidity: 0 ... 90 % RH. without condensation
Protection degree: IP66

Power

Batteries: 3 batteries 1.5 V type AA
Autonomy (only batteries): 100 h with 1800 mAh alkaline batteries
Mains (cod. SWD-10): Output mains adapter 100 ... 240 V AC / 12 V DC-1A

Storage of the measured values

Quantity: 18.000 measures made up of the four parameters mg/l O₂, % O₂, mbar, [°C or °F]

Connections

Serial interface and USB: 8-pole MiniDin connector, 1.1 - 2.0 electrically isolated
Mains adapter (cod. SWD-10) 2-pole connector (positive at centre) 12 V DC/1A

Measurement connections

Input for oxygen probes: 8-pole male DIN45326 connector
Input for temperature probes with SICRAM module or TP47 module: 8-pole male DIN45326 connector

Measurement of the concentration of dissolved oxygen

Measuring range: 0.00 ... 90.00 mg/l
Resolution: 0.01 mg/l
Accuracy: ±0.03 mg/l ±1 digit (0 ... 90 % RH, 1013 mbar, 20 ... 25 °C)

Measurement of the saturation index of dissolved oxygen

Measuring range: 0.0 ... 600.0 %
Resolution: 0.1 %
Accuracy: ±0.3 % ±1 digit (in range of 0.0 ... 199.9 %)
 ±1 % ±1 digit (in range of 200.0 ... 600.0 %)

Automatic temperature compensation: 0 ... 50 °C

Measurement of barometric pressure

Measuring range: 0,0 ... 1.100,0 mbar
Resolution: 0.1 mbar
Accuracy: ±2 mbar ±1 digit between 18 ... 25 °C

Salinity setting

Setting range: 0.0 ... 70.0 g/l
Resolution: 0.1 g/l

Temperature measurement with the sensor inside the dissolved oxygen probe

Measuring range: 0.0 ... 45.0 °C
Resolution: 0.1 °C
Accuracy: ±0.1 °C ±1 digit (device), additional error by sensor: ±1 % FS

Scope of supply: Instrument HD-3409-2, calibrator HD9709/20 (for polarographic probe) or DO9709/21 (for galvanic probe), 3 1.5 V alkaline batteries, operating manual and DeltaLog9.

Dissolved oxygen probes, temperature probes, standard reference solutions, connection cables, cables for data download to PC or printer have to be ordered separately.

Accessories:

DO9709-SS-0-0

Art. no. 700035

Polarographic combined oxygen and temperature probe, incl. 2 membranes, electrolyte and zero point solution, cable length 2 m

DO9709-SS-1

Art. no. 700036

Galvanic oxygen and temperature probe, incl. 2 membranes, electrolyte and zero point solution, cable length 2 m

DO9709-SS-1-5

Art. no. 700037

Galvanic oxygen and temperature probe, incl. 2 membranes, electrolyte and zero point solution, cable length 5 m

HD2101-USB

Art. no. 700038

Connection cable USB 2.0 connector type A - 8-pole Mini Din for connection to PC with USB input.

SWD-10

Art. no. 700039

Stabilized power supply at 100 ... 240 V AC/12 V DC/1 A mains voltage.

HD-22-3

Art. no. 700040

Laboratory electrode holder with metal basis plate. Flexible electrode holder for free positioning. For Ø 12 mm probes. (see picture)

HD-40-1

Art. no. 700056

Portable, serial input, 24 column thermal printer, 57 mm paper width, 4 NiMH 1.2 V rechargeable batteries, SWD-10 power supply, instruction manual, 5 thermal paper rolls. Requires the cable HD-2110-CSNM (optional).

HD-2110-CSNM

Art. no. 700041

RS232C 8-pole MiniDin - 9-pole D Sub female null-modem cable for connecting the printer to instruments with MiniDIN connector.

GAS ANALYSIS



GMH 5690



GMH 5695

GMH 3692
+SensorGMH 3695
+Sensor

ResOx



GOX 100



GOX 100T



GCO 100



HD21-ABE-17

APPLICATION:

Measurement of atmospheric oxygen

•

•

•

•

•

•

•

•

O₂-concentration (oxygen)

•

•

•

•

•

•

•

Temperature, atmospheric pressure, relative humidity

•

O₂-partial pressure

•

•

•

•

•

CO-concentration (carbon monoxide)

•

•

Protective gases

•

•

•

•

•

Diving *

•

•

•

•

Exhaust gas monitoring

•

•

EQUIPMENT:

Measuring ranges

O₂-concentration
O₂-partial pressure
Temperature
Ambient pressure

0 ... 100 %
0 ... 1100 hPa
-5 ... +50 °C

10 ... 1200 hPa 300 ... 5000 hPa

0 ... 100 %
0 ... 1100 hPa
-5 ... +50 °C

10 ... 1200 hPa 300 ... 5000 hPa

0 ... 100 %
0 ... 1100 hPa
-5 ... +50 °C

300 ... 5000 hPa

0 ... 100 %

CO₂:
CO-concentration
0 ... 1000 ppm
0 ... 1250 mg/m³
0 ... 60 % COHb

CO₂:
0 ... 5.000 ppm
CO: 0 ... 500 ppm
Atmospheric pressure (Patm):
750 ... 1.100 hPa
Rel. humidity (RH):
0 ... 100 % RH
T: -20 ... +60 °C

Electrode / sensor

external sensor, order separately

external sensor, order separately

complete set

in external sensor housing

Internal sensor

Internal sensor

Sensor connection

7-pol. Bajonett

6-pole mini-DIN socket

7-pol. Bajonett

0.7 m cable with jack plug

-

-

General functions

Min/Max, Hold, Auto-Off
Background illumination

•

•

Set with gas pump

•

•

MOD display

Max, Hold, Auto-Off

•

Alarm / Interface

•

•

•

•

•

•

•

Logger

•

•

•

•

DEVICE INFORMATION:

Catalogue page

Page 75

Page 75

Page 76

Page 76

Page 79

Page 78

Page 78

Page 80

Page 81

WATERPROOF HANDHELD MEASURING DEVICE



HIGHLIGHTS

- High display resolution (0.01 % O₂ concentration)
- Waterproof and durable (protective silicone case)
- Large double display with background lighting
- Multi-point calibration for precision measurements
- Environmental pressure compensation with integrated barometer
- Alarm function

ADDITIONAL HIGHLIGHTS GHM 5695

- Data logger
- Analogue output
- Pressure connection

ADDITIONAL FUNCTIONS GHM 5695:



SUITABLE SENSORS
SEE PAGE 77

THE DEVICE IS ONLY INTENDED FOR CONTROL.
IT IS NOT A REPLACEMENT FOR A MONITORING
DEVICE SUBJECT TO AUTHORISATION!

GMH 5690

Art. no. 607466

Waterproof air oxygen measuring device without sensor

GMH 5695

Art. no. 607468

Waterproof air oxygen measuring device without sensor with data logger and alarm

Application:

- Protective gas measurements for
 - Welding and soldering
 - Food production/packaging technology (MAP, see also the Resox 5695-H/-L)
 - For storage of foods, semiconductor components, etc.
 - Immersion gas testing: Checking of oxygen concentration in nitrox, trimix or similar gas compositions

Note: Not suitable for use in 'underwater applications' (rebreather, etc.)

Specifications:	GMH 5690	GMH 5695
Measuring channels:	O ₂ , T, air pressure (integrated)	O ₂ , T, air pressure (integrated, with external connection)
Measuring ranges		
O₂ concentration:	0.0 ... 100.0 % O ₂ Vol. or 0.00 ... 100.00 % O ₂ Vol. (resolution can be selected in menu)	
O₂ partial pressure:	0 ... 1100 hPa O ₂ / 0 ... 825 mmHg O ₂ . 0.0 ... 1100.0 hPa O ₂ / 0.0 ... 825.0 mmHg O ₂ (resolution can be selected in menu)	
Temperature:	-5.0 ... +50.0 °C	
Air pressure:	10 ... 1200 hPa abs	300 ... 5000 hPa abs *)
Accuracy: (device at nominal temperature = 25 °C)		
O₂ concentration:	±0.1 % ±1 digit	
Temperature:	±0.1 °C ±1 digit	
Air pressure:	±3 hPa or 0.1 % of m.w. (higher applies)	
Compatible sensors:	GGO5 / GOO5 with elements GOEL 370, 381 etc.	GGA5 / GGO5 / GOO5 with elements GOEL 370, 381 etc.
Connections		
Sensor:	7-pin bayonet connection	7-pin bayonet connection Port for pressure connection *)
Output / ext. Power supply:	OUT jack: - 38400 baud interface - 5 V external supply	OUT jack: - 38400 baud interface - Analogue output 0 ... 1 V, adjustable - 5 V external supply
Display:	4 ½ digit, 7-segment, illuminated (white)	
Operating conditions:	-25 ... +50 °C; 0 ... 95 % RH (non-condensing, sensor min. -5 °C)	
Power supply:	2 x AAA battery, power consumption: 0.9 mA	
Battery life:	approx. 1000 h (without lighting)	

Ingress protection:	IP65 / IP67
Housing:	Impact-resistant ABS, with stand/hanging bracket
Dimensions:	160 x 86 x 37 mm (H x W x D) including protective silicone case
Weight:	approx. 250 g, including battery and protective case
Scope of supply:	Handheld measuring device incl. batteries (2xAAA), protective silicone case, manual, quick guide

*) Optimal air pressure compensation with GGA 570 /GGA 580

Additional functions:	
Backlighting:	Adjustable light duration (off, 5 s ... 2 min.)
Calibration:	1 point air, 2 point or 3 point (air and zero point and 100 % O ₂)
GLP:	Calibration interval
GMH 5695 only:	Calibration history
Data logger (GMH 5695 only):	Cyclical: 10,000, Single: 1000 Single value logger with measuring point input
Alarm:	2 alarm channels (O ₂ and temperature) with separate alarm thresholds Alarm notification horn/visual/interface
Accessories and spare parts:	
See page 77/78 for matching sensors	
GKK 3600	
Art. no. 601062	Case with napped foam for universal application (394 x 294 x 106 mm)
USB 5100	
Art. no. 601095	Interface converter GMH 5xxx <=> PC
GSOFT 3050	
Art. no. 601336	Windows software for GMBH 3000 and GMH 5000 handheld measuring devices with logger function

AIR OXYGEN MEASURING DEVICE



WIDE RANGE OF APPLICATION

HIGHLIGHTS:

- Alarm detector with integrated horn
- Automatic compensation of ambient air via integrated barometer

ADDITIONAL FUNCTIONS GMH 3695:

- pressure connection

SUITABLE SENSORS
SEE PAGE 77THE DEVICE IS ONLY INTENDED FOR CONTROL.
IT IS NOT A REPLACEMENT FOR A MONITORING DEVICE SUBJECT TO AUTHORISATION!

GMH 3692

Art. no. 605919

Air oxygen measuring device w/o sensor

GMH 3695

Art. no. 605921

Air oxygen measuring device w/o sensor with data logger

Application:

Bio chemistry:

Oxygen monitoring in breeding chambers for cell cultures. Monitoring of fermenting process of fruits in fermentation plants etc.

Medicine:

Monitoring of oxygen concentration in respirators; checking of breathing, monitoring of oxygen concentration in incubators, oxygen tents etc.

Food technology:

Monitoring of residual oxygen in packages (e.g. coffee, tea, etc.).
Monitoring of oxygen content during production processes.

Air conditioning and ventilation technology:

Oxygen measurements, air quality monitoring, measuring of oxygen concentration in enclosed air conditioning systems, etc.

Sport:

Checking of oxygen content in compressed air bottles (diving, etc.).

Note:

not suited for „under water“-applications (rebreather, etc.)

Specifications:

Measuring ranges

Oxygen concentration: 0.0 ... 100.0 % O₂ (gaseous)
0 ... 1100 hPa O₂

Temperature: -5.0 ... +50.0 °C

Air pressure: GMH 3692: 10 ... 1200 hPa
GMH 3695: 300 ... 5000 hPa

Accuracy: (device) (at nominal temperature = 25 °C)

Oxygen concentration: ±0.1 % ±1 digit

Temperature: ±0.1 °C ±1 digit

Air pressure: ±3 hPa or 0.1 % v. m.w. (whichever is higher)

Oxygen sensor: for suitable sensores p.r.t. page 77
Observe permissible operating pressure of oxygen sensor
e.g. GOEL 370/381: 500 ... 2000 hPa abs.

Sensor connection: 6-pin screened Mini-DIN-socket.
GMH 3695: additional pressure ports

Display: two 4 digit LCDs (12.4 mm or 7 mm high), as well as additional arrows.

Pushbuttons: 6 membrane keys for ON/OFF-switch, selection of meas. range, min- and max- value memory, hold-function, calibration etc.

Working temperature: 0 ... +50 °C

Relative humidity: 0 ... +95 % RH (non condensing)

Storage temperature: -20 ... +70 °C

Interface: serial interface, direct connection to RS232 or USB interface of a PC via electrically isolated interface converter GRS 3100 or GRS 3105 resp. USB 3100 N (p.r.t. accessories).

Power supply: 9 V battery as well as additional d.c. connector for external 10.5 ... 12 V direct voltage supply. (suitable power supply: GNG10/3000)

Battery life: approx. 300 h

Housing: Impact-resistant ABS plastic housing, membrane keyboard, transparent panel, integrated pop-up clip

Dimensions: 142 x 71 x 26 mm (H x W x D)

Weight: approx. 160 g (incl. battery)

Scope of supply: Device, battery, calibration protocol, manual

Additional functions:

Temperature compensation: automatic via temperature sensor, integrated in probe housing

Air pressure compensation: The O₂ concentration will be compensated according to the absolute atmospheric pressure set.

Calibration:

1-point calibration: extremely simple quick calibration in atmospheric air. (press button to compensate unit to 20.9 %).

2-/3-point calibration: first point at atmospheric air (20.9 %), second and third point 0 or 100 %.

Calibration interval: The device asks for a recalibration after a selectable time period (1 ... 365 days or inactive). GMH 3695: additional calibration history

Analog output (GMH 3695 only): 0 ... 1 V, freely scalable

Pressure nozzles (GMH 3695 only): for pressure compensation

Data logger (GMH 3695 only):

cyclic: 8000 data sets, adjustable cycle time: 1 s ... 60 min
manual: 1000 data sets, with measuring point input

Accessories and spare parts:

Suitable sensors

p.r.t. next page

GKK 3000

Art. no. 601048

Case (275 x 229 x 83 mm) with punched lining suitable for GMH3xxx

USB 3100 N

Art. no. 601092

Interface converter, electrical isolated

GRS 3105

Art. no. 601099

Interface converter with 5 connection points, electrical isolated, for the connection of 5 devices to one PC (RS232).

GSOFT 3050

Art. no. 601336

Windows software for GMH 3000 and GMH 5000 handheld measuring devices with logger function

ST-R1

Art. no. 601066

Device protection bag with cut-out for probe connection

ATMOSPHERIC OXYGEN SENSORES FOR GMH 569X AND GMH 369X

CLOSED SENSOR TYPE GGO



CLOSED

**GGO 581**

Art. no. 610029

For low oxygen concentrations, suitable for GMH 569x

GGO 570

Art. no. 607480

Universal application, diving gas, longlife, suitable for GMH 569x

GGO 381

Art. no. 610030

For low oxygen concentrations, suitable for GMH 369x

GGO 370

Art. no. 601224

Universal applications, diving, longlife, suitable for GMH 369x

General:

- suitable for under and over pressure
- for using in gas-tight systems

Application:

Suitable for measuring in normal atmosphere and in systems without or with slight under or over pressure. The sensor type features a screw thread and can be built in gas-tight in almost every system directly resp. with tube-adaptor.

longer cable length 4 m and 10 m on demand

CLOSED SENSOR TYPE WITH PRESSURE CONNECTION GGA

FOR DEVICES WITH
PRESSURE CONNECTION**GGA 581**

Art. no. 610031

For low oxygen concentrations, with pressure connection, suitable for GMH 569x

GGA 570

Art. no. 607486

Universal application, diving gas, longlife, with pressure connection, suitable for GMH 569x

GGA 381

Art. no. 610032

For low oxygen concentrations, with pressure connection, suitable for GMH 369x

GGA 370

Art. no. 607484

Universal application, diving gas, longlife, with pressure connection, suitable for GMH 369x

General:

For devices with external pressure port (GMH 5695 / 3695) is this housing optimal. Especially for systems with high or low pressure or with existing back pressure by flow.

Application:

It can be screwed airtight (Attention: Observe permissible operating pressure!). The device-pressure port is connected to the sensor pressure port. The device measures and compensates for the actual pressure at the sensor.

longer cable length 4 m and 10 m on demand

OPEN SENSOR TYPE GOO



OPEN

**GOO 581**

Art. no. 610033

For low oxygen concentrations, suitable for GMH 569x

GOO 570

Art. no. 607482

Universal application, diving gas, longlife, suitable for GMH 569x

GOO 381

Art. no. 610034

for low oxygen-concentration, suitable for GMH 369x

GOO 370

Art. no. 601228

universal applications, diving, longlife, suitable for GMH 369x

General:

- suitable for air- or gas-stream
- quick temperature compensation

Application:

Because of the special sensor construction the measuring gas streams optimally around the sensor and escapes through holes in the housing into the air. No pressure build-up at slight streaming of the probe, that falsify the result of measurement. Particularly suitable for measuring of gas out of gas-bottle etc. Even measuring indoor-gas concentration is possible.

longer cable length 4 m and 10 m on demand

Specifications:	GGA/GGO/GOO 570/370	GGA/GGO/GOO 581/381
Sensor element:	GOEL 370	GOEL 381
	Oxygen-partial pressure probe, mounted in external sensor housing replaceable (temperature sensor mounted in housing)	
Specific features:	Long service life For protective gases with a high O ₂ concentration and oxygen content <35 vol.% O ₂	for the lowest O ₂ concentrations For protective gases, in general, precise and very small measurements and above 35 vol.% O ₂
Measuring range:		
Partial oxygen pressure:	0 ... 1100 hPa O ₂	0 ... 1100 hPa O ₂
Oxygen concentration:	0.0 ... 100.0 % O ₂	0.0 ... 100.0 % O ₂
Response time: T₉₀	<10 s	<10 s
Accuracy (at 25 °C, 1013 hPa)		<1.5 % O ₂
<2 % O ₂	±0.2 % O ₂	±0.1 % O ₂
<25 % O ₂	±0.5 % O ₂	±0.5 % O ₂
>25 % O ₂	±0.5 % O ₂	no information
Operating conditions:	0 ... 45 °C 0 ... 95 % RH (non condensing)	0 ... 45 °C 0 ... 95 % RH (non condensing)
Ambient pressure:	0.6 ... 1.75 bar abs.	
Over-/under-pressure:	max. 0.25 bar (pressure difference sensor membrane to ambient - sensor screwed-in)	
Storage temperature:	-15 ... +60 °C	
Operation life:	on air: >4 years (warranty for sensor element: 12 months)	on air: >2 years (warranty for sensor element: 12 months)
Connection:	GGA/GGO/GOO 3...: approx. 1.2 m cable with Mini-DIN-plug. GGA/GGO/GOO 5...: approx. 1 m cable with 7-pole bayonet connector	
Dimensions of housing:	GGA...: approx. Ø 36 mm x 95 mm (150 mm incl. anti-buckl. glanding), GGO...: approx. Ø 36 mm x 95 mm (150 mm incl. anti-buckl. glanding), GOO...: approx. Ø 40 mm x 105 mm (160 mm incl. anti-buckl. glanding) Housing with M16 x 1-screw thread (sensor can be connected to line tubes by means of an additional adapter)	
Weight:	approx. 135 g (GGO...) or approx. 145 g (GOO.../GGA...)	
Scope of supply:	GGA.../GGO...: sensor, flow diverter, T-piece GOO...: sensor, flow diverter	

Note: not suited for „under water“-applications (rebreather, etc.)

ACCESSORIES

GOEL 370

Art. no. 601490

Sensor element (acidic electrolyte)



General:

Integrated into GGO 370, GGA 370, GOO 370 (for GMH 3690/91/92/95) or GGO 570, GGA 570, GOO 570 (for GMH 5690/95); Universal sensor element with special precautions particularly for diving gas and protective gases from 0,2 ... 35 % O₂, even for applications with elevated CO₂ concentration.

Note: not suited for „under water“-applications (rebreather, etc.)

GOEL 381

Art. no. 610035

Sensor element (alkaline electrolyte)



General:

Integrated into GGO 381, GGA 381, GOO 381 (for GMH 3690/91/92/95) or GGO 581, GGA 581, GOO 581 (for GMH 5690/95); Fast sensor element especially for diving gas and protective gases from 0.0 ... 100 % O₂. For application without permanently higher CO₂ concentration

Note: not suited for „under water“-applications (rebreather, etc.)

Accessories and spare parts:

GZ-11

Art. no. 603144

Flow rate adapter to measure the oxygen concentration with 6/4 mm tube



ESA 369

Art. no. 603058

Spare tube-adapter M16x1, for tubes with a inner-diameter of 15 mm



ZOT 369

Art. no. 603094

T-piece



SUPPLEMENT FOR GAS
ANALYSIS AND AIR QUALITY
MEASURING DEVICES

GS 150

Art. no. 610005

Gas pump for gas sampling



HIGHLIGHTS:

- Easy to use
- Durable membrane pump
- Quiet
- Low quantity of conveyed gas
- Mobile operation with battery
- Battery charge indicator

Application:

E.g. in combination with residual oxygen measuring devices for protective gas applications, etc.

Specifications:

Functional principle:	Motorised membrane pump with input/output ports, battery-operated
Max. negative pressure:	approx. -360 mbar
Delivery rate:	open: approx. 380 ml / min, with GDZ 29: approx. 80 ml / min
Connection:	Universal pressure port for 6/4 mm hoses (inside Ø 4 mm)
Range of application:	10 ... 50 °C
Applicable gases:	Non-corrosive, dust-free gases, a condensate trap is recommended for gases with high humidity
Operation:	On/Off slide switch
Environmental conditions:	10 ... 50 °C, 0 ... 95 % RH
Battery / service life:	9 V block battery, approx. 10 h
Battery charge indicator:	2 LEDs: full / low
Scope of supply:	Device, battery, manuals

Accessories and spare parts:

GDZ-29

Art. no. 601599

Filter-Membrane incl. Luer-Locks (GDZ-32 und GDZ-33), prevents contamination with even the finest particles or liquids

COMPACT AIR OXYGEN MEASURING DEVICE



FOR DIVING
APPLICATIONS

GOX 100

Art. no. 600142

Air oxygen measuring device for universal applications

General:

- 1-button calibration
- Automatic power-off
- Min-/max- value memory
- Incl. sensor GOEL 370

Note: not suited for „under water“-applications (rebreather, etc.)

GOX 100T

Art. no. 600157

Air oxygen measuring device for diving applications

General:

- 1-button calibration
- MOD-Display (Maximum Operating Depth)
- HOLD function
- Incl. sensor GOEL 370

Note: not suited for „under water“-applications (rebreather, etc.)

Specifications:

Measuring range:	0.0 ... 100.0 % O ₂
Accuracy typ.:	±0.1 % O ₂ ±1 digit, calibrated device (range from 15 ... 40 % O ₂)
MOD (GOX 100T):	0 ... 100 m / 0 ... 199 ft
Sensor connection:	0.7 m jack-connector cable
Sensor:	Electrochemical oxygen-partial pressure probe, mounted in external sensor housing, M16x1 connection thread.
Warranty:	12 months
Working pressure:	0.5 ... 2.0 bar abs.
Over-/under-pressure:	max. 0.25 bar (pressure difference)
Working temperature:	0 ... 45 °C (sensor), -20 ... +50 °C (device)
Relative humidity:	0 ... 95 % RH
Power supply:	9 V battery
Power consumption:	approx. 120 µA (over 2500 h)
Display:	3½-digit, 13 mm high LCD-display
Housing:	ABS enclosure
Dimensions:	approx. 106 x 67 x 30 mm (H x W x D)
Weight:	approx. 185 g
Scope of supply:	Device incl. sensor, tube-adaper, t-piece, battery, manual

Variants:

GOX 100-LACK

Art. no. 602047

Air oxygen measuring device with encapsulated PC board (for applications where condensation is possible)

GOX 100-T-LACK

Art. no. 604660

Air oxygen measuring device with encapsulated PC board (for applications where condensation is possible)

RESIDUAL OXYGEN MEASURING SYSTEM RESOX



HIGHLIGHTS:

- With data logger and interface
- Pressure-compensated measurement – particularly important for rigid packages!
- Intelligent complete measuring system in a practical carry case

ResOx 5695-H

Art. no. 610040

Residual oxygen measuring system (for gases with elevated CO₂ percentage GOEL 370)

ResOx 5695-L

Art. no. 610041

Residual oxygen measuring system (with recommended sensor element GOEL 381)

General:

New measuring system with gas pump for more measuring comfort - can now also be used in rigid packages and packages with low quantities of gas.

Application:

Quality control for MAP food packaging and comparable applications

Specifications:

Measuring channels: O₂, T, air pressure

Measurement ranges

O₂: 0.0 ... 100.0 % O₂ or displayed in hPa O₂ / mmHg O₂

Temperature: 0.0 ... 50.0 °C

Air pressure: 300 ... 5000 hPa (sensor: 500 ... 2000 hPa)

Additional functions: Min / max function – for comfortable measurement of the limit value; Pressure compensation in the gas path – negative pressure in the package/on the sensor is compensated for

Applicable sensors: GOEL 370, 381 etc.

Connections on the device

Sensor: 7-pin bayonet
Pressure port for hoses with inside Ø 4 mm

Output / ext. power supply: OUT socket: - 38400 baud interface
- Analogue output 0 ... 1 V, adjustable
- External 5 V power supply

Calibration: Quick calibration on air at the push of a button or 2-point / 3-point (air +0 % and 100 %)

GLP: Calibrating interval, calibration history

Data logger: Cyclical: 10000, Single: 1000
Single value logger with measuring point entry

Pump: Motorised membrane pump with input/output ports, battery-operated

Max. negative pressure: approx. -360 mbar

Delivery rate: with GDZ 29 Filter: approx. 80 ml / min

Connection: Pressure port for hoses with inside Ø 4 mm

Additional features: Waterproof device and sensor (IP65, IP67), protective armouring, backlighting

Scope of supply:

Ready-to-operate system: Display GMH 5695, incl. battery, sensor housing with pressure connection incl. sensor, gas pump GS 150 incl. battery, connection lines, hoses/T-piece, 2 GDZ 29 filters, 2 GOG-N puncture needles Ø 0.9 mm, 1 GOG-B: 45 pcs. adhesive seal, carry case GKK 1420

QUICK MEASUREMENT:

- Apply adhesive seal
- Puncture with needle
- Switch on the pump
- Read the minimum value after approx. 20 s

Accessories and spare parts:

GOG-A

Art. no. 603043

Adhesive cellular foam (40 pcs.)

GOG-B

Art. no. 610013

Adhesive seal (45 pcs.)

GOG-N

Art. no. 603047

Puncture needle, Ø 0.9 mm (5 pcs.)

GDZ-29

Art. no. 601599

Filter membrane, including Luer locks (GDZ-32 and GDZ-33)

GS 150

Art. no. 610005

Gas pump

GOEL 370

Art. no. 601490

Spare sensor element, universal range, immersion gas, long-life

GOEL 381

Art. no. 610035

Spare sensor

USB 5100

Art. no. 601095

Interface adapter

GSOFT 3050

Art. no. 601336

Logger operating software

COMPACT CO-MEASURING DEVICE



HIGHLIGHTS:

- 3 display units selectable (ppm, mg/m³ and % CO Hb)
- Alert at exceeding the maximum concentration at work (MAK/AGW)
- incl. interface
- incl. calibration protocol

THE DEVICE IS ONLY INTENDED FOR CONTROL.
IT IS NOT A REPLACEMENT FOR A MONITORING DEVICE SUBJECT TO AUTHORISATION!

GCO 100

Art. no. 600062

CO-measuring device with alarm

General:

Carbon monoxide (CO) is created by the combustion of carbon. Depending on the effectiveness of the combustion (oxygen supply) and the temperature of the combustion more or less CO gas is created. The gas is inflammable and highly toxic. It is invisible, tasteless and scentless.

Even smallest concentrations are dangerous for humans!

Therefore a directive exists in Germany, which limits the maximum concentration of CO gas at work (MAK / AGW) to 30 ppm.

Application:

- Control of the air quality (e.g. at work place)
- Checking of heating systems, gas central-heating, fireplace
- Control of the air at maintenance work (tunnel, flue gas tract, ...)
- Detection of CO in the breath of smoker (% CO Hb)
- Cognition of CO poisoning i.e. at burnt offering (fire fighters, ...)

Specifications:

Measuring principle: electrochemical CO measuring cell**Measuring range:** 0 ... 1000 ppm CO concentration

Display ranges: 0 ... 1000 ppm CO concentration
0 ... 1250 mg/m³ CO concentration
0 ... 60.0 % CO Hb
(estimation via exhaled breath gas)

Resolution: 1 ppm, 1 mg/m³ or 0.1 % CO Hb**Sensor element:** integrated in device, measuring inlet at front plate, with inner thread for accessories screw in

Life time: >5 years at proper usage at air
suggested test interval: every 6 months
(depending on precision requirements)

Accuracy: (at range 0 ... 500 ppm)**Linearity:** < ±5 % of measured value ±1 digit**Repeatability:** < ±5 % of measured value ±1 digit**Interference (extract)**

	Concentration (ppm)	Residence time (min.)	Display (ppm)
Sulphur dioxide	50	600	<1
Nitrogen dioxide	50	900	-1
Nitric oxide	50	5	8
Hydrogen	100	5	20
Carbon dioxide	5000	5	0

Display: approx. 11 mm high, 4½-digit LCD-display**Pushbuttons:** 3 membrane keys**Nominal temperature:** 25 °C**Operating conditions:** -10 ... +50 °C, 15 ... 90 % RH (non condensing)**Storage temperature:** -10 ... +50 °C**Interface:** Serial interface, direct connection to RS232 or USB interface of a PC via electrically isolated interface adapter

Power supply: 9 V battery as well as additional d.c. connector for external
10.5 ... 12 V direct voltage supply. (suitable power supply: GNG 10/3000)

Battery life: >1000 h**Housing:**

Impact-resistant ABS plastic housing, membrane keyboard, transparent panel, integrated pop-up clip

Dimensions:

142 x 71 x 26 mm (H x W x D)

Weight:

approx. 155 g

Scope of supply:

Device, battery, calibration protocol, manual

Accessories and spare parts:**ESA 100**

Art. no. 603013

Tube-adaptor/flow diverter to screw in front plates.

ZOT 369

Art. no. 603094

T-piece

GRV 100

Art. no. 603093

Non return valve

MSK 100

Art. no. 603012

Mouth piece of plastic

GAS 100

Art. no. 603587

Extension set for exhaled air control
(consisting of ESA 100, ZOT 369, GRV 100 and 5 x MSK 100)**GZ-10**

Art. no. 603133

Test gas cap GCO (for controlled flow with test gas)

GZ-02

Art. no. 606710

Gas bottle with 12l test gas: 30 ppm CO

GZ-03

Art. no. 606711

Gas bottle with 12l test gas: 300 ppm CO

GZ-04

Art. no. 603570

Gas valve unit MiniFlo for gas bottles with 12l

GB 9 V

Art. no. 601115

spare battery 9 V / approx. 30 0mA/h

GKK 3000

Art. no. 601048

Case (275 x 229 x 83 mm) with punched lining

USB 3100 N


Art. no. 601092

Interface converter to USB, electrical isolated

GAM 3000

Art. no. 601132

switching module for 230 V AC / 10 A



INDOOR AIR QUALITY MONITORS



AIR QUALITY

HIGHLIGHTS:

- Indoor air quality permitting calculation of automatic ventilation rate by CO₂ analysis correlate to the real presence of people in the rooms

HD21-ABE-17

Art. no. 700049

Indoor air quality monitors

General:

HD21-AB-17 IAQ Monitor is a bench-top/portable instrument manufactured by Delta Ohm for the analysis of indoor air quality (IAQ, Indoor Air Quality).

The instrument simultaneously measures the parameters:

- Carbon Dioxide CO₂
- Carbon Monoxide CO
- Atmospheric Pressure
- Temperature
- Relative Humidity

and it calculates:

- Dew Point
- Wet Bulb Temperature
- Absolute Humidity
- Mixing Ratio
- Enthalpy

These regulations apply to all confined spaces that could be used by people. Kitchens, baths, changing rooms and swimming pools are included, due to their high humidity. You should take into account, in regard to air quality, possible chemical, physical and biological contaminants. The instruments have a wide Dot Matrix graphic display with a resolution of 160 x 160 dots.

The instruments typical applications are:

- Measurement of IAQ (Indoor Air Quality) and comfort conditions in schools, offices and indoor spaces.
- Analysis and study of the Sick Building Syndrome, and of the resulting consequences.
- Checking the HVAC (Heating, Ventilation and Air Conditioning) system efficiency.
- Examination of IAQ conditions in factories to optimize microclimate and improve productivity.
- Building Automation checks.

Specifications:

Device

Dimensions:	300 x 90 x 40 mm (H x W x D) (with probe)
Material:	ABS, rubber
Display:	Backlight, Dot Matrix, 160 x 160 dots, visible area 52 x 42 mm

Operating conditions

Working temperature:	-5 ... +50 °C
Storage temperature:	-25 ... +65 °C
Working relative humidity:	0 ... 85 % RH without condensation
Protection degree:	IP30
Instrument uncertainty:	±1 digit @ 20 °C

Power supply

Mains adapter (Code SWD-10):	12 V DC/1 A
Batteries:	4 x 1.2 V Ni-MH rechargeable batteries AA type
Autonomy:	8 h of continuous use in measure mode

Serial interface

Socket:	mini-USB
Type:	USB 1.1 or 2.0 not insulated
Storage capacity:	67.600 recordings

Scope of supply:

IAQ Monitor datalogger kit. Complete with: DeltaLog10 software (version 0.1.5.3 and later), monitor, and data processing on Personal Computer, 4 x 1.2 V NiMH rechargeable batteries, manual, case, with USB cable and mains adapter

CO₂ Carbon Dioxide

Sensor:	NDIR Dual Wavelength (two frequencies)
Measuring range:	0 ... 5.000 ppm
Sensor working range:	-5 ... +50 °C
Accuracy:	±50 ppm ±3 % of measurement
Resolution:	1 ppm
Temperature dependence:	0.1 % f.s./°C
Response time (T₉₀):	<120 s (air speed = 2 m/s)

CO Carbon Monoxide

Sensor:	Electrochemical cell
Measuring range:	0 ... 500 ppm
Sensor working range:	-5 ... +50 °C
Accuracy:	±3 ppm ±3 % of measurement
Resolution:	1 ppm
Response time (T₉₀):	<50 s
Service life:	>5 years in normal environment conditions

Atmospheric Pressure (Patm)

Type of sensor:	Piezo-resistive
Measuring range:	750 ... 1.100 hPa
Accuracy:	±1.5 hPa @ 25 °C
Resolution:	1 hPa
Temperature drift:	±3 hPa with temperature -20 ... +60 °C

Relative Humidity (RH)

Type of sensor:	Capacitive
Sensor protection:	Stainless steel grid filter (on request 10 µm sintered filter P6 in AISI 316 or 20 µm sintered filter P7 in PTFE)
Measuring range:	0 ... 100 % RH
Sensor working range:	-20 ... +60 °C
Accuracy:	±1.5 % RH (0 ... 90 % RH) ±2 % RH (elsewhere) for T=15 ... 35 °C ±(1.5 + 1.5 % of the measure) % RH for T= -20 ... +60 °C
Resolution:	0.1 °C
Temperature dependence:	±2 % on all temperature range
Hysteresis and repeatability:	1 % RH
Response time (T₉₀):	<20 s (air speed = 2 m/s) without filter

Temperature T

Sensortyp:	NTC 10 kΩ
Measuring range:	-20 ... +60 °C
Accuracy:	±0.2 °C ±0.15 % of measurement
Resolution:	0.1 °C
Response time (T₉₀):	<30 s (air speed = 2 m/s)

Accessories:

SWD-10

Art. no. 700039

Stabilized power supply at 100-240 V AC / 12 V DC / -1 A mains voltage.

CP-23

Art. no. 700050

Connection cable with type B MiniUSB connector on instrument's side and USB 2.0 connector on PC's side.

BAT-40

Art. no. 700051

Spare batteries with built-in temperature sensor.

ECO-SURE-2E-CO

Art. no. 700052

CO spare sensor

MINICAN-12-A-0

Art. no. 700059

Nitrogen can for CO and CO₂ calibration at 0 ppm, 20 litres

HD-37-36

Art. no. 700053

Connection tube kit for CO calibration

HD-37-37

Art. no. 700054

Connection tube kit for CO₂ calibration

HD-33-0

Art. no. 700055

33 % RH saturated solution for checking the relative humidity sensor

PRESSURE



	GMH 5130 GMH 5150 GMH 5155	GMH 3111 GMH 3151 GMH 3156	GMH 3161-12 GMH 3181-12	GMH 3161-002 / -01 / -07... / -13	GMH 3181-002 / -01 / -07... / -13	GDH 200-07 GDH 200-13	GDH 200-14	GPB 3300 GTD 1100	GDSB 1000
APPLICATION:									
Relative pressure meas. (over, under- and pressure difference)	• • •	• • •		•	•	• •			•
Absolute pressure measuring	• • •	• • •	• •				•	• •	•
Heating, ventilation, climate	• • •	• • •	• •	•	•	• •	•	• •	•
Measuring in liquids	• • •	• • •							•
Vacuum measuring	• • •	• • •	• •				•		•
Meteorology			• •				•		
Altitude measuring (sports)								•	
Water-proof application	• • •								
Ex-protection		• • •	• •	•	•				
EQUIPMENT:									
Plug-in probe	1 1 2	1 1 2							1
Min/Max, Zero	• • •	• • •	• •	•	•	• •	•	• •	•
Alarm / Data logger / Analog output	• •	• •	•		•				
DEVICE INFORMATION:									
Catalogue page	Page 83	Page 84 / 85	Page 92	Page 90 - 92	Page 90 - 92	Page 93	Page 93	Page 94	Page 87

WATER-PROOF HANDHELD DEVICE FOR PRESSURE MEASUREMENT WITH EXTERNAL CHANGEABLE PROBES



GMH 5130/50



GMH 5155

suitable pressure probes
p. r. t. page 88 / 89

HIGHLIGHTS:

- Peak value detection (1000 measurements / s)
- Large double display with background illumination
- Calibrated and fully interchangeable pressure probes
- incl. calibration protocol

ADDITIONAL FUNCTIONS GMH 5150 AND 5155:



ADDITIONAL FUNCTIONS GMH 5155:

- 2 GMSD/MSD-probes connectable.
- Difference measurement of two probes

WATER-PROOF DEVICE AND
PLUG-IN CONNECTIONS

GMH 5130

Art. no. 600027

Pressure measurement device with 1 sensor connection, without sensor

GMH 5150

Art. no. 600031

Pressure measurement device with 1 sensor connection, analog output and data logger, without sensor

GMH 5155

Art. no. 600033

Pressure measurement device with 2 sensor connections, analog output and data logger, without sensors

General:

This handheld instrument is a valuable tool for demanding pressure measurements. Extremely robust plug connections, the silicone protection cover, backlight and a water-proof design allow its usage in harsh industrial and field environments.

Application:

- Industry and craft, HVAC: heating, ventilation, air-conditioning
- Leakage test / pressure test
- Chimney draft measurement: under pressure, leakage test at buildings (i.e. 4 Pascal test)
- Measurements of gas and oil firings
- Automobile trade, hydraulic analysis (peak pressure)

Specifications:	GMH 5130
Sensor connections:	1
Suitable probes:	GMSD / MSD sensors, available ranges (resolutions) from -1.999 ... 2.500 mbar (0.001 mbar) to 0 ... 1000 bar (1 bar)
Display range max.:	-19999 ... +19999 digit
Display unit: *	depends on measuring range selection and sensor: mbar, bar, Pa, kPa, MPa, mmHg, inHg, PSI, mH ₂ O
Measuring frequency:	4 measurements / s or 1000 measurements / s with peak value memory
Average filter:	adjustable: 1 ... 120 s
Accuracy:	±0.1 % FS ±1 digit
Connections	
Sensor:	1 x 7-pole bayonet connector
Output / external supply:	4-pole bayonet connector for serial interface, supply (with accessories: USB adapter USB 5100)
Display:	4 ½ digit 7-segment, illuminated (white)
Operating conditions:	-25 ... +50 °C, 0 ... 95 % RH (non-condensing)
Storage temperature:	-25 ... +70 °C
Power supply:	2 x AAA-battery, battery life 500 h (without illumination, 4 measurings / s)
Housing:	impact resistant ABS housing with pop-up clip
Protection class:	IP65 / IP67
Dimensions:	160 x 86 x 37 mm (H x W x D) incl. silicone protection cover (red)
Weight:	approx. 250 g incl. battery and protection cover
Scope of supply:	Device, battery, calibration protocol, manual

Specifications:	GMH 5150 and GMH 5155
Sensor connections:	1, GMH 5155: 2
Suitable probes:	GMSD / MSD sensors, available ranges (resolutions) from -1.999 ... 2.500 mbar (0.001 mbar) to 0 ... 1000 bar (1 bar)
Display range max.:	-19999 ... +19999 digit
Display unit:	depends on measuring range selection and sensor: mbar, bar, Pa, kPa, MPa, mmHg, inHg, PSI, mH ₂ O, user
Measuring frequency:	4 measurements / s or 1000 measurements / s with peak value memory
Average filter:	adjustable: 1 ... 120 s
Accuracy:	±0.1 % FS ±1 digit
Connections	
Sensor:	1 x 7-pole bayonet connector GMH 5155 only: 2 x 7-pole bayonet connector
Output / external supply:	4-pole bayonet connector for serial interface, supply (with accessories: USB adapter USB 5100)
Analog output:	0 ... 1 V, freely adjustable, connection with 4-pole bayonet connector, resolution 12 bit
Display:	4 ½ digit 7-segment, illuminated (white)
Operating conditions:	-25 ... +50 °C, 0 ... 95 % RH (non-condensing)
Storage temperature:	-25 ... +70 °C
Power supply:	2 x AAA-battery, battery life 500 h (without illumination, 4 measurings / s)
Housing:	impact resistant ABS housing with pop-up clip
Protection class:	IP65 / IP67
Dimensions:	160 x 86 x 37 mm (H x W x D) incl. silicone protection cover (red)
Weight:	approx. 250 g incl. battery and protection cover
Scope of supply:	Device, battery, calibration protocol, manual

Additional functions:

Additional Display for Battery: Bar graph display
Background Illumination: duration adjustable (off, 5 s ... 2 min.)
Adjustment: offset / slope adjustable in menu
User-defined displayed unit: (user/GMH 5150/55)
 conversion to any unit with help of linear factor
Leakage test function (GMH 5150/55):
 leak rate display, leak rate alarm (/s, /min, /h)
Air velocity / flow volume (GMH 5150/55):
 Pitot tube measurement (accessories)
peak-detect (Peak value memory):
 The min- / max- value memory stored unfiltered pressure peaks ≥ 1 ms
Logger function:
 with measuring point input, adjustable cycle time: 1 s ... 1 h,
 recording time: 416 days at interval 1 h, data logger: cyclic: 10.000 data sets (GMH 5150),
 8.000 data sets (GMH 5155); manual: 1.000 data sets (with measuring point input, 40 adjustable measuring point texts or measuring point numbers)

* = Note to the pressure unit selection:

The choice of a specific pressure unit is possible, if its whole measuring range is displayable within the display of the device and the sensor is supporting these resolution.

PRESSURE MEASURING DEVICE WITH LOGGER



LOGGER FUNCTION



GMH 3151



GMH 3156

HIGHLIGHTS:

- 4½-digit display, probes with higher resolution up on request
- Peak value memory 1000 measurements / s
- Analog output 0 ... 1 V
- Digital adjustable
- Integrated horn

ADDITIONAL FUNCTIONS GMH 3156:

- 2 GMSD/MSD-probes connectable.
- Difference measurement of two probes

Suitable pressure probes
p.r.t. page 88 / 89

GMH 3151

Art. no. 600381

Pressure measuring device with 1 sensor connection, analog output and data logger, without sensor

GMH 3156

Art. no. 600386

Pressure measuring device with 2 sensor connections, analog output and data logger, without sensor

GMH 3151-EX

Art. no. 600383

EX-Pressure measuring device with 1 sensor connection, analog output and data logger, without sensor (see previous page for information on Ex versions)

GMH 3156-EX

Art. no. 600394

EX-Pressure measuring device with 2 sensor connections, analog output and data logger, without sensor (see previous page for information on Ex versions)

Specifications:

Max. display range:	-19999 ... +19999 digit
Measuring range:	corresponding to used probe
Overload:	corresponding to used probe
Resolution:	corresponding to used probe
Accuracy (device):	±0.1 % FS ±1 digit (at nominal temperature = 25 °C)
Pressure units*:	mbar, bar, Pa, kPa, MPa, mmHg, PSI, mH ₂ O, can be selected.
Probe connection:	1, bei GMH 3156/-EX: 2 6-pin screened lockable Mini-DIN-socket(s) for GMSD/MSD-sensors. Automatic probe detection and setting of measuring range upon plugging in of probe.
Display:	2 x 4½ digit LCD
Output:	serial interface or AAG
Serial interface:	direct connection to RS232 or USB interface of a PC via electrically isolated interface converter GRS 3100, GRS 3105 or USB 3100 N.
Analog output:	0 ... 1 V, freely adjustable (resolution 12 bit)
Power supply:	9 V-battery, d.c. connector * for external 10.5 ... 12 V direct voltage supply. (i. e. GNG10/3000)
Sensor adjustment:	digital offset and scale input
Measuring cycle: „slow“	4 measurements / s
„fast“ / „peak-detect“	≥1000 measurements / s
peak-detect:	The min- / max- value memory stored unfiltered pressure peaks ≥1 ms

Logger functions

manually data sets:	99 data sets
cycle data sets:	10000 GMH 3156/-EX: 4000 (max. 64 recording sequences)
adjustable cycle time:	1 ... 3600 s
Averaging function:	x
Battery life:	approx. 180 h (4 measurements / s) approx. 40 h (1000 measurements / s)
Operating conditions:	-25 ... +50 °C, 0 ... +95 % RH (non condensing), GMH 315x-EX: -10 ... +50 °C, 0 ... 95 % RH (non condensing)
Housing:	impact-resistant ABS plastic housing, foil keypad, clear viewing pane GMH315x-EX only: pop-up clip for table top or suspended use.
Dimensions:	142 x 71 x 26 mm (H x W x D)
Weight:	approx. 150 g, GMH 315x-EX: approx. 190 g (incl. case)
Scope of supply:	Device, battery, calibration protocol, manual

Additional functions:

Averaging function: integrates the meas. values during a selectable period of time and then calculates the average display value.

Sea-Level-correction: when connecting an abs. pressure probe the barom. air pressure can also be displayed corrected to sea level „zero“. (Air pressure compensation achieved by entering the meters above sea level „zero“)

Logger Functions:


- manual: 99 data sets
- cyclic: 10000 data sets (GMH 3151)
4000 data sets (GMH 3156)

(max. 64 Aufzeichnungsreihen), adjustable cycle time: 1 ... 3600 s; The logger is started or stopped by keypad or interface. The software GSOFT3050 (see accessories) is available for comfortable read-out of logger data.

* Note to the pressure unit selection: (information for all GMH 31xx)

The choice of a specific pressure unit is possible, if its whole measuring range is displayable within the display of the device and the sensor is supporting these resolution.

TUBE, TUBE CLIPS, ADAPTER, COUPLINGS, ETC.

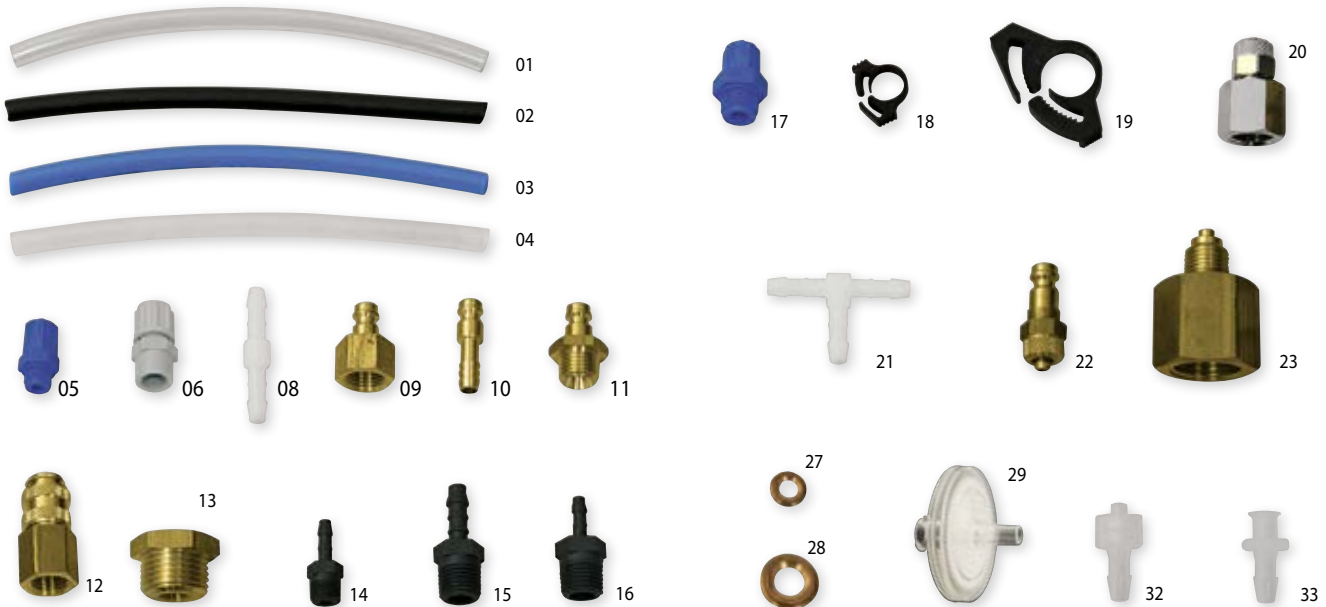

for GMH31xx, GMSD, MSD, GDHs and pressure measuring transducers

GDZ-01

Art. no. 601541

PVC-tube 6/4 (6 mm outside-Ø, 4 mm inside-Ø) (5 bar @ 23 °C)

GDZ-02

Art. no. 601543

PE (polyethylene) 6/4 (6 mm outside-Ø, 4 mm inside-Ø) (10 bar @ 23 °C)

GDZ-03

Art. no. 601545

PUR (polyurethane) 6/4 (6 mm outside-Ø, 4 mm inside-Ø) (9 bar @ 23 °C)

GDZ-04

Art. no. 601547

PA (polyamide) 6/4 (6 mm outside-Ø, 4 mm inside-Ø) (25 bar @ 23 °C)

GDZ-05

Art. no. 601549

Screw-type glanding for 6/4 tube with outside thread G1/8"

GDZ-06

Art. no. 601551

Increaser glanding for 6/4 tube with inside thread G1/8"

GDZ-08

Art. no. 601555

Double adapter for 6/4 tube to 6/4 tube

GDZ-09

Art. no. 601557

Coupling adapter (NW5) made of brass with inside thread G1/4" (suitable for GDZ-12)

GDZ-10

Art. no. 601559

Coupling adapter (NW5) made of brass for tube with 6 mm inside-Ø (suitable for GDZ-12)

GDZ-11

Art. no. 601561

Coupling adapter (NW5) made of brass with outside thread G1/4" (suitable for GDZ-12)

GDZ-12

Art. no. 601564

Coupler socket (NW5) made of brass (single-hand use) with inside thread G1/4"

GDZ-13

Art. no. 601566

Increaser/reducer made of brass with G1/2" outside thread and G1/8" inside thread

GDZ-14

Art. no. 601568

Screw-in nozzle for 6/4 tube with outside thread G1/8"

GDZ-15

Art. no. 601570

Screw-in nozzle for tube with 6 mm inside-Ø with outside thread G1/4"

GDZ-16

Art. no. 601572

Screw-in nozzle for 6/4 tube with outside thread G1/4"

GDZ-17

Art. no. 601574

Screw-in connection for 6/4 tube with outside thread G1/4"

GDZ-18

Art. no. 601576

Tube clamp for 6/4 tube

GDZ-19

Art. no. 601578

Tube clamp for 8/6 tube (8 mm outside-Ø and 6 mm inside-Ø)

GDZ-20

Art. no. 601580

Screw-on connection made of brass for 6/4 tube with inside thread G1/4"

GDZ-21

Art. no. 601582

T-piece for 6/4 tubes

GDZ-22

Art. no. 601584

Coupling adapter (NW5) made of brass with tube connection 6/4 (suitable for GDZ-12)

GDZ-23

Art. no. 601586

G1/2" female to G1/4" male adapter, brass

GDZ-27

Art. no. 601594

Manometer profile gasket (thickness 3 mm, Cu) for G1/4" hread

GDZ-28

Art. no. 601597

Flat gasket (thickness 5 mm, Cu) for thread G1/2"

GDZ-29

Art. no. 601599

Filter-Membrane incl. Luer-Locks (GDZ-32 and GDZ-33)

GDZ-30

Art. no. 601601

Adapter G1/2" inside thread to tube 6/4 (w/o picture)

GDZ-31

Art. no. 606070

Silicone tube 8/5 (8 mm outer / 5 mm inner) (2 bar at 23 °C) temperature-resistant up to 200 °C, very flexible (figure similar to GDZ-04)

GDZ-32

Art. no. 607951

Luer-lock male to hose 6/4

GDZ-33

Art. no. 607952

Luer-lock female to hose 6/4

GWA 1214

Art. no. 603979

Adapter G1/4" inside thread to G1/2" outside thread (without picture)

GOG-N

Art. no. 603047


needle, Ø 0.9 mm - suitable to Luer-Lock male (5 pieces) (without picture)

UNIVERSAL PRESSURE MEASUREMENT SYSTEM



1000 MEASUREMENTS
PER SECOND LIVE

THE SAME SENSORS CAN BE USED AS WITH
HANDHELD MEASURING DEVICE GMH 3151

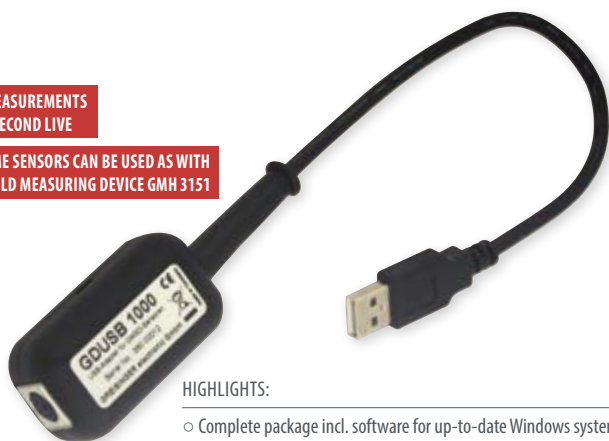

HIGHLIGHTS:

- Complete package incl. software for up-to-date Windows systems
- Live display before and live diagram display

Suitable pressure probes
p.r.t. page 88 / 89

GDUSB 1000

Art. no. 600271

Full set incl. software for high-speed live measurement data logging GDUSB FastView
(p.r.t. page 87)

Application:

- Test rigs and laboratory experiments
- Detection of pressure peaks
- Monitoring system pressure curves e.g. for process technology, engineering, etc.
- Live displaying of measuring data of several GDUSB 1000
- Data evaluation and logging, for optimization of processes and other statistics
- Multi-channel measurements with high recording rate
- Test setups or on-site recordings with GDUSB 1000

Functions:

The GDUSB 1000 adapter allows to connect a standard pressure sensor of type GMSD / MSD directly to the USB interface of a PC. It provides 4 channels, i.e. currently measured value, average value, max and min value. There are two operation modes:

Fast mode:

Up to 1000 measured values per second. The provided software displays the data and records for later usage. The software can be configured to start or stop the recording with several selectable trigger conditions

Standard mode:

Up to 32 measurements per second. A GDUSB 1000 in standard mode can be responded similarly to GMH handheld devices or EASYBus modules. Then a long term recording can be archived with the software EBS 20M / EBS 60M (2 measurements per second).

Specifications:

Measuring range:	depends on connected sensor
Max. range:	-19999 ... +19999 digit
Pressure units:	mbar, bar, Pa, kPa, MPa, mmHg, PSI, mH ₂ O, selectable, depending on connected sensor
Measuring rate:	1000 measurements / s (= 1 ms)
Accuracy:	±0.2 % FS (at nominal temperature = 25 °C)
Recording interval:	1 ms (FAST mode) ... 10 s, adjustable via software


Connections

PC:	standard USB plug (type A)
GMSD / MSD:	6-pole screened mini-DIN socket with locking
Power supply:	supplied by USB interface
Dimensions:	56 x 31 x 24 mm
Cable length (USB):	approx. 20 cm
Weight:	39 g (device only)
Scope of supply:	Device, manual, software- and driver-CD

HIGH-SPEED LIVE MEASUREMENT



FOR GDUSB 1000

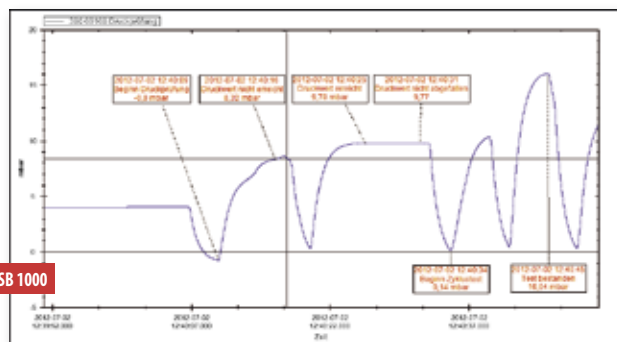

GDUSB FastView

Software for high-speed live measurement data logging of fast pressure measurements

Functions:

- Several GDUSB 1000 usable at one PC at the same time
- Measuring rates up to 1000 measurements per second
- Live display with current value and measurement diagram, even for highest measuring rates
- Different measuring rates for each sensor selectable
- Safe storage of measurement and sensor data in a SQL based data base
- Fast diagram display
- Comment function for measured values
- Data export as CSV file and as picture
- Multi-language software (German, English, French, Italian, Czech)
- 32-bit or 64-bit application

System requirements:

1GHz CPU, 1GB RAM, 100 MB HDD, 1 available USB Port
Microsoft Windows 7 SP1 (32 or 64 bit)
(not executable with Windows RT, ARM or Intel Itanium based Windows systems)

*This software uses open-source components under LGPL conditions.
The license terms of this software provide further information.*

PLASTIC PRESSURE SENSORS WITH TUBE CONNECTION



FOR AIR AND NON
AGGRESSIVE GASES

General:

for use with
GMH 31xx, GDUSB: Type GMSD ... -K31,
GMH 51xx: Type GMSD ... -K51

Application:

air and non aggressive gases
Plastic pressure sensors are not suitable for water / liquids.

SENSORS FOR MEASURING PRESSURE DIFFERENCE

for differential pressure measuring (both pressures are connected) as well as for relative pressure measuring (pressure / vacuum, one terminal is left open)

	GMSD 2,5 MR ..	GMSD 25 MR ..	GMSD 350 MR ..	GMSD 2 BR ..	GMSD 10 BR ..
Measuring range:	-1.999 ... +2.500 mbar	-19.99 ... +25.00 mbar	-199.9 ... +350.0 mbar	-1000 ... +2000 mbar	-1.00 ... +10.00 bar
Overload:	max. 200 mbar	max. 300 mbar	max. 1 bar	max. 4 bar	max. 10.34 bar
Resolution:	0.001 mbar (0.1 Pa)	0.01 mbar (1 Pa)	0.1 mbar	1 mbar	10 mbar
Accuracy (typ.)					
Hysteresis / linearity:	±0.2 % FS	±0.2 % FS	±0.2 % FS	±0.2 % FS	±0.2 % FS
Temperature influence (from 0 ... 50 °C):	±1.0 % FS	±0.5 % FS	±0.4 % FS	±0.4 % FS	±0.4 % FS
OPTION Higher probe accuracy:			±0.1 % / ±0.2 % FS	±0.1 % / ±0.2 % FS	±0.1 % / ±0.2 % FS
GMSD ... - K31					
Art. no.	601039	601148	601154	601170	601183
GMSD ... - K51					
Art. no.	601038	601149	601157	601171	601184

ABSOLUTE PRESSURE SENSORS

for absolute pressure measuring (one terminal is without functionality)

	GMSD 1,3 BA ..	GMSD 2 BA ..	GMSD 7 BA ..
Measuring range:	0 ... 1300 mbar abs.	0 ... 2000 mbar abs.	0.00 ... 7.00 bar abs.
Overload:	max. 4 bar abs.	max. 4 bar abs.	max. 10.34 bar abs.
Resolution:	1 mbar	1 mbar	10 mbar
Accuracy (typ.)			
Hysteresis / linearity:	±0.2 % FS	±0.2 % FS	±0.2 % FS
Temperature influence (from 0 ... 50 °C):	±0.4 % FS	±0.4 % FS	±0.4 % FS
OPTION Higher probe accuracy:	±0.1 % FS (hysteresis, linearity); ±0.2 % FS (temperature influence 0 ... 50 °C)		
GMSD ... - K31			
Art. no.	601192	601196	601200
GMSD ... - K51			
Art. no.	601193	601197	601201

Specifications:

Sensor:	piezoresistive pressure sensor
Pressure connection:	2 connection pins for tubes 6 x 1 mm (6 mm inside-Ø and 4 mm outside-Ø)
Electronics:	PC board with amplifier and data memory for sensor data (measuring range / calibration etc.) integrated in sensor housing
Working temperature:	0 ... +50 °C
Relative humidity:	0 ... +95 % RH (non condensing)
Storage temperature:	-25 ... +70 °C
Housing:	ABS plastic with suspension eye, dimensions do not incl. conn. pin: 68 x 32.5 x 15 mm (H x W x D), dimensions with connection pin: 68 x 32.5 x 27.5 mm.
Weight:	approx. 75 g (...K51: approx. 82 g)

Device connection

GMSD ... - K31:	1.2 m PVC connection cable, screened with integral 6-pin Mini-DIN-plug, lockable
GMSD ... - ex:	
GMSD ... - K51:	1 m PVC connection cable, screened with 7-pin bayonet plug

Scope of supply: Device, calibration protocol, manual

Options:**Ex-protection****Higher probe accuracy**

by multi point calibration
Additional individual linearisation points are stored in sensor memory. (not possible for GMSD 2,5 MR and GMSD 25 MR!)

ISO-WPD5

Art. no. 602514

Certificate of calibration: 5 points ascending, 5 points descending

STAINLESS STEEL PRESSURE SENSORS G½ INCH



FOR AIR, AGGRESSIVE
GASES AND LIQUIDS

FOLLOW-ON TYPE FÜR GMSD-
STAINLESS-STEEL-SENSORS

MSD...

Stainless steel pressure sensors without cable

Connection cable MSD-K31 or MSD-K51 has to be ordered separately (accessories)

General:

for use with GMH31xx, GMH 51xx and GDUSB 1000

Application:

Air, aggressive gases, aggressive liquids / water, etc.

Abs. pressure	Measuring range	Overload	Resolution
MSD 1 BAE Art. no. 600583	0 ... 1000 mbar abs.	max. 5 bar abs.	1 mbar
MSD 2,5 BAE Art. no. 600585	0 ... 2500 mbar abs.	max. 10 bar abs.	1 mbar
MSD 4 BAE Art. no. 600587	0 ... 4000 mbar abs.	max. 17 bar abs.	1 mbar
MSD 6 BAE Art. no. 600592	0 ... 6000 mbar abs.	max. 35 bar abs.	1 mbar
MSD 10 BAE Art. no. 600594	0 ... 10.00 bar abs.	max. 35 bar abs.	10 mbar
MSD 16 BAE Art. no. 600596	0 ... 16.00 bar abs.	max. 80 bar abs.	10 mbar
MSD 25 BAE Art. no. 600598	0 ... 25.00 bar abs.	max. 50 bar abs.	10 mbar
Rel. pressure	Measuring range	Overload	Resolution
MSD 100 MRE Art. no. 600600	0.0 ... 100.0 mbar rel.	max. 1 bar rel.	0,1 mbar
MSD 250 MRE Art. no. 600604	0.0 ... 250.0 mbar rel.	max. 2 bar rel.	0,1 mbar
MSD 400 MRE Art. no. 600606	0.0 ... 400.0 mbar rel.	max. 2 bar rel.	0,1 mbar
MSD -1/1.5 BRE Art. no. 600608	-1000 ... +1500 mbar rel.	max. 10 bar rel.	1 mbar
MSD -1/3 BRE Art. no. 600610	-1000 ... +3000 mbar rel.	max. 17 bar rel.	1 mbar
MSD 1 BRE Art. no. 600612	0 ... 1000 mbar rel.	max. 5 bar rel.	1 mbar
MSD 2,5 BRE Art. no. 600614	0 ... 2500 mbar rel.	max. 10 bar rel.	1 mbar
MSD 4 BRE Art. no. 600616	0 ... 4000 mbar rel.	max. 17 bar rel.	1 mbar
MSD 6 BRE Art. no. 600618	0 ... 6000 mbar rel.	max. 35 bar rel.	1 mbar
MSD 10 BRE Art. no. 600620	0.00 ... 10.00 bar rel.	max. 35 bar rel.	10 mbar
MSD 25 BRE Art. no. 600622	0.00 ... 25.00 bar rel.	max. 50 bar rel.	10 mbar
MSD 40 BRE Art. no. 600624	0.00 ... 40.00 bar rel.	max. 80 bar rel.	10 mbar
MSD 60 BRE Art. no. 600627	0.00 ... 60.00 bar rel.	max. 120 bar rel.	10 mbar
MSD 100 BRE Art. no. 600629	0.0 ... 100.0 bar rel.	max. 200 bar rel.	0,1 bar
MSD 160 BRE Art. no. 600631	0.0 ... 160.0 bar rel.	max. 320 bar rel.	0,1 bar
MSD 250 BRE Art. no. 600639	0.0 ... 250.0 bar rel.	max. 500 bar rel.	0,1 bar
MSD 400 BRE Art. no. 600633	0.0 ... 400.0 bar rel.	max. 800 bar rel.	0,1 bar
MSD 600 BRE Art. no. 600635	0.0 ... 600.0 bar rel.	max. 1200 bar rel.	0,1 bar
MSD 1000 BRE Art. no. 600637	0 ... 1000 bar rel.	max. 1500 bar rel.	1 bar

MSD 25 MRE

MSD -20/60 MRE

not suited for aggressive media, water, etc., no Ex design and no option „higher accuracy“ available

Rel. pressure	Measuring range	Overload	Resolution
MSD 25 MRE Art. no. 606904	0.00 ... 25.00 mbar	max. 500 mbar	0.01 mbar
MSD -20/60 MRE Art. no. 606765	-20.00 ... +60.00 mbar	max. 500 mbar	0.01 mbar

Specifications:

Sensor:	stainless steel pressure sensor (parts coming into contact with media). Suitable for aggressive media, water, etc.. (does not apply to MSD 25 MRE and MSD -20/60 MRE)
Accuracy (typ. values):	±0.2 % FS (hysteresis and linearity) ±0.02 % FS / K (TC for zero or slope)
Electronics:	PC board with amplifier and data memory for sensor data (meas. range, etc.) integrated in sensor housing, sealed sensor electronic
Reaction time:	1 ms
Medium temperature:	-25 ... +100 °C (compensated range: 0 ... 80 °C); -25 ... +80 °C at MSD 25 MRE and MSD -20/60 MRE
Working temperature:	-20 ... +80 °C
Storage temperature:	-40 ... +80 °C
Pressure connection:	connection thread G1/2B (other on request).
Cable connection:	M16 built-in plug
Housing:	CrNi-steel or elgiloy (parts coming into contact with media) length: 88.5 mm, Ø 27 mm, approx. 220 g
Protection class:	IP 67 (sensor)
Scope of supply:	pressure sensor, calibration protocol, manual; Note: Connection cable has to be ordered separately.

Options:

Higher probe accuracy
by multi point calibration. Additional individual linearisation points are stored in sensor memory. (not available for MSD 25 MRE and MSD -20 / 60 MRE)

ISO-WPD5

Art. no. 602514

Certificate of calibration: 5 points ascending, 5 points descending

Accessories:

MSD-K31

Art. no. 600657

Connection cable for use with GMH 31xx / GDUSB 1000
1.2 m PVC connection cable, screened with integral 6-pin Mini-DIN-plug and M16-socket (IP 54)

MSD-K51

Art. no. 603809

Connection cable for use with GMH 51xx
1 m PVC connection cable, screened with 7-pin bayonet plug cable and plug connection water proof acc. to IP 67 and M16-socket

MSD-K31-xx

Longer connection cable (as MSD-K31); Length 2 ... 10 m please specify

MSD-K51-xx

Longer connection cable (as MSD-K51); Length 2 ... 10 m please specify

Ex-Protection:



MSD ... - ex
Stainless steel pressure sensor (without cable) with Ex-protection

MSD-K31 - ex

Art. no. 600871

Connection cable with Ex-protection
Connection to GMH 31xx, 1 m connection cable, screened with integral 6-pin Mini-DIN-plug and M12-socket

HAND-HELD MEASURING DEVICES WITH INTEGRATED SENSOR



HIGHLIGHTS:

- Integrated pressure sensor
- Sturdy metal connection pin
- Tare function / zero point offset
- Model with protection available

ADDITIONAL FEATURES GMH 3181-...:



Type specific data:	GMH 3161 - ...	GMH 3181 - ...	GMH 3161 - ... -EX	GMH 3181 - ... -EX
Display:	2 x 4½-digit LCD	2 x 4½-digit LCD	2 x 4½-digit LCD	2 x 4½-digit LCD
Sensor:	Piezoresistive differential pressure sensor internally built into the instrument. Suitable for air and non-aggressive gases. (Note: Not suited for water!)			
Pressure connection:	2 pressure port for universal 6 x 1 mm (4 mm hose inside diameter) or 8 x 1 mm (6 mm hose inside diameter) plastic tubing			
Output:	interface	interface or AAG	interface*	interface or AAG*
Serial interface:	x	x	x	x
AnalogOutput:	--	0 ... 1 V, freely adjustable (resolution 12 bit)	--	0 ... 1 V, freely adjustable (resolution 12 bit)
Power supply:	9 V battery, d.c. connector	9 V battery, d.c. connector	9 V battery, d.c. connector*	9 V battery, d.c. connector*
	suitable 9 V-battery, d.c. connector for external 10.5 ... 12 V direct voltage supply. (suitable power supply: GNG10/3000)			
Sensor adjustment:	digital offset and scale input	digital offset and scale input	digital offset and scale input	digital offset and scale input
Peak value memory:	--	≥1 ms	--	≥1 ms
Measuring cycle:	„slow“ 4 measurements / s	4 measurements / s	4 measurements / s	4 measurements / s
„fast“ (with filter)	--	≥1000 measurements / s	--	≥1000 measurements / s
„peak-detect“	--	≥1000 measurements / s The min- / max- value memory stored unfiltered pressure peaks ≥1 ms.	--	≥1000 measurements / s The min- / max- value memory stored unfiltered pressure peaks ≥1 ms.
Averaging function:	--	x	--	x
Battery life:	approx. 500 h	approx. 500 h (slow mode) approx. 120 h (fast = 1000 Hz)	approx. 500 h	approx. 500 h (slow mode) approx. 120 h (fast = 1000 Hz)
Operating conditions:	-25 ... +50 °C, 0 ... +95 % RH (non condensing)		-10 ... +50 °C, 0 ... 95 % RH (non condensing)	
Housing:	142 x 71 x 26 mm (H x W x D) (without pressure connection pin - pin approx. 16 mm protruding at front side of device), Impact-resistant ABS plastic housing, membrane keyboard, transparent panel, integrated pop-up clip			
Weight:	approx. 165 g	approx. 170 g	approx. 205 g (incl. leather case)	approx. 210 g (incl. leather case)
Scope of supply:	Device, battery, calibration protocol, manual	Device, battery, calibration protocol, manual	Device, battery, manual	Device, battery, manual

* Please refer to note to Ex-design types (p. 84)

Additional functions:

Serial interface: direct connection to RS232 or USB interface of a PC via electrically isolated interface adapter GRS 3100, GRS 3105 or USB 3100 N.

GMH 3181:

Low power logger mode: (only in measuring cycle „slow“) Only one measurement carried out at the end of the respective logger cycle. The battery life is considerably prolonged. For long-term recordings (e.g. leaktest).

Averaging function: integrates the meas. values during a selectable period of time and then calculates the average display value.

Controlling function: with the help of the switching module GAM3000 (optionally) electric equipment can be switched on/off or alarm monitored (see accessories)


Logger functions:

- manual: 99 data sets
- cyclic: 10000 data sets (max. 64 recording sequences), adjustable cycle time: 1 ... 3600 s

Note to the pressure unit selection: (information for all GMH31xx):

The choice of a specific pressure unit is possible, if its whole measuring range is displayable within the display of the device and the sensor is supporting these resolution.

FINEST MANOMETER / MANOMETER FOR OVER / UNDER PRESSURE AND PRESSURE DIFFERENCE

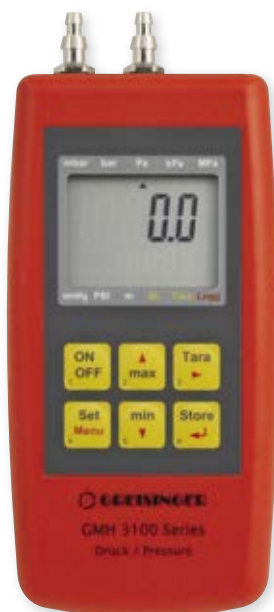**GMH 3161-002**

Art. no. 600469

Device -500.0 ... +500.0 Pa (± 500.0 Pa²)**GMH 3181-002**

Art. no. 600470

Device -500.0 ... +500.0 Pa (± 500.0 Pa², Logger)**GMH 3161-002-EX**

Art. no. 606685

Device type with Ex-protection

GMH 3181-002-EX

Art. no. 609063

Device type with Ex-protection

Specifications:**Measuring range:** -500.0 ... +500.0 Pa
(-5.000 ... +5.000 mbar)**Overload:** max. 250 hPa (mbar)**Resolution:** 0.1 Pa (0.001 mbar)**Additional pressure units:** kPa, PSI, mmHg, mH₂O**Accuracy: (typ. values)****Hysteresis and linearity:** 0.3 % FS**Temperature-influence from 0-50 °C:** 0.4 % FS**Option higher accuracy available:** no**Pressure connection:** 2

For type specific data please refer to page 90.

*1 measuring range possible by changing the pressure connection ports

*2 without changing the pressure connection ports

**GMH 3161-01**

Art. no. 600397

Device -100 ... 2500 Pa (± 2500 Pa¹)**GMH 3181-01**

Art. no. 600411

Device -100 ... 2500 Pa (± 2500 Pa¹), Logger**GMH 3161-07H**

Art. no. 600405

Device -1.00 ... 70.00 mbar (± 70.00 mbar¹)**GMH 3181-07H**

Art. no. 600417

Device -1.00 ... 70.00 mbar (± 70.00 mbar¹), Logger**GMH 3161-01-EX**

Art. no. 607458

Device type with Ex-protection

GMH 3181-01-EX

Art. no. 600796

Device type with Ex-protection

GMH 3161-07H-EX

Art. no. 610042

Device type with Ex-protection

GMH 3181-07H-EX

Art. no. 604074

Device type with Ex-protection

Specifications:	... - 01	... - 07H
Measuring range:	-100 ... 2500 Pa (-1.00 ... 25.00 mbar)	-1.00 ... +70.00 mbar
Overload:	max. 100 mbar	max. 1000 mbar
Resolution:	1 Pa (0.01 mbar)	0.01 mbar
Additional pressure units:	bar, kPa, PSI, mmHg, mH ₂ O	bar, Pa, kPa, PSI, mmHg, mH ₂ O
Accuracy: (typ. values)		
Hysteresis and linearity:	± 0.3 % FS	± 0.1 % FS
Temperature-influence from 0-50 °C:	± 0.4 % FS	± 0.4 % FS
Option higher accuracy available:	no	already integrated
Pressure connection:	2	

For type specific data please refer to page 90.

*1 measuring range possible by changing the pressure connection ports

**GMH 3161-07**

Art. no. 600400

Device -10.0 ... +350.0 mbar (± 350.0 mbar¹)**GMH 3181-07**

Art. no. 600413

Device -10.0 ... +350.0 mbar (± 350.0 mbar¹), Logger**GMH 3161-07B**

Art. no. 600402

Device -10.0 ... 420.0 mbar (-7.5 ... 315.0 mmHg)

GMH 3181-07B

Art. no. 600415

Device -10.0 ... 420.0 mbar (-7.5 ... 315.0 mmHg), Logger

GMH 3161-07-EX

Art. no. 604435

Device type with Ex-protection

GMH 3181-07-EX

Art. no. 601386

Device type with Ex-protection

GMH 3161-07B-EX

Art. no. 609064

Device type with Ex-protection

GMH 3181-07B-EX

Art. no. 604724

Device type with Ex-protection

Specifications:	... - 07	... - 07B
Measuring range:	-10.0 ... +350.0 mbar	-10.0 ... +420.0 mbar (-7.5 ... 315.0 mmHg)
Overload:	max. 1 bar	max. 1 bar
Resolution:	0.1 mbar	0.1 mbar (0.1 mmHg)
Additional pressure units:	bar, kPa, MPa, PSI, mmHg, mH ₂ O	bar, kPa, MPa, PSI, mmHg, mH ₂ O
Accuracy: (typ. values)		
Hysteresis and linearity:	± 0.2 % FS (± 0.1 % FS) ^{*3}	± 0.1 % FS
Temperature-influence from 0-50 °C:	± 0.4 % FS	± 0.4 % FS
Option higher accuracy available:	yes	already integrated
Pressure connection:	2	

For type specific data please refer to page 90.

*1 measuring range possible by changing the pressure connection ports

*2 without changing the pressure connection ports

*3 Option higher accuracy

Special design type:**Ex-protection (Ex II 2 G Ex ib IIC T4 Gb)**

Device type with Ex-protection

MANOMETER FOR OVER/UNDER PRESSURE AND PRESSURE DIFFERENCE



GMH 3161-13

Art. no. 600409

Device -100 ... 2000 mbar (± 2000 mbar¹)

GMH 3181-13

Art. no. 600421

Device -100 ... 2000 mbar (± 2000 mbar¹), with data logger

GMH 3161-13-EX

Art. no. 600647

Device type with Ex-protection

GMH 3181-13-EX

Art. no. 602263

Device type with Ex-protection

Specifications:

Measuring range: -100 ... 2000 mbar
(optional: -1000 ... 2000 mbar)

Overload: max. 4 bar

Resolution: 1 mbar

Additional pressure units: bar, kPa, MPa, PSI, mmHg, mH₂O

Accuracy: (typ. values)

Hysteresis and linearity: $\pm 0,2$ % FS; ($\pm 0,1$ % FS)^{*3}

Temperature-influence from 0 - 50 °C: $\pm 0,4$ % FS

Option higher accuracy available: ja

Pressure connection: 2

Option:

MB -1...2 BAR

Measuring range: -1000 ... 2000 mbar ^{*2}

For type specific data please refer to page 90.

^{*1} measuring range possible by changing the pressure connection ports

^{*2} without changing the pressure connection ports

^{*3} Option higher accuracy

VAKUUM- BZW. BAROMETER



FÜR ABSOLUT-
DRUCKMESSUNG

GMH 3161-12

Art. no. 600407

Device 0 ... 1300 mbar abs.

GMH 3181-12

Art. no. 600419

Device 0 ... 1300 mbar abs., with data logger

GMH 3161-12-EX

Art. no. 610043

Device type with Ex-protection

GMH 3181-12-EX

Art. no. 610044

Device type with Ex-protection

Specifications:

Measuring range: 0 ... 1300 mbar abs.

Overload: max. 4 bar abs.

Resolution: 1 mbar

Pressure units: mbar, bar, kPa, MPa, PSI, mmHg, mH₂O

Accuracy: (typ. values)

Hysteresis and linearity: $\pm 0,2$ % FS; ($\pm 0,1$ % FS)^{*3}

Temperature-influence from 0 - 50 °C: $\pm 0,4$ % FS

Option higher accuracy available: ja

Pressure connection: 1

Sonderfunktion:

SealLevel-Korrektur:

Der barometrische Luftdruck kann auch auf Meereshöhe „Null“ bezogen angezeigt werden. (Die Luftdruckkorrektur erfolgt durch Eingabe der Höhe über „Null“ in Meter)

For type specific data please refer to page 90.

^{*3} Option higher accuracy

Special design type:

Ex-protection (Ex II 2 G Ex ib IIC T4 Gb)

Device type with Ex-protection

COMPLETE SOLUTIONS



GMH 3161-07-WPD5

Art. no. 602684

Complete Solution incl. certificate of calibration ISO-WPD5 (5 points ascending / descending) and case GKK 3000.

GMH 3161-12-WPD5

Art. no. 602685

Complete Solution incl. certificate of calibration ISO-WPD5 (5 points ascending / descending) and case GKK 3000.

GMH 3161-13-WPD5

Art. no. 602686

Complete Solution incl. certificate of calibration ISO-WPD5 (5 points ascending / descending) and case GKK 3000.

ACCESSORIES

Options:

Higher sensor accuracy

by multi point calibration

Note: not possible for all device types!

ISO-WPD5

Art. no. 602514

ISO Certificate of calibration: 5 points increase, 5 points decrease.

ISO-WPD10

Art. no. 602565

ISO Certificate of calibration: 10 points increase, 10 points decrease.

Accessories and spare parts:

GNG 10/3000

Art. no. 600273

plug-in power supply

GRS 3100

Art. no. 601097

interface converter, RS232, electrically isolated

USB 3100 N

Art. no. 601092

interface converter, USB, electrically isolated

GDZ-01

Art. no. 601541

PVC-tube (5 bar) 6/4 (6 mm outside-Ø, 4 mm inside-Ø)

GDZ-08

Art. no. 601555

Double adapter for 6/4 tube to 6/4 tube

GDZ-18

Art. no. 601576

tube clamp for 6/4 tube

GDZ-21

Art. no. 601582

T-piece for 6/4 tubes

GKK 3000

Art. no. 601048

case (275 x 229 x 83 mm) with cut-outs for GMH3xxx for miscellaneous accessories p.r.t. page 90



FINE MANOMETER



FOR OVER/UNDER PRESSURE
OR PRESSURE DIFFERENCE

GDH 200-07

Art. no. 601254

0.00 ... 19.99 / 199.9 mbar (± 199.9 mbar) ^{*1}

Functions:

- Differential and relative pressure measurement
- Autorange
- Excellent zero point stabilisation
- Manual slope adjustment
- 4 selectable measuring units: Pa, mbar, mmHg, PSI
- automatic off-function: 1 ... 120 min

Specifications:

Measuring range:	0.00 ... 19.99 or 20.0 ... 199.9 mbar (hPa) 0.00 ... 19.99 or 20.0 ... 150.0 mmHg 0.000 ... 1.999 PSI / 0 ... 1999 Pa
Resolution:	automatic change 0.1 / 0.01
Overload:	max. 500 mbar
Accuracy:	(at nominal temperature = 25 °C and automatic zero point-adjustment)
Measuring range: up to 200 mbar	± 0.2 % f.s. hysteresis and linearity, ± 0.4 % f.s. temperature drift from 0 ... 50 °C
Measuring range: up to 20 mbar	± 1 % f.s. hysteresis and linearity, ± 2 % f.s. temperature drift from 0 ... 50 °C
Sensor:	piezoresistive relative pressure sensor
Pressure connection:	2 pressure port sockets made of nickel-plated brass, for pressure tubings 6 x 1 mm (4 mm inner-diameter)
Working conditions:	-25 ... +50 °C, 0 ... 95 % RH (non-condensing)
Display:	3½ digit LCD display, approx. 13 mm high
Pushbuttons:	3 membrane keys
Power supply:	9 V battery
Battery life:	approx. 1200 h
Housing:	impact resistant ABS plastic housing, approx. 106 x 67 x 30 mm (H x W x D) +16 mm pressure port sockets
Weight:	approx. 135 g (incl. battery)
Zero point-adjustment:	automatically
Slope-adjustment:	manually
Scope of supply:	Device, battery, calibration protocol, manual

^{*1} measuring range possible by changing the pressure connection ports
Tubes, clamps, adapters, accessories, etc. p.r.t. page 86

MANOMETER



FOR OVER/UNDER PRESSURE
OR PRESSURE DIFFERENCE

GDH 200-13

Art. no. 601256

0.0 ... 199.9 / 1999 mbar (± 1999 mbar) ^{*1}

Functions:

- Differential and relative pressure measurement
- Autorange
- Excellent zero point stabilisation
- Manual slope adjustment
- 3 selectable measuring units: mbar, mmHg, PSI
- automatic off-function: 1 ... 120 min

Specifications:

Measuring range:	0.0 ... 199.9 or 200 ... 1999 mbar (hPa) 0.0 ... 199.9 or 200 ... 1500 mmHg 0.00 ... 19.99 PSI
Resolution:	automatic change 1 / 0.1
Overload:	max. 4000 mbar
Accuracy:	(at nominal temperature = 25 °C and automatic zero point-adjustment)
Measuring range: up to 2000 mbar	± 0.2 % f.s. hysteresis and linearity, ± 0.4 % f.s. temperature drift from 0 ... 50 °C
Measuring range: up to 200 mbar	± 1 % f.s. hysteresis and linearity, ± 2 % f.s. temperature drift from 0 ... 50 °C
Sensor:	piezoresistive relative pressure sensor
Pressure connection:	2 pressure port sockets made of nickel-plated brass, for pressure tubings 6 x 1 mm (4 mm inner-diameter)
Working conditions:	-25 ... +50 °C, 0 ... 95 % RH (non-condensing)
Display:	3½ digit LCD display, approx. 13 mm high
Pushbuttons:	3 membrane keys
Power supply:	9 V battery
Battery life:	approx. 1200 h
Housing:	impact resistant ABS plastic housing, approx. 106 x 67 x 30 mm (H x W x D) +16 mm pressure port sockets
Weight:	approx. 135 g (incl. battery)
Zero point-adjustment:	automatically
Slope-adjustment:	manually
Scope of supply:	Device, battery, calibration protocol, manual

^{*1} measuring range possible by changing the pressure connection ports
Tubes, clamps, adapters, accessories, etc. p.r.t. page 86

VAKUUM- / BAROMETER OR MANOMETER



FOR ABSOLUTE PRESSURE

GDH 200-14

Art. no. 601258

0 ... 11000 mbar abs.

Functions:

- Sea level-adjustment possible
- suitable for relative pressure measurement (-1 ... 10 bar) by use the zero function
- Manual slope and offset adjustment
- 4 selectable measuring units: mbar, mmHg, bar, PSI
- automatic off-function: 1 ... 120 min

Specifications:

Measuring range:	0 ... 11000 mbar (hPa) abs. 0 ... 8250 mmHg abs. 0.000 ... 11.000 bar abs. 0.00 ... 160.00 PSI abs.
Resolution:	1 mbar, 1 mmHg, 0.001 bar, 0.02 PSI
Overload:	max. 13 bar abs.
Accuracy: (at nominal temperature = 25 °C)	± 3 mbar or 0.10 % of m.v. (whichever is higher); ± 0.3 % f.s. temperature drift from 0 ... 50 °C
Sensor:	piezoresistive absolute pressure sensor
Pressure connection:	2 pressure port sockets made of nickel-plated brass, for pressure tubings 6 x 1 mm (4 mm inner-diameter)
Working conditions:	-25 ... +50 °C, 0 ... 95 % RH (non-condensing)
Display:	4½ digit LCD display, approx. 12 mm high
Pushbuttons:	3 membrane keys
Power supply:	9 V battery
Battery life:	approx. 7500 h
Sea level correction:	Barometric values can be converted to sea level (therefore the input of the current altitude is needed).
Housing:	impact resistant ABS plastic housing, approx. 106 x 67 x 30 mm (H x W x D) +16 mm pressure port sockets
Weight:	approx. 135 g (incl. battery)
Zero point-adjustment:	manually
Slope-adjustment:	manually
Scope of supply:	Device, battery, calibration protocol, manual

Tubes, clamps, adapters, accessories, etc. p.r.t. page 86

BAROMETER



GPB 3300

Art. no. 600129

300.0 ... 1100.0 mbar abs.

Functions:

- Manual offset and slope adjustment
- Sea level-adjustment possible
- 2 measuring units selectable: mbar, mmHg
- Auto-off-function: 1 ... 120 min

Specifications:

Measuring range: 300.0 ... 1100.0 mbar (hPa) abs.
225.0 ... 825.0 mmHg abs.

Max. Overload: 4000 mbar or 3000 mmHg

Accuracy: (at nominal temperature) ± 2.0 mbar (typ. bei 0 ... 50 °C)

Sensor: absolute pressure sensor, integrated in housing

Nominal temperature: 25 °C

Operating temperature: -25 ... +50 °C, 0 ... 95 % RH (non-condensing)

Display: 4½-digit, 12 mm high LCD-display

Pushbuttons: 3 membrane key for ON/OFF, min-/max-value memory, tara, etc.

Power supply: 9 V battery

Battery life: approx. 5000 h

Zero point-adjustment: manually

Slope-adjustment: manually

Sea level correction: Barometric values can be converted to sea level (therefore the input of the current altitude is needed).

Housing: impact resistant ABS housing

Dimensions: approx. 106 x 67 x 30 mm (H x W x D)

Weight: approx. 135 g (incl. battery)

Scope of supply: Device, battery, manual

Accessories and spare parts:

GKK 252

Art. no. 601056

small case (235 x 185 x 48 mm) with foam lining

GB 9 V

Art. no. 601115

spare battery

ALTIMETER / BAROMETER / THERMOMETER / PRECISION BAROMETER



GTD 1100

Art. no. 600132

300.0 ... 1100.0 mbar abs. + Altimeter

General:

Device for simple determination of a building size (steeple, skyscrapers, bridges, etc.)

Application:

hiking, hang gliding, cycling, motorsports, etc.

Specifications:

Measuring range:

Temperature: -10.0 ... +50.0 °C. or
14.0 ... +122.0 °F.

Pressure: 300.0 ... 1100.0 mbar abs. or
225.0 ... 825.0 mmHg abs.

High: -500 ... -200 m, res. 1 m or
-1640 ... -655 ft, res. ~5 ft
-200 ... +2000 m, res. 0.5 m or
-654 ... +1999 ft, res. ~2 ft
2000 ... 9000 m, res. 1 m or
2000 ... 19999 ft, res. ~5 ft

Measuring units: hPa / mbar, mmHg, °C, °F, m, ft

Max. Overload: pressure: 4000 mbar or 3000 mmHg

Accuracy: (at nominal temperature = 25 °C)

Temperature: $\pm 1\%$ FS ± 1 digit

Absolute pressure: ± 1.5 mbar ± 1 digit (750 ... 1100 mbar), with certificate of calibration: ± 0.5 mbar ± 1 digit

Sensor: absolute pressure sensor, integrated in housing

Operating conditions: -10 ... +50 °C; 0 ... 80 % RH (non condensing)

Storage temperature: -20 ... +70 °C

Measuring frequency: 1 measuring / s

Display: approx. 12 mm high, 4½-digit LCD-display

Sum function: The covered altitude can be displayed (ascent, descent, total)

Tendency indicator: Air pressure rising/falling

Sea level correction: Barometric values can be converted to sea level (therefore the input of the current altitude is needed).

Pushbuttons: keypad (3 push-buttons) for On/off, min/max-value, tara-function, zero-, slope-, and sea level-adjustment slide switch for unit selection.

FOR PROFESSIONAL USAGE IN MEASUREMENT
TECHNOLOGY AS WELL AS IN SPARE TIME SPORTS

Power supply: 9 V battery

Battery life: approx. 6.000 h

System notifications: permanent self-diagnosis and error indication

Housing: impact resistant ABS housing

Dimensions: approx. 106 x 67 x 30 mm (H x W x D)

Weight: approx. 135 g (incl. battery)

Scope of supply: Device, battery, manual

Functions:

- manual offset and slope-adjustment
- sea level-adjustment possible
- tendency-meter, summing-function (ascendency, descendency, overall)
- over 6.000 operating hours

Accessories and spare parts:

GB 9 V

Art. no. 601115

Spare battery

ISO-WPD 5

Art. no. 602514

5 points rising, 5 points falling

GKK 252

Art. no. 601056

Small case (235 x 185 x 48 mm) with foam lining

Calibration certificate, p.r.t. page 15

**HIGHLIGHTS:**

- Acoustic normative IEC61672, IEC 61260, IEC61094-4

HD-2010-UC-1

Art. no. 700060

Integrating sound level meter

General:

HD-2010-UC-1 is an integrating portable sound level meter performing statistical analysis. The instrument has been designed combining maximum low cost and simplicity of use. Attention has been paid to the possibility of adjusting the instrument and adding options at any time to the HD-2010-UC-1 so to extend its applications. The user can upgrade the firmware directly by means of the Noise Studio programme supplied with the instrument. HD-2010-UC-1 is equipped with a backlit graphic display.

Application:

- Assessment of the environmental noise level
- Optional "advanced data logging"
- Optional capture and analysis of sound events
- Statistical analysis with the calculation of 3 percentile level and optional full statistical analysis
- Noise monitoring ("Advanced data logger" option required)
- Identification of impulsive noises
- Measurements in workplaces (Analysis of the noise and vibrations exposure)
- Selection of personal protective equipment (SNR and HML methods)
- Production quality control
- Measurement of machine noise, sound power measurements
- Vehicles noise emission

With HD-2010-UC-1 sound level meter it is possible to measure the sound pressure level by programming 3 parameters with the possibility of freely selecting the frequency weightings and the time constants. The measured sound levels can be recorded in the large non-volatile memory in order to be transferred to a PC using the supplied Noise Studio software package.

The class 1 HD-2010-UC-1 sound level meter with the "Advanced Data Logger" option is suitable for performing noise monitoring and acoustic mapping and, also assessments of the acoustic climate with capture and analysis of sound events function. When measuring traffic noise in the proximity of airports, railways and roads, the sound level meter can be used as a multi-parameter sound recorder, combining statistical analyzer features. Remote electrical calibrations and diagnostic tests can be executed by using its remote control capabilities.

Specifications:

½" Microphone:	UC52 free field, pre-polarized, condenser type
Dynamic range:	30 dBA ... 143 dB Peak
Linearity range:	80 dB
Acoustic Parameters:	Spl, L_{eq} , L_{eq1} , SEL, $L_{EP,d}$, L_{max} , L_{min} , L_{pk} , Dose, L_n
Frequency weightings:	simultaneous A, C, Z (only C and Z for L_{pk})
Time weightings:	simultaneous FAST, SLOW, IMPULSE
Integration:	from 1 s ... 99 h with erasing function (Back-Erase)
Statistical Analysis:	It displays up to 3 percentile levels, from L_1 to L_{99} Probability distribution and percentile level calculation from L_1 to L_{99} • Parameter: L_{FIR} , L_{eq} , L_{pk} weighted A, C or Z (only C or Z for L_{pk}) • Sampling frequency: 8 samples/s • Classification: Classes of 0.5 dB
Display:	Graphic LCD backlit display 128 x 64 • 3 parameters in numeric format
Memory:	• 4 MB internal, memory for more than 500 records.
Input / Output:	• RS232 serial and USB interfaces • AC output (LINE) • DC output

PC Programs:

Noise Studio (provided with the instrument): PC interface for data download, set up and instrument management.
Licensed software modules to be enabled by hardware key.
• NS4 "Monitor" module. PC based real time acquisition.
Synchronized audio recording. Remote monitoring and data capture. Remote connection also via Modem. The program allows programming of measurements and calibrations with timer and performs events audio recording with programmable triggers levels.

Operating conditions:

• Working temperature -10 ... +50 °C, 25 ... 90 % RH (without condensation), 65 ... 108 kPa. Protection degree: IP64

Power supply:

• 4 alkaline or rechargeable NiMH type AA batteries or external 9 ... 12 V dc 300 mA

Dimensions:

445 x 100 x 50 mm equipped with preamplifier (H x W x D)

Scope of supply:

Class 1 sound level meter HD-2010-UC-1, HD2010PNE2 pre-amplifier, UC52/1 free field prepolarized microphone, windscreen, USB connection cable. Noise Studio PC software, carrying case and paper instruction manual. Supplied with DAKS individual calibration Certification, according to IEC 61672.

NECESSARY ACCESSORY:**HD-2020**

Art. no. 700062

Class 1 sound calibrator (p.r.t. page 96)

Accessories:**HD-2110-USB**

Art. no. 700038

serial USB cable for PC connection

SWD-10

Art. no. 700039

Stabilized mains power supply $V_{in}=100 \dots 230$ V AC / $V_{out}=12$ V DC / 1.000 mA**CPA/10**

Art. no. 700061

10 m microphone extension cable

HD-40-1


Art. no. 700056

Portable thermal serial printer with 57 mm paper rolls equipped with SWD-10 power supply

HD2110-RS

Art. no. 700057

M12 - 9-pole D Sub connectors cable for connecting the printer to instruments with M12 connector

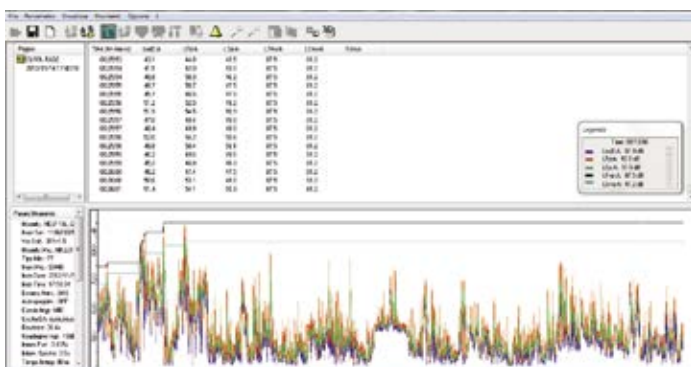

Noise Studio: NS4 "Monitor" module; PC based noise acquisition with synchronized audio recording (for later playback).

Noise Studio NS4

Monitor' module (demo version in scope of supply)

General:

This software module allows to control the sound level meter with PC in remote location. The main features are:

- Real time display of acquired data, in graphical and tabular form
- Possibility to remotely connect to the sound level meter via modem
- Acquisition of sound level data directly into the mass memory of the PC (monitor function)
- Management of diagnostic and calibration functions
- Automatic acquisition and monitoring programme
- Possibility to log synchronized audio along with the sound level meter measurements, by using the easy trigger function

IMPORTANT INFORMATION:

Device supply with calibration certificate. Customer must be specified when ordering.

ACOUSTIC CALIBRATOR



HIGHLIGHTS:

- The 1000 Hz frequency allows calibrating sound level meters with any weighting
- Independent of atmospheric pressure
- The 114 dB sound level allows performing calibrations even in high background noise environments
- Simple to use

HD-2020

HD-2020

Art. no. 700062

Acoustic calibrator

General:

The HD-2020 sound level calibrator is a portable, battery operated sound source, suitable for sound level meters (portable and laboratory) and acoustic stations. It allows calibrating 1/2" microphones with mechanical dimensions according to IEC 61094-1. The calibration pressure levels of 94 dB and 114 dB can be selected by the keypad. If the microphone is absent or not inserted correctly into the calibrator cavity, the sound level will blink on the display. The clock/calendar allows you to set the number of years and months of validity of the calibration from the date of adjusting: at the expiration time, an appropriate symbol flashes on the display.

Specifications:

Coupling cavity:	for standard 1/2" microphones (12.7 ± 0.03 mm) according to IEC 61094-1 and IEC 61094-4
Frequency:	1.000 Hz
Frequency tolerance:	1 % in the range -10 ... +50 °C and 10 ... 90 % RH
Sound pressure level:	94.0 dB and 114.0 dB ± 0.2 dB at 1 kHz (referred to 101.3 kPa, 23 °C ± 3 °C and 65 % RH)
Reference conditions:	20 °C, 50 % RH, 101,3 kPa, 10 mm ³ cartridge volume
Reaction speed:	10 s
Total distortion:	<1 %

Ambient condition influence

Temperature and humidity influence:	<0.3 dB in the range -10 ... +50 °C and 10 ... 90 % RH
Static pressure influence:	<0.1 dB in the range -65 ... 108 kPa

Operating conditions

Working temperature:	-10 ... +50 °C
Relative humidity:	≤90 % RH
Storage temperature:	-25 ... +70 °C
Microphone equivalent volume:	5 ... 250 mm
Power supply:	9 V alkaline battery IEC type 6LR61. 9 V rechargeable batteries are also allowed.
9 V battery autonomy:	48-hour continuous functioning with good quality alkaline batteries
Display:	3 1/2 LCD, battery symbol
Watch / date-indicator:	internal with 3 V lithium buffer battery
Case material:	ABS
Dimensions:	83 x 43 x 53 mm (H x W x D)
Protection degree:	IP64
Effects of electro-magnetic fields:	<0.3 dB
Scope of supply:	HD-2020 calibrator, 1x 9 V alkaline battery, manual. ACCREDIA individual calibration certification included.

IMPORTANT INFORMATION:

Device supply with calibration certificate. Custome must be specified when ordering.

PHOTO-RADIOMETER



HIGHLIGHTS:

- Measurement of many different light values, lighting strength, luminance, radiation strength
- Wide range of sensors, interchangeable sensors

ILLUMINANCE, LUMINANCE PHOTONS FLOW UVA-, UVB-, UVC-IRRADIANCE IRRADIANCE IN SPECTRAL BAND OF BLUE LIGHT GLOBAL SOLAR RADIATION

HD-2302-0

Art. no. 700063

Photo-radiometer

General:

It measures illuminance, luminance, PAR and irradiance (across VIS-NIR, UVA, UVB and UVC spectral regions or measurement of irradiance effective according to the UV action curve). The probes are equipped with the SICRAM automatic detection module: in addition to detection, the unit of measurement selection is also automatic. The factory calibration data are already memorized inside the instruments.

Application:

Measurement of lighting strength and radiation strength in workplaces with high exposure and/or adjacent traffic routes and work stations. Additional applications for museum and not destructive testing, for tanning / aesthetic centers, photovoltaic and aging chamber

Specifications:

Instrument

Dimensions:	140 x 88 x 38 mm (H x W x D)
Material:	ABS
Display:	2 x 4 1/2 digits plus symbols - 52 x 42 mm (visible area)
Operating conditions	
Working temperature:	-5 ... +50 °C
Storage temperature:	-25 ... +65 °C
Working relative humidity:	0 ... 90 % RH without condensation
Protection degree:	IP67

Power

Batteries:	3 1.5 V type AA batteries
Autonomy:	200 h with 1800 mAh alkaline batteries
Power absorbed with the instrument off:	20 µA
Measuring unit:	lux - fcd - µmol/m ² ·s - cd/m ² - W/m ² - µW/cm ² - µW/lumen
Connections:	Input module for the probes 8-pole male DIN45326 connector
Scope of supply:	Instrument HD-2302-0, 3 1.5 V alkaline batteries, manual, case. The probes must be ordered separately.

Accessories:

LP471-PHOT
LP471-LUM2
LP471-PAR
LP471-UVA
LP471-UVB
LP471-UVC
LP471-P-A
LP471 BLUE
LP SILICON-PYRA

Specification see following pages

PHOTOMETRIC AND RADIOMETRIC PROBES



ILLUMINANCE

LP-471-PHOT

Art. no. 700064

Probe for the measure of Illuminance

Application:	
Measurement of lighting strength at workplaces / work stations, traffic and escape routes	

Specifications:	
Measuring range (lux):	0.10 ... 199.99 ... 1999.9 ... 19999 ... 199.99-10 ³
Resolution (lux):	0.01 0.1 1 0.01-10 ³
Spectral range:	in agreement with standard photopic curve V(λ)
α (temp. coefficient) f ₆ (T):	<0.05 % K
Calibration uncertainty:	<4 %
f ₁ (in agreement with photopic response V(λ)):	<6 %
f ₂ (response according to the cosine law):	<3 %
f ₃ (linearity):	<1 %
f ₄ (instrument reading error):	<0.5 %
f ₅ (fatigue):	<0.5 %
Class:	B
Working temperature:	0 ... 50 °C



LUMINANCE

LP-471-LUM 2

Art. no. 700065

Probe for the measure of Luminance

General:	
Spectral response according to the photopic curve, angular field 2°.	
Measuring range: 1.0 cd / m ² ... 2.000-10 ³ cd / m ² .	

Application:	
Sensor measures luminance like a human eye, e. g. monitors and lamps, etc. Diaphanoscop, X Ray plates reader, PC monitors light radiations and reflection by white surfaces	

Specifications:	
Measuring range (cd / m ²):	1.0 ... 1999.9 ... 19999 ... 199.99-10 ³ ... 1999.9-10 ³
Resolution (cd / m ²):	0.1 1 0.01-10 ³ 0.1-10 ³
Optical angle:	2°
Spectral range:	in agreement with standard photopic curve V(λ)
α (temp. coefficient) f ₆ (T):	<0.05 % K
Calibration uncertainty:	<5 %
f ₁ (in agreement with photopic response V(λ)):	<8 %
f ₃ (linearity):	<1 %
f ₄ (instrument reading error):	<0.5 %
f ₅ (fatigue):	<0.5 %
Class:	C
Drift after 1 year:	<1 %
Working temperature:	0 ... 50 °C
Reference Standards:	CIE n.69 – UNI 11142



PHOTONS FLOW

HIGHLIGHTS:

- Photosynthesis activity, radiation (PAR) measure, langley radiation measurement

LP-471-PAR

Art. no. 700066

Quanten-radiometrische Sonde

General:	
For measuring the photons flow in the chlorophyll field PAR (Photosynthetically active radiation 400 ... 700 nm), μmol m ⁻² s ⁻¹ measure, cosine correction diffuser.	
Measuring range 0.10 μmol m ⁻² s ⁻¹ ... 10-10 ³ μmol m ⁻² s ⁻¹	

Application:	
Plants, agriculture, greenhouses	

Specifications:	
Measuring range (μmol·m ⁻² s ⁻¹):	0,10 ... 199,99 200,0 ... 1 999,9 2000 ... 10000
Resolution (μmol·m ⁻² s ⁻¹):	0.01 0.1 1
Spectral range:	400 ... 700 nm
Calibration uncertainty:	<5 %
f ₂ (response according to the cosine law):	<6 %
f ₃ (Linearity):	<1 %
f ₄ (instrument reading error):	±1 digit
f ₅ (fatigue):	<0.5 %
Drift after 1 year:	<1 %
Working temperature:	0 ... 50 °C

HIGHLIGHTS:

- Control of UV lamps in cosmetic tanning systems
- To check the control of cosmetic tanning systems
- Measurement of UVA radiation strength with penetration testing according to DIN EN ISO 3059 (crack/surface testing)

LP-471-UVA

Art. no. 700067

Probe for the measure of UVA irradiance

General:	
Radiometric probe for measuring the irradiance in the UVA spectral range 315 ... 400 nm, peak at 360 nm, quartz diffuser for cosine correction.	
Measuring range: 1.0-10 ⁻³ W / m ² ... 2000 W / m ² .	

Application:	
Timing Light to ward off eye problems. For casting and welding control, Polymerization of varnishes, resins, adhesives	

Specifications:	
Measuring range (W/m ²):	1.0-10 ⁻³ ... 999.9-10 ⁻³ 1 000 ... 19999 20.00 ... 199.99 200.0 ... 1 999.9
Resolution (W/m ²):	0.1-10 ⁻³ 0.001 0.01 0.1
Spectral range:	315 ... 400 nm (Spitze 360 nm)
Calibration uncertainty:	<5 %
f ₃ (linearity):	<1 %
f ₄ (instrument reading error):	±1 Stelle
f ₅ (fatigue):	<0.5 %
Drift after 1 year:	<2 %
Working temperature:	0 ... 50 °C

PHOTOMETRIC AND RADIOMETRIC PROBES



HIGHLIGHTS:

- Psoriasis light treatment by UVB lamps

UVB IRRADIANCE

LP-471-UVB

Art. no. 700068

Probe for the measure of UVB irradiance

General:

Radiometric probe for measuring the irradiance in the UVB spectral range 280 ... 315 nm, peak at 305 ... 310 nm, quartz diffuser for cosine correction.
Measuring range: $1.0 \cdot 10^{-3} \text{ W/m}^2$... 2000 W/m^2 .

Application:

Polymerization of varnishes, resins, adhesives. Quality control by UV Lamps. For Offset and lithography & electronic, Casting and welding control, Timing light to ward off eye problems

Specifications:

Measuring range (W/m²):	$1.0 \cdot 10^{-3}$... $999.9 \cdot 10^{-3}$			
	1 000 ... 19 999			
	20 00 ... 199 99			
	2000 ... 1 999.9			
Resolution (W/m²):	$0.1 \cdot 10^{-3}$	0.001	0.01	0.1
Spectral range:	280 ... 315 nm (Peak 305 ... 310 nm)			
Calibration uncertainty:	<5 %			
f₃ (linearity):	<2 %			
f₄ (instrument reading error):	±1 digit			
f₅ (fatigue):	<0.5 %			
Drift after 1 year:	<2 %			
Working temperature:	0 ... 50 °C			



HIGHLIGHTS:

- Control of UV Lamps during pasteurization, air and water sterilization

UVC IRRADIANCE

LP-471-UVC

Art. no. 700069

Probe for the measure of UVC irradiance

General:

For measuring in the UVC spectral range 220 ... 280 nm, peak at 260 nm, quartz diffuser for cosine correction.
Measuring range: $1.0 \cdot 10^{-3} \text{ W/m}^2$... 2000 W/m^2 .

Specifications:

Measuring range (W/m²):	$1.0 \cdot 10^{-3}$... $999.9 \cdot 10^{-3}$			
	1 000 ... 19 999			
	20.00 ... 199.99			
	200.0 ... 1 999.9			
Resolution (W/m²):	$0.1 \cdot 10^{-3}$	0.001	0.01	0.1
Spectral range:	220 ... 280 nm (Peak 260 nm)			
Calibration uncertainty:	<5 %			
f₃ (linearity):	<1 %			
f₄ (instrument reading error):	±1 digit			
f₅ (fatigue):	<0.5 %			
Drift after 1 year:	<2 %			
Working temperature:	0 ... 50 °C			



IRRADIANCE IN SPECTRAL BAND OF BLUE LIGHT

LP-471-BLUE

Art. no. 700070

Probe for the measure of irradiance in spectral band of blue light

General:

The radiometric probe LP471-BLUE measures irradiance (W/m^2) in spectral band of blue light. The probe consists of a photodiode plus an appropriate filter and it is provided with diffuser for proper measure in accordance with the cosine law.

Application:

The spectral response curve of the probe allows to measure the radiation effective for damages caused by blue light (curve $B(\lambda)$) according to the standards ACGIH / ICNIRP in the spectral range from 380 ... 550 nm. The radiation optics in this portion of the spectrum can produce photochemical damage to the retina. Another field of application is the monitoring of the probe irradiance from blue light used in the treatment of neonatal jaundice.

Specifications:

Measuring range (W/m²):	$1.0 \cdot 10^{-3}$... $999.9 \cdot 10^{-3}$			
	1 000 ... 19 999			
	20.00 ... 199.99			
	200.0 ... 1 999.9			
Resolution (W/m²):	$0.1 \cdot 10^{-3}$	0.001	0.01	0.01
Spectral range:	380 ... 550 nm. Action curve for damages of Blue light $B(\lambda)$			
Calibration uncertainty:	<10 %			
f₂ (response according to the cosine law):	<6 %			
f₃ (linearity):	<3 %			
f₄ (instrument reading error):	±1 digit			
f₅ (fatigue):	<0.5 %			
Drift after 1 year:	<2 %			
Working temperature:	0 ... 50 °C			

PHOTOMETRIC AND RADIOMETRIC PROBES



HIGHLIGHTS:

- Non destructive material measurement by ISO 3059:2001

BELEUCHTUNGSSTÄRKE UND
UVA-BESTRAHLUNGSSTÄRKE

LP-471 P-A

Art. no. 700071

Combined probe LP 471 P-A with two sensors for the measure of illuminance and UVA irradiance

General:

Combined probe for measuring illuminance (lux), with standard photopic response, and irradiance ($\mu\text{W}/\text{cm}^2$) in the UVA spectral range (315 ... 400 nm, with peak at 360 nm). Both the sensors are equipped with diffuser for the correction according to the cosine law. Illuminance measuring range: 0.10 ... 200·10³ lux. Irradiance measuring range: 1.0 mW / m² ... 2 000 W / m². This probe provides the ratio between UVA irradiance and illuminance in $\mu\text{W}/\text{lumen}$ (quantity of interest in museums). The probe is equipped with SICRAM module and cable 2 m long.

Application:

Lighting conditions and protection from UVA radiation in museums. Measurement of lighting strength and UVA radiation strength with penetration testing according to DIN EN ISO 3059 (crack/surface testing), ...

Specifications Illuminance:

Measuring range (lux):	0.10 ... 199.99	...1 999.9	...19 999	...199.99·10 ³
Resolution (lux):	0.01	0.1	1	0.01·10 ³
Spectral range:	in agreement with standard photopic curve V(λ)			
α (temp. coefficient) f_6 (T):	<0,05 % K			
Calibration uncertainty:	<4 %			
f'_1 (in agreement with photopic response V(λ)):	<6 %			
f_2 (response according to the cosine law):	<3 %			
f_3 (linearity):	<1 %			
f_4 (instrument reading error):	<0.5 %			
f_5 (fatigue):	<0.5 %			
Class:	B			
Drift after 1 year:	<1 %			
Working temperature:	0 ... 50 °C			
Reference standards:	CIE n. 69 – UNI 11142			

Specifications UVA Irradiance:

Measuring range ($\mu\text{W}/\text{cm}^2$):	0.10 ... 199.99	...1 999.9	...19 999	...199.99·10 ³
Resolution ($\mu\text{W}/\text{cm}^2$):	0.01	0.1	1	0.01·10 ³
Spectral range:	315 ... 400 nm (Peak 360 nm)			
Calibration uncertainty:	<5 %			
f_2 (response according to the cosine law):	<6 %			
f_3 (linearity):	<1 %			
f_4 (instrument reading error):	± 1 digit			
f_5 (fatigue):	<0.5 %			
Drift after 1 year:	<2 %			
Working temperature:	0 ... 50 °C			



GLOBAL SOLAR RADIATION

LP-SILICON-PYRA

Art. no. 700072

Probe for the measure of global solar radiation

General:

Solarmeter with silicon photodiode for measuring the global solar irradiance, diffuser for cosine correction. Spectral range 400 ... 1100 nm. Measuring range: 1.0·10⁻³ ... 2000 W / m². The probe is equipped with a SICRAM module and a 5 m cable.

Application:

Efficiency control of photovoltaic panels in home and industrial solar power applications.

Specifications:

Measuring range (W / m ²):	1.0·10 ⁻³ ... 999.9·10 ⁻³	1.000 ... 19.999	20.00 ... 199.99	200.0 ... 1 999.9
Resolution (W / m ²):	0.1·10 ⁻³	0.001	.01	0.01
Spectral range:	400 ... 1.100 nm			
Calibration uncertainty:	<3 %			
f_2 (response according to the cosine law):	<3 %			
f_3 (linearity):	<1 %			
f_4 (instrument reading error):	± 1 digit			
f_5 (fatigue):	<0.5 %			
Drift after 1 year:	<2 %			
Working temperature:	0 ... 50 °C			

3-CHANNEL MULTI-FUNCTION DATA LOGGER




HIGHLIGHTS:

- Three independent sensor inputs with automatic probe recognition
- Graphic colour display
- Data logger with SD card
- Automatic creation of PDF logs
- Mobility with rechargeable batteries



connections

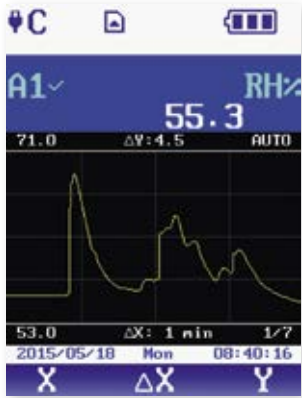

HD 31

Universal 3-channel multi-function data logger with graphic display

General:

The HD 31 is a universal data logger with the capacity to connect up to 3 "SICRAM" probes. All relevant data (serial number, type, calibration data) is stored in the SICRAM plugs, so the probes can be connected in any arbitrary manner. The connected probe is recognised automatically by the HD 31. Additional variables can be derived from the measured values. For example, the dewpoint temperature, wet-bulb temperature, absolute humidity, etc. can be calculated from the temperature and humidity. There is a total of 36 different measured variables available. Large-format colour display for presentation of three measurements in numerical form or a real-time graphic. The data is stored in CSV format on an SD card (buffer storage for several months, even if multiple measured variables are logged each second). The HD 31 can be connected via the optional USB cable directly to a PC and is recognised as a mass storage device. The HD 31 also generates automatic PDF logs, which are also stored on the SD card.

Application:

The variety of measuring sensors and the derived measured variables enable a wide spectrum of applications, such as heating, ventilation and air conditioning or clean room applications. The following measuring variables can be detected:

- Temperature
- Relative humidity
- Pressure (absolute, relative or differential pressure)
- Air speed
- Lighting strength (Lux)
- Irradiance (W/m²)
- CO₂

Numerous variables can be calculated from the aforementioned measurements and stored. This includes, for example, the absolute humidity in g/m³ (from temperature and relative humidity) or with measurement in ventilation ducts of the volume flow (from the speed and the dimensions of the ventilation duct), etc

There are also SICRAM modules available for connection of external sensors with analogue output signals:

- VP 473:**
SICRAM plug module for signal recording of external measuring transducers with voltage output, measuring range ±20 VDC, input impedance 1 MΩ
- IP 472:**
SICRAM plug module for signal recording of external measuring transducers, measuring range 0 ... 24 mA, input impedance 25 Ω
- VP 472:**
SICRAM plug module for connection of pyranometers and albedometers with non-amplified signal output (adjustable sensitivity from 5 ... 30 µV per W/m²)

Our product data sheet available online at www.ghmgroup.de provides a complete overview

Technische Daten (Grundgerät HD31):	
Power supply:	Rechargeable internal 3.7 V Lithium battery, capacity 2250 mA/h, JST 3-pole connector. (optional SWD05 power supply)
Battery autonomy:	18 hours of continuous operation with three Pt100 probes (The effective autonomy depends on the number and type of connected sensors)
Logging interval:	1, 5, 10, 15, 30 s; 1, 2, 5, 10, 15, 20, 30 min; 1 h
Storage capacity:	SD memory card with capacity up to 4 GB. The logging duration depends on the number of logged quantities and on the capacity of the SD card employed.
Inputs:	3 SICRAM connections (8-pin, DIN 45326) for connection of measuring sensors with intelligent SICRAM plugs (up to 36 measured variables)
Accuracy:	±0.02 % of the measure (Based on HD31 basic device)
Clock stability:	1 min / month maximum drift
Display:	Color graphic LCD. Visible area 43 x 58 mm
USB Connection:	mini USB connector, USP Port (HID)



Hard protective rubber casing (55 SHORE) with stand and magnet for use in harsh environments

3-CHANNEL MULTI-FUNCTION DATA LOGGER

RS232C connection:	1 serial RS232C output with RJ12 connector for connecting to a serial printer
Auto-Off:	Configurable after 2, 5, 10, 15, 20 or 30 min
Operating conditions:	-10 ... +60 °C, 0 ... 85 % RH without condensation (Instrument)
Storage temperature:	-25 ... +65 °C (Instrument)
Protection degree:	IP64
Housing:	ABS plastic, 55 SHORE hard rubber (sides and protective casing)
Dimensions:	165 x 88 x 35 mm (without protective casing)
Weight:	approx. 400 g (including battery and protective casing)
Scope of supply:	Batteries, SD card, DeltaLog 9 software, CP31, HD31.28 and case. Connection module, measuring sensors and mains adapter are optional and not included in the scope of supply.

Accessories and spare parts:

CP23

USB connecting cable (mini-USB plug on the device and PC USB plug)

SWD05

Stabilised mains adapter, 100 ... 240 VAC, 5 VDC, output type A USB plug

HD31.28

Protective casing, durable SHORE 55 rubber, stand and magnet

SELECTION OF SENSORS:
THE FOLLOWING IS ONLY AN SAMPLING OF THE AVAILABLE MEASURING SENSORS.
FOR A COMPLETE OVERVIEW OF THE AVAILABLE MEASURING SENSORS FOR THE VARIOUS PARAMETERS,
VISIT WWW.GHM-GROUP.DE



TEMPERATURE SENSORS:

Temperature sensors with thermocouples and Pt100/1000 are available. They are available either as a complete sensor with SICRAM plug or as a SICRAM module for connection of external sensors (including thermocouples of the type K, J, T, E, N, R, S, B).

Example: TP 472 I (Pt100, immersion sensor)



Immersion probe, -196 ... +500 °C, ± 0.25 °C (-196 ... +300 °C), $\varnothing$ 3 mm, sensor length 300 mm, cable length 2 m

Example: TP 744 I (type K, air sensor)



Air sensor, up to 400 °C, $\varnothing$ 4 mm, sensor length 180 mm, cable length 2 m

SICRAM modules TP 471, TP 471 Do, TP 471 D and TP 471 D1 for connection of external sensors



COMBINED HUMIDITY AND TEMPERATURE SENSORS

There are currently nine different sensors available with SICRAM plugs. Temperature measuring range, up to 180 °C depending on the version, humidity measuring range 0...100 % RH

Example: TP 478 ACR (Pt100, capacitive)



Measuring range: -40 °C ... +150 °C, 0 ... 100 % RH, sensor length 130 mm, cable length 5 m

PRESSURE SENSORS
(ABSOLUTE, RELATIVE AND DIFFERENTIAL PRESSURE)

PP 471: SICRAM module for connection of pressure sensors from the TP 704 / TP 705 series (absolute, relative and differential pressure, measuring range from 10 mbar to 500 bar depending on the probe)

PP 472: SICRAM probe for measurement of barometric pressure (600 ... 1100 mbar, ± 0.3 mbar, operating range -10 ... +60 °C).

PP 473 S1...S8: SICRAM probes (differential pressure, measuring range from 10 mbar to 2000 bar depending on the probe)

AIR SPEED SENSORS:

After various measuring processes (heat wire or impeller anemometer and pilot probes).

Heat wire probes:

Direction-dependent (measuring range 0.1 ... 40 m/s) or omnidirectional for measurement of thermal comfort (0.1 ... 5 m/s)



3-CHANNEL MULTI-FUNCTION DATA LOGGER

Impeller probes:

Measuring range 0.6 ... 25 m/s (Ø 100 mm) or 0.4 ... 20 m/s (Ø 60 mm)



Pitot dynamic pressure probes:

Measuring ranges, 2 ... 40 m/s to 2 ... 130 m/s, depending on probe version (T1 to T4) and SICRAM differential pressure module (AP 473 S1...S4)



... Refer to HD 31 data sheet for details.

PHOTOMETRIC AND RADIOMETRIC PROBES:

BWide assortment of photometric and radiometric probes (ready for connection with SICRAM plugs) for measurement of:



- Lighting strength (Lux)
- Luminance (cd/m²)
- UVA, UVB, UVC irradiance (W/m²)
- UVEff irradiance, weighted (W/m²)
- Irradiance in the visible and NIR range, 400 ... 1050 nm (W/m²)
- "PAR" photosynthetically active radiation (W/m²)
- Irradiance of blue light, 380 ... 550 nm (W/m²)
- Global solar radiation (W/m²)

LP 471 PYRA02.5 for measurement of solar radiation (Class 2 pyranometer according to WMO. Further pyranometers according to Class 1, secondary standard or low-cost version with silicone sensor on request)

CO₂ PROBE

CO₂ probe (NDIR) with SICRAM plug, measuring range 0 ... 5000 ppm CO₂, operating temperature -5 ... +50 °C



Please visit our website www.ghm-group.de for complete information about our HD 31 multi-function data logger. You will also find a complete overview of all compatible probes for the specified parameters.

ANEMOMETER (AND THERMOMETER)

THERMAL ANEMOMETER PROBES / IMPELLER PROBES



HD-2303-0



AP-471-S1

AP-471-S2

AP-472-S2

HD-2303-0

Art. no. 700073

Anemometer

General:

The HD-2303-0 is designed for use in the fields of air conditioning, heating, ventilation and environmental comfort. It uses hotwire or vane probes to measure air speed, flow rate, and temperature inside pipelines and vents. Temperature only is measured by immersion, penetration air or contact probes. The temperature sensor used can be chosen from the Pt100, Pt1000. The probes are equipped with the SICRAM module, with the factory calibration data stored inside.

Specifications:

Instrument

Dimensions:	140 x 88 x 38 mm (H x W x D)
Material:	ABS
Display:	2 x 4½ digits plus symbols, Visible area: 52 x 42 mm

Operating conditions

Working temperature:	-5 ... +50 °C
Storage temperature:	-25 ... +65 °C
Working relative humidity:	0 ... 90 % RH without condensation
Protection degree:	IP67

Power supply

Batteries:	3 1.5 V type AA batteries
Autonomy:	200 h with 1800 mAh alkaline batteries
Power absorbed with instrument off:	<20 µA

Measuring unit: °C – °F – m/s – km/h – ft/min – mph – knot – l/s
m³/min – m³/h – ft³/s – ft³/min

Connections

Input module for the probes:	8-pole male DIN45326 connector
-------------------------------------	--------------------------------

Measurement of temperature by Instrument

Pt100 measurement range:	-200 ... +650 °C
Pt1000 measurement range:	-200 ... +650 °C
Resolution:	0.1 °C
Accuracy:	±0.1 °C

Scope of supply: Instrument HD-2303-0, 3 1.5 V alkaline batteries, manual, case.
Probes must be ordered separately.

AP-471-S1

Art. no. 700074

Thermal anemometer probes for measurement of air speed

AP-471-S2

Art. no. 700075

Thermal anemometer probes for measurement of air speed

Specifications:	AP-471-S1	AP-471-S2
Type of measure:	Air speed, calculated flow rate, air temperature	
Type of sensor		
Speed:	NTC thermistor	Omnidirectional NTC thermistor
Temperature:	NTC thermistor	NTC thermistor
Measurement range		
Speed:	0.1 ... 40 m/s	0.1 ... 5 m/s
Temperature:	-25 ... +80 °C	-25 ... +80 °C
Measurement resolution		
Speed:	0.01 m/s – 0.1 km/h – 1 ft/min – 0.1 mph – 0.1 knot	
Temperature:	0.1 °C	
Measurement accuracy		
Speed:	±0.2 m/s (0 ... 0.99 m/s) ±0.4 m/s (1.00 ... 9.99 m/s) ±0.8 m/s (10.00 ... 40.0 m/s)	±0.2 m/s (0 ... 0.99 m/s) ±0.3 m/s (1.00 ... 5.00 m/s)
Temperature:	±0.8 °C (-10 ... +80 °C)	±0.8 °C (-10 ... +80 °C)
Maximum speed:	0.1 m/s	
Air temperature compensation:	0 ... 80 °C	
Sensor working conditions:	Clean air, RH <80 %	
Battery life:	Approx. 20 hours @ 20 m/s with alkaline batteries	Approx. 30 hours @ 5 m/s with alkaline batteries
Unit of Measurement		
Speed:	m/s – km/h – ft/min – mph – knot	
Flow rate:	l/s – m³/s – m³/min – m³/h – ft³/s – ft³/min	
Pipeline section for flow rate calculation:	0.0001 ... 1.9999 m²	
Cable length:	~ 2 m	
Scope of supply:	Hot-wire telescopic probe	Omnidirectional hot-wire probe

AP-472-S2

Art. no. 700076

Vane probe

Specifications:	
Type of measure:	Air speed, calculated flow rate
Diameter:	60 mm
Type of measurement	
Speed:	Vane
Measurement range	
Speed (m/s):	0.5 ... 20
Temperature (°C):	-25 ... +80 (*)
Resolution	
Speed:	0.01 m/s – 0.1 km/h – 1 ft/min – 0.1 mph – 0.1 knot
Accuracy	
Speed:	±(0.4 m/s + 1.5 % f.s.)
Minimum speed:	0.5 m/s
Unit of Measurement	
Speed:	m/s – km/h – ft/min – mph – knot
Flow:	l/s – m³/s – m³/min – m³/h – ft³/s – ft³/min
Pipeline section for flow rate calculation:	0.0001 ... 1.9999 m²
Cable length:	~ 2 m
Scope of supply:	Vane probe

(*) The indicated value refers to the vane's working range.

PHONOMETER



GSH 8922

Art. no. 602739

Phonometer

General:

Compensation of the background-noise for measuring sound-sources in the fore-ground. Weighting of the sound level via two weighting-filters according to the IEC standard. Assignment of the max/min value during one measuring period.

Specifications:

Measuring range:	30 ... 130 dB (6 ranges) 30 ... 80, 40 ... 90, 50 ... 100, 60 ... 110, 70 ... 120, 80 ... 130 dB manual or automatic selection of range
Resolution:	0.1 dB
Accuracy:	±1.5 dB
Norms:	ANSI S1.4 and IEC 651 Type 2
Frequency rate weighted:	31.5 Hz ... 8 kHz
Evaluation weight filter:	2, selectable
Type A:	evaluation of the spectrum in accordance with the perceptive faculties of the human ear. (Sound insulation establishment, environmental analysis)
Type C:	linear evaluation of spectrum (sonic-analysis of engines or machines)
Weight of time factor:	fast or slow
Microphone:	6 mm Electret condenser microphone
Display:	3½-digit LCD-backlight display, additionally quasi-analog bar graph
Analog output:	AC: 0.707 Vrms, DC: 10 mV DC / dB
Working temperature:	4 ... +50 °C
Relative humidity:	10 ... 90 % RH
Storage temperature:	-20 ... +60 °C
Interface:	RS232, (2400BD8N1)
Power supply:	9 V battery, external 9 V power supply
Operating time:	20 hours (with alkaline)
Housing:	256 x 80 x 38 mm (H x W x D)
Weight:	approx. 240 g (device)
Scope of supply:	Device with analog output, battery, case, manual

ROTATION SPEED MEASURING DEVICE



ROTATION SPEED MEASURING DEVICE

rotaro 3

Art. no. 603861

Rotation speed measuring device via light and reflecting label or measuring tip

Application:

The handheld tachometer rotaro 3 is useful at the installation and setup of plants and machinery as well as for service application, monitoring production processes or use at development laboratory. The rotaro 3 can measure rotary speed of for example motors, turbines, pumps as well as stirring devices, centrifuges and haulage installations, foil or textile manufacturing units, coil and transformer winding machines, machine tools, etc. Furthermore it can measure running speed and length of foils and band of all kind.

Specifications:

Measuring range:	
rpm:	1.00 ... 99.999 min ⁻¹ (optical measurement) 1 ... 19.999 min ⁻¹ (mechanical measurement)
Velocity:	Ø 0.1 m: 0.10 ... 1999 m / min Ø 6": 0.10 ... 1524 m / min (other units possible: m / s, ft / min, in / min ...)
Length:	0 ... 99999 m / ft / in
Accuracy:	
rpm:	±0.02 % of m.v. (±1 digit)
Measuring distance:	max. 600 mm
Measuring principle:	optical / mechanical
Memory function:	min- / max- value memory, average and last value
Power-off:	automatically after 30 s
Display:	5-digit LCD display with 10 mm height of digits and floating point at range change
Power supply:	2 x AA battery or accumulator
Working temperature:	0 ... 50 °C
Storage temperature:	-20 ... +70 °C
Housing:	plastic ABS
Approval:	CE
Dimensions:	175 x 60 x 28 mm (H x W x D)
Weight:	250 g
Scope of supply:	Rotation speed measuring device incl. reflecting labels, measuring tip, hollow tip, measuring wheels (Ø 0.1 m and Ø 6"), extension shaft, calibration certificate, case, battery, manual

ROTATION SPEED MEASURING DEVICE



VIA LIGHT AND REFLECTING LABEL

ecotach

Art. no. 603673

Rotation speed measuring device via light and reflecting label

Application:

The handheld tachometer ecotach is useful at the installation and setup of plants and machinery as well as for service application, monitoring production processes or use at development laboratory. It can measure rotary speed of for example motors, turbines, pumps as well as stirring devices, centrifuges and haulage installations.

Specifications:

Measuring range:	1 ... 60.000 rpm
Accuracy:	±0.02 % of m.w. (±1 digit)
Measuring distance:	max. 450 mm
Measuring principle:	optical
Power-off:	automatically after 30 s
Display:	5-digit LCD display for measuring value with floating point, measuring unit, trigger signal, low-battery warning, notification when battery is low
Power supply:	2 x AA battery or accumulator
Working temperature:	0 ... 50 °C
Housing:	plastic ABS
Approval:	CE
Dimensions:	145 x 60 x 28 mm (H x W x D)
Weight:	147 g
Scope of supply:	Rotation speed measuring device incl. reflecting labels, transportation slip case, battery, manual

SIMULATORS



GHM Sensor Simulator
SIM-1

HD-9609

APPLICATION:

DMS simulation

•

Voltage simulation

•

Current simulation

•

TC simulation

•

Pt100 simulation

•

Current measurement

•

Voltage measurement

•

pH simulation

•

Redox simulation

•

EQUIPMENT:

Connections

7-pin Binder

BNC

Battery

Li-Ion

9 V DC alkaline battery

Display

Graphic LCD

LCD, 2 lines, 3 ½ digits

DEVICE INFORMATION:

Catalogue page

Page 106

Page 106

INFORMATION

The GHM sensor simulator is used for fast verification of metrological devices such as DMS and temperature measuring amplifiers. Even sensors with a voltage or current interface can be simulated. Instead of Sensor, a GHM sensor simulator is connected and thus the complete measurement chain from the sensor cable over the amplifier to digital detection tested. The simple and intuitive operation and the graphical display allow easy useage without training periods. Due to battery operation and compact dimensions the GHM sensor simulator is suitable particularly for the mobile use on the test bench. The additional complete measurement of the voltage and current signals the GHM sensor simulator into a unique instrument for using the test bench as well as in the laboratory.

SIMULATOR

**GHM SensorSimulator SIM-1**

Art. no. 201164
Simulator

GHM SensorSimulator SIM-1F

Art. no. 201366
Simulator with frequency output

General:

The GHM SensorSimulator issues various current and voltage signals. With additional return measurement of feed voltages and currents from connected measuring amplifiers, the GHM SensorSimulator can also provide optimal, true-to-the-original simulation of sensors like Pt100, various thermocouples and strain gauge sensors. An optional frequency output is available.

Application:

It can be used to compare and check displays and measuring transducers or transformers or complete measuring distances. Voltages and currents can also be measured with the device.

Specifications:

Accuracy:	see under Sensors
Connections:	7-pin Binder socket for signal input and output, Mini USB for voltage supply / charge function
Display:	Graphic LCD, monochrome, adjustable background light (180 x 128 pixels)
Operation:	Keypad
Supported languages:	German / English
Dimensions:	86 x 160 x 37 mm (W x H x D)
Weight:	250 g (including battery)
Supply voltage:	5 V DC (micro-USB)
Akku:	Li-Ion battery
Ambient temperature:	0 ... 50 °C

Simulation function

Voltage source:	Simulation range: ± 10 V Accuracy: ± 1 %
Signal current:	Simulation range: ± 25 mA Accuracy: ± 1 %
Strain gauge bridges:	Simulation ranges: 0, 0.5, 1, 2, 4, 5, 10, 25, 50 mV/V Accuracy: ± 1 % Feed: 2.5 V, 5 V, 10 V

Thermocouples**Type K**

Simulation ranges:	-100 ... +1000 °C (Increments: -100 ... +100 °C: 10 °C 100 ... 500 °C: 25 °C 500 ... 1000 °C: 50 °C)
---------------------------	---

HIGHLIGHTS:

- Simulation of various sensors, such as strain gauge, Pt100, TC
- Transmitter and measuring function for voltages and currents
- Simple, self-explanatory use in German and English
- Robust protective silicone case
- Graphic LCD
- Compact dimensions
- Battery-operated

**Accuracy:**

with simulated compensation:
 ± 1 %; with internal temperature
measurement: ± 3 K

Type J

Simulation ranges:	-100 ... +1000 °C (Increments: -100 ... 100 °C: 10 °C 100 ... 500 °C: 25 °C 500 ... 1000 °C: 50 °C)
---------------------------	--

Accuracy:

with simulated compensation:
 ± 1 %; with internal temperature
measurement: ± 3 K

Type N

Simulation ranges:	-100 ... +1250 °C (Increments: -100 ... +100 °C: 10 °C 100 ... 500 °C: 25 °C 500 ... 1250 °C: 50 °C)
---------------------------	---

Accuracy:

with simulated compensation:
 ± 1 %; with internal temperature
measurement: ± 3 K

Type S

Simulation ranges:	-50 ... +1600 °C (Increments: -50 ... +100 °C: 10 °C 100 ... 500 °C: 25 °C 500 ... 1600 °C: 50 °C)
---------------------------	---

Accuracy:

with simulated compensation:
 ± 1 %; with internal temperature
measurement: ± 3 K

Pt100

Simulation ranges:	-100 ... +850 °C (Increments: -100 ... +100 °C: 10 °C 100 ... 500 °C: 25 °C 500 ... 850 °C: 50 °C)
---------------------------	---

Accuracy:

± 1 %

Frequenz (Option F)

Simulation ranges:	1 Hz ... 500 kHz (Increments: 1 ... 10 Hz: 1 Hz 10 ... 100 Hz: 10 Hz 100 Hz ... 1 kHz: 100 Hz 1 ... 10 kHz: 1 kHz 10 ... 100 kHz: 10 kHz 100 ... 500 kHz: 100 kHz)
---------------------------	--

Level (adjustable):

± 10 V

Accuracy:

± 1 %

Measurement function:

Voltage source:	Measuring range: ± 30 V Accuracy: ± 0.5 %
Current:	Measuring range: ± 30 mA Accuracy: ± 0.5 %
Scope of supply:	GHM SensorSimulator, battery, charger, manual

PH AND MV SIMULATOR

**HIGHLIGHTS:**

- Checking and calibrating pH and redox ORP instrument
- Simple to use

HD-9609

Art. no. 700046
pH and mV simulator

General:

The simulator HD-9609 is a portable instrument for checking and calibrating pH and mV measuring instruments. The characteristics of this instrument satisfy any checking and calibrating requirements for both portable and panel-mounted instruments; it can be used in laboratories, in industry or for check out on field. Despite its many functions, the instrument is simple to be used: a large display, with dual indication, and a series of symbols allow it to be used even by unskilled personnel.

Specifications:

pH simulation:	0 ... 14 pH
pH resolution:	0.1 pH
pH accuracy (20 ... 25 °C):	0.002 pH
mV simulation:	± 1.999 mV
mV resolution:	1 mV
mV accuracy:	± 100 μ V
Noise (0 ... 10 Hz):	1 μ V peak/peak
Simulation of temperature compensation:	-20 ... +150 °C (-4 ... +302 °F)
Output impedance:	100 k Ω 1 %, 1 G Ω 5 %
Display:	LCD 2 lines, 3 1/2 digits. Figure height approx. 12.5 mm.
Symbols:	pH, mV, °C, °F, HI imp., LO imp., 0.1 pH, 1 pH, 1 mV, 10 mV
Working temperature:	-5 ... +50 °C (-23 ... +122 °F)
Power supply:	9 V DC alkaline battery. Low battery indication.
Consumption (instrument only):	5 mA lit up, 20 μ A turned off
Autonomy:	about 200 h
Dimensions:	187 x 72 x 38 mm (H x W x D)
Scope of supply:	instrument HD-9609, adapter cables CP-9509BNC, CP-9509-T, carrying case

Accessories:**CP-9509-BNC**

Art. no. 700047
Adapter cable, L = 1 m, male BNC connector on both ends

CP-9509-T

Art. no. 700048
Adapter cable, L = 1 m, male BNC connector on one side

SOFTWARE




Application:	EBS 20M EBS 60M	EASYControl net	GSOFT 3050	GSOFT 40K	MINISOFT (without picture)	EASYBus Configurator (without picture)	GDUSB FastView
GMH 3xxx and GMH 5xxx	•	•	•				
EASYBus and EASYLog	•	•		•		•	
T-Logg				•	•		
GDUSB 1000							•
Executable from / support from Windows	7/7	7/7	XP/7	XP/7	XP/7	7/7	7/7
Several interfaces usable at the same time	• *	• *					• ***
Live measuring value recoding and displaying	•	•					•
Number of data points (recommendation)	up to 1 Mio.	up to 1 Mio.					up to 10 Mio.
Stop logger and delete memory			•	•	•	•	
Read-out logger			•	•	•		
Change alarm boundaries		•		•	•	•	
Change correction (offset, slope)			•		•	•	
Change label		•		•	•	•	
Network compatible (Simultaneous access to data by several PCs)		•					
Access via SQL queries possible		•					
Pilot EBB Out		• **					
Subject to a charge	•	•	•	•			
Application	Lab, test rig	Long-term monitoring		Read-out data logger		Start-up	Lab, test rig

* Arbitrarily combined interfaces, GMH 3xxx/5xxx and EASYBus can be used simultaneously.

** Interface-spanning, alarm of GMH 3xxx/5xxx can be assigned to EBB-Out of EASYBus.

*** Recommended up to 5 GDUSB 1000 at full measuring speed, depending on CPU performance.

SOFTWARE FOR MEASUREMENT DATA ACQUISITION

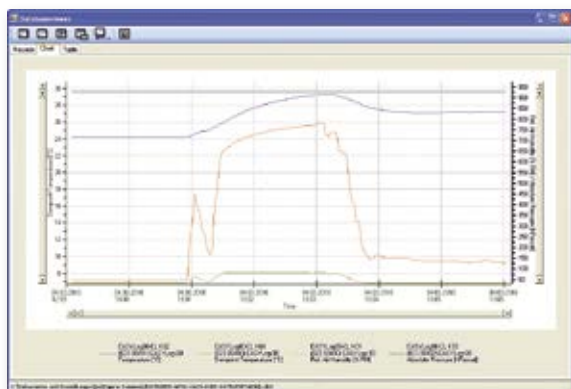**EBS 20M**

Art. no. 601158

20 channel measurement data detection

EBS 60M

Art. no. 601160

60 channel measurement data detection

General:

This software makes up a low-price and comfortable multi-channel acquisition program for measuring data. The program is suitable for recording, monitoring, visualization and documentation. Simultaneous use of different systems: EASYBus and GMH handheld devices

Application:

- On-site recording
- Process and system control, monitoring of climate and buildings
- Real time monitoring of measuring data i.e for data evaluation and logging for cost listings, overview of consumption, optimisation of processes, and other statistics

Functions:

- Simultaneous use of several serial interfaces
- Simultaneous use of different serial converters
- Quick and easy installation and handling
- Freely scaleable diagrams
- Visualization of actual measurements values
- Data export in standard formats


Measuring Cycle:

smallest possible measuring cycle: 500 ms

System requirements:

1 GHz CPU, 1 GB RAM, 100 MB HDD, 1 available USB Port
Microsoft Windows 7 SP1 (32 or 64 Bit)
(not executable with Windows RT, ARM or Intel Itanium based Windows systems)

EASYBUS-SOFTWARE

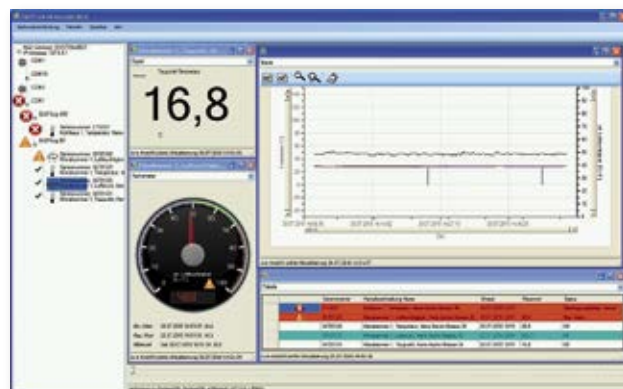**EASYControl net**

Art. no. 601152

Network-compatible measurement data detection

General:

This software allows cost-efficient network-compatible data logging and monitoring systems. The visualization can be done by any computer in the network. EASYBus as well as GMH hand-held instruments are supported at the same time.

Secured:

- User accounts
- Stored data can't be modified or manipulated later

Live:

- Constantly updating data
- Time assignment of the data
- Load ancient data and complete them with „live“ data

Peripheral:

- Uncoupling of data acquisition, data storage and visualisation
- Component communication via LAN
- Data visualisation by local network

Controlled:

- Trigger EBB Out switching channels via EASYBus


Clear:

- Different kinds of visualisation (table, digital, tachometer, chart)
- Display multiple graphs „live“ in one chart
- Tooltips (with status information) for each measuring point in the chart
- Blinking symbols on error or status message in the visualisation
- Displaying error- and status messages.
- Displaying min- max- and mean value of the sensors
- Generate reports and store them as PDF, Excel or Word file

System requirements:

1 GHz CPU, 1 GB RAM, 100 MB HDD, 1 available USB Port
Microsoft Windows 7 SP1 (32 or 64 Bit)
(not executable with Windows RT, ARM or Intel Itanium based Windows systems)

LOGGER-SOFTWARE

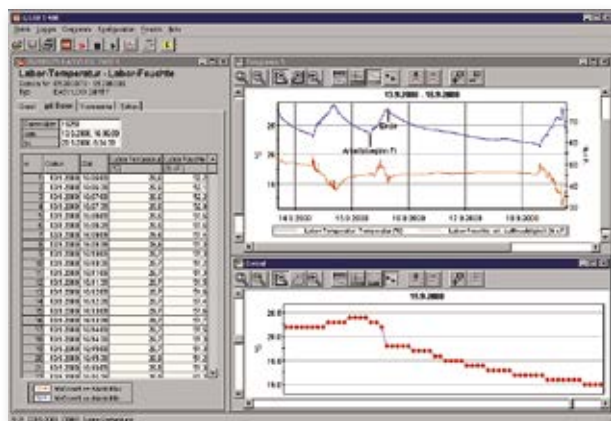

GSOFT 40K

Art. no. 601145

Windows-software for EASYLog and T-Logg with logger


Functions:

- Display of the device status information
- Setting the alarm function
- Operation of the logger function
 - Start
 - Stop
 - Cycle time
 - Read data
 - Delete data
- Chart display
 - Various measuring sequences in one diagram
 - Real-time axis
 - Zoom function
 - Measurement points, legend and measurement cursor displayed or hidden
 - Add comments
 - Storing the window position
- Export function
 - Data export of series of measurements as a CSV file
- Print function
 - Print out the data as a table and/or trace
- Multilingual
 - German, English, Czech and French
- Automated retrieval and archiving
 - Readout of all connected data loggers to be fixed times
 - Automatic storage of measured values on the hard disk
 - Automatic export of measurement values as a CSV file
 - Automatic printout

System requirements:

1 GHz CPU, 1 GB RAM, 100 MB HDD
 Windows 7 SP 1 (32 or 64 Bit)
 interface converter
 for EASYLog: EBW 1, EBW 3, EBW 64
 for T-Logg: USB 5100
 (executable from Windows XP, not executable with Windows RT, ARM or Intel Itanium based Windows systems)

LOGGER-SOFTWARE

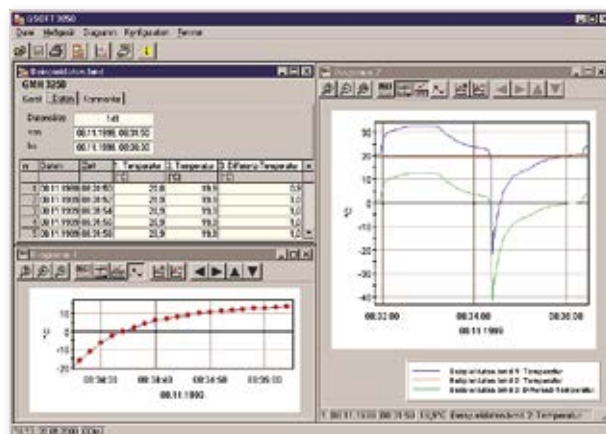

GSOFT 3050

Art. no. 601336

Windows-software for GMH3xxx- and GMH5xxx-series with logger

Functions:

- Display of the GMH-information
- Setting of the alarm function
- Operation of the logger function
 - start
 - stop
 - Cycle time
 - Read data
 - Delete data
- Diagram display
 - The Logger data can be displayed in the form of a diagram
 - Real-time axis
 - Zoom function
 - Display of legend and marking of measuring points can be switched on / off
 - Add comments
 - Storing the window position
- Export function
 - Data export of series of measurements as a CSV file
- Logger data print-out
 - Data can be printed as tables or as diagram
- Multilingual
 - German, English, Czech and French

System requirements:

1 GHz CPU, 1 GB RAM, 100 MB HDD
 Windows 7 SP 1 (32 or 64 Bit)
 interface converter
 for GMH 3000: GRS 3100, GRS 3105 or USB 3100 N
 for GMH 5000: USB 5100
 (executable from Windows XP, not executable with Windows RT, ARM or Intel Itanium based Windows systems)



SOFTWARE CONNECTION

	GMH 3000-DLL (windows library)	EASYBus-DLL (windows library)	GDUSB 1000-DLL (windows library) (w/o picture)	inray - inMOVE GPL-Router-Plug-in (www.inray.de) (w/o picture)	Protocol description (www.greisinger.de) (w/o picture)
GMH 3xxx, GMH 5xxx	•				•
EASYBus and EASYLog		•		•	•
TLogg		•			•
GDUSB 1000			•		
Start, stop, delete, read-out logger	•	•			
Program examples	Visual Studio, Excel VBA		Visual Studio		
subject to costs	•	•	•	•	

GMH 3000.DLL

Art. no. 603027

Windows-functional library for interface communication to integrate all GMH 3xxx/5xxx device functions

EASYBUS.dll

Art. no. 609174

Windows-function library for interface communication EASYBus - PC

HANDHELD INSTRUMENTS - GENERAL ACCESSORIES

SILICONE PROTECTION COVER



K 50 BL

Art. no. 601352

Silicone protection cover blue, suitable for: GMH 5xxx, GMH 2710

K 50 RE

Art. no. 607456

Silicone protection cover red, suitable for: GMH 5xxx, GMH 2710

MOUNT



GMH 1300

Art. no. 601091

Magnetic mount for hanging up devices with integrated suspension clip

HD-22-3

Art. no. 700040

Freely positionable, flexible laboratory electrode holding arm. For probes with Ø 12 mm. (see figure)

HANDHELD INSTRUMENTS - GENERAL ACCESSORIES


DEVICE CASE



Einlage GKK 5001

GKK 1000

Art. no. 611603

with cut-outs for 1 device of the GMH 1xxx series
(235 x 185 x 48 mm)

Einlage GKK 1000

GKK 1001

Art. no. 611604

with cut-outs for 1 device of the GMH 1xxx series and
accessories for water analysis (395 x 295 x 106 mm)**NEW!****GKK 3001**

Art. no. 611605

with cut-outs for 1 device of the GMH 3xxx series and
accessories for water analysis (395 x 295 x 106 mm)**GKK 5001**

Art. no. 611606

with cut-outs for 1 device of the GMH 5xxx-/7500 series and
accessories for water analysis (395 x 295 x 106 mm)

UNIVERSAL CASE



GKK 252



GKK 3100



GKK 1100



GKK 3600



GKK 3700

GKK 252

Art. no. 601056

with foam lining for universal use
(235 x 185 x 48 mm)**GKK 3100**

Art. no. 601058

with foam lining for universal use
(275 x 229 x 83 mm)**GKK 1100**

Art. no. 601060

with foam lining for universal use
(340 x 275 x 83 mm)**GKK 3600**

Art. no. 601062

with foam lining for universal use
(394 x 294 x 106 mm)**GKK 3700**

Art. no. 601064

with foam lining for universal use
(450 x 360 x 123 mm)


UNIVERSAL CASE



GKK 4400



Color may vary.

GKK 5240
with foam lining
for individual adaption**GKK 4400**

Art. no. 602067

robust case for up to 10 devices or accessories, foam for water analysis (closed cell structure),
with bottle and electrode retainer. Dimensions: 500 x 405 x 140 mm**GKK 5240**

Art. no. 602068

robust case, suitable for universal applications due to possibility of individual adaption of its
foam lining, pressure balance possible, water-protected. Dimensions: 520 x 415 x 200 mm

HANDHELD INSTRUMENTS - GENERAL ACCESSORIES

PROTECTION BAG



ST-R2



ST-KO



ST-KF



ST-G1000

**ST-R1**

Art. no. 601066

Nappa leathern device protection bag with 1 round cut-out for sensor connection suitable for:

GMH 3111, GMH 3151, GMH 3161-12, GMH 3181-12, GMH 3431, GMH 3451, GMH 3611, GMH 3651, GMH 3692, GMH 3710, GMH 3750

ST-R1-US

Art. no. 605929

Nappa leathern device protection bag with 1 round cut-out for sensor connection with strap

**ST-R2**

Art. no. 601068

Nappa leathern device protection bag with 2 round cut-outs for sensor connection suitable for:

GMH 3156, GMH 3161-002, GMH 3161-01, GMH 3161-07, GMH 3161-13, GMH 3181-002, GMH 3181-01, GMH 3181-07, GMH 3181-13

**ST-R3**

Art. no. 605931

Nappa leathern device protection bag with 2 round cut-outs for sensor connection suitable for:

GMH 3511/31/51

**ST-N1**

Art. no. 601070

Nappa leathern device protection bag with 1 rectangular cut-out for sensor connection suitable for:

GMH 1150, GMH 1170

**ST-N2**

Art. no. 601072

Nappa leathern device protection bag with 2 rectangular cut-outs for sensor connection suitable for:

GMH 3221

**ST-RN**

Art. no. 601074

Nappa leathern device protection bag with 2 round cut-outs for sensor connection (1 x round, 1 x rectangular) suitable for:

GMH 3211, GMH 3330, GMH 3350, GMH 3831, GMH 3851

ST-KO

Art. no. 601078

device protection bag, without cutouts suitable for:

GTD 1100, GPB 3300

**ST-KN**

Art. no. 601080

device protection bag with rectangular cut-out for sensor connection suitable for:

GTH 1150, GTH 1170

**ST-KR**

Art. no. 601082

device protection bag with round cut-out (central) suitable for:

GTH 175, GOX 20, GOX 100, GLF 100, GLF 100 RW

**ST-KF**

Art. no. 601084

device protection bag with punched-out slot for a sensor head suitable for:

GFTH 95, GFTH 200, GFTB 200, GTH 200 air

**ST-KD**

Art. no. 601086

device protection bag with 2 round cut-outs suitable for:

GDH 200-07, GDH 200-13, GDH 200-14, GMR 110

**ST-G1000**

Art. no. 611373

Device protection bag with 1 round cut-out for sensor connection suitable for:

G 1000 series

REMOTE OPERATION



WLAN 3200



LAN 3200

LAN 3200

Art. no. 609253

Gigabit Ethernet to USB converter

General:

For inquiring EASYBus modules, GMH handheld devices with interface or GDUSB 1000 via network. 2 USB ports for direct connection of EBW 3, USB 3100 N or GDUSB 1000 (up to 15 with USB hub). Connection of EBW 1, EBW 64 or EBW 240 via USB adapter (included to scope of supply)

Scope of supply: LAN 3200, power supply unit, USB adapter, manual, driver CD

WLAN 3200

Art. no. 610289

Gigabit-Ethernet or Wireless-LAN to USB converter

General:

For accessing EASYBus modules, GMH handheld devices with interface or GDUSB 1000 via local network or via WiFi. With 1 USB port for direct connection of one or more EBW 3, USB 3100N or GDUSB 1000 (up to 15 with an USB hub). With an USB to serial converter for connection of an EBW 1, EBW 64 or EBW 240.

Weight: 118 g

Dimensions: 100 x 100 x 25,5 mm (W x D x H)

Scope of supply: WLAN 3200, power supply unit, USB adapter, manual, CD

PORTABLE THERMAL PRINTER

**HD-40-1**

Art. no. 700056

Portable thermal printer that is connected to instruments or PC through the RS232 serial input.

Specifications:

Printing method:	Thermal
Resolution:	203 DPI (8 dot/mm)
Printing speed:	Up to 90 mm/s (depending on battery charge and ambient conditions)
Dimensions:	53 x 165 x 105 mm (H x W x D)
Material:	ABS
Scope of supply:	Device, 4 x NiMH 1.2 V rechargeable batteries, SWD-10 power supply, manual, 5 thermal paper rolls

Accessories:**HD-2110-CSNM**

RS232C 8-pole MiniDin - 9-pole D Sub female null-modem cable for connecting the printer to instruments with MiniDIN connector

HD-2110-RS

M12 - 9-pole D Sub connectors cable for connecting the printer to instruments with M12 connector

SWD-10

100 - 240 V AC/12 V DC-1 A mains battery charger.

BAT-40-1

Spare battery pack for HD-40-1 printer with in-built temperature sensor.

RCT

The kit includes 4 thermal paper rolls 57 mm wide and 32 mm diameter.

INTERFACE



USB 3100 N



USB 5200



GRS 3100



GRS 3105



USB Adapter

USB 3100 N

Art. no. 601092

Interface converter GMH 3xxx $\Leftrightarrow$ PC, for electrically isolated connection of a GMH 3xxx to the USB-interface of your PC. (Converter supplying from PC interface)

USB 5100

Art. no. 601095

Interface converter GMH 5xxx $\Leftrightarrow$ PC, for electrically isolated connection of a GMH 5xxx to the USB-interface of your PCs. (Converter supplying from PC interface)

USB 5200

Art. no. 607177

USB level converter for GMH 5000 Handheld Instruments (such as USB 5100). With additional analog output, can be set on the device.

GRS 3100

Art. no. 601097

Interface converter GMH 3xxx $\Leftrightarrow$ PC for electrically isolated connection of a GMH 3xxx to the RS232-interface.

GRS 3105

Art. no. 601099

5-point interface converter GMH 3xxx $\Leftrightarrow$ PC, connection of 5 GMH 3xxx to the RS232-interface of your PC. (Converter supply achieved via permanently connected power supply) Device delivered with 9-pin Dsub extension cable and 5 connection cables VEKA3105.

VEKA 3105

Art. no. 601103

Spare connection cable, 2 m, GMH 3xxx $\Leftrightarrow$ GRS 3105

GSA 25S-9B

Art. no. 601105

Connection adapter (25-pin Dsub-adapter $\Leftrightarrow$ 9-pin Dsub-socket)

GSA 9S-25B

Art. no. 601107

Connection adapter (9-pin Dsub-adapter $\Leftrightarrow$ 25-pin Dsub-socket)

USB-Adapter

Art. no. 601109

for connection of a RS232-interface converter to the USB-interface

SWITCHING MODULES



GAM 3000

GAM 3000

Art. no. 601132

Switching module for the GMH 3xxx-series with alarm

General:

The GAM 3000 is an alarm or control output for the devices of the GMH 3xxx-series with alarm output function. The GAM 3000 is controlled via the serial interface of the GMH 3xxx. The setting of the alarm/switching limits are carried out the GMH 3xxx as usual.

You can choose between 2 different switching modes:

- **Alarm output:** Relay switches when the measuring value is no longer within the min / max alarm limit values or an error state occurs at the set channel.
- **Control output:** In this case the min / max values are not used as alarm points but as on/off switching points. In case of an error state the relay switches in its preferred state "off".

The desired switching function can be selected via an externally accessible miniature switch.

Specifications:

Power supply:	220 / 240 V, 50 / 60 Hz
Switching output:	controlled power socket, selector switch to choose switching state normally-open or normally-closed
Switching power:	10 A (ohmic load)
GMH-connection:	Interface connection and voltage supply are each connected with cable that is 1 m long which is permanently connected to the GAM 3000.
Dimensions:	(controller) 112 x 71 x 48 mm (L x B x T)

POWER SUPPLY

GB-AA

Art. no. 610049

Spare battery Mignon (AA) 1.5 V

GB 9 V

Art. no. 601115

Spare battery 9 V, type IEC 6F22

GAK 9 V

Art. no. 601118

NiMH accu 9 V

AAA-AKKU

Art. no. 601121

AAA accu, 1.2 V, 2 pieces, NiMH accu

NG 10

Art. no. 600272

Plug-in power supply (220 / 240 V, 50 / 60 Hz), output voltage: 10.5 V / 10 mA, suitable for devices with 2.5 mm jack connector (e.g. for devices of the series GDH ...)

NG 5 / 5000

Art. no. 602287

Plug-in power supply (220 / 240 V, 50 / 60 Hz), output voltage: 5 V DC, suitable for devices with BNC (e.g. for devices of the series GMH5xxx)

NG 10 / 3000

Art. no. 600273

Plug-in power supply (220 / 240 V, 50 / 60 Hz), output voltage: 10.5 V / 10 mA, suitable for devices with power supply socket (e.g. for devices of the series GMH3xxx)

PLUG AND CABLE

MINIDIN 4S

Art. no. 601111

Mini-DIN plug, 4-pin, with lock and for self installation

AAG2M

Art. no. 601112

2 m analog output cable for GMH3xxx-series, 2 x banana plug and 3.5 mm jack connector

AAG 5000

Art. no. 603871

Cable for analog output, with cable length 1 m, connectors: 1 x bayonet socket LTW 4-pole, 1 x loose ends, with ferrules
Application: GMH 5xxx.

DISPLAY / CONTROLLER



APPLICATION:	GIA ... N	GIA ... N - Ex	GIA 2448	GTH2448/1	GTH2448/2 ..3 ..4 ..5	GIA 2000	TA 9648	pH 9648	ET 2011	EDT 24...	GIA 0420 VO(-T) GIA 0420 WK(-T)	GIA 0420 VO-T-EX GIA 0420 WK-T-EX
Dimensions	24x48	24x48	24x48	24x48	24x48	48x96	48x96	48x96	35x77	35x77	Special size	
Measuring input normalized signal	•	•	•			•	•				•	•
Measuring input temperature (Pt100 / Pt1000)					•	•			•			
Measuring input temperature (thermo elements)				•		•			•			
Measuring input NTC										•		
Measuring input frequency / impulse, Universal input						•						
Measuring input pH / LF								•				
Ex-Protection		•										•


DEVICE INFORMATION:

Catalogue page	Page 115	Page 115	Page 116	Page 116	Page 116	Page 121	Page 126	Page 127	Page 130	Page 130	Page 132	Page 132					
																	
APPLICATION:	GIA 20 EB	GIR 230 ...	GIR 230 DIF..	GIR 300	GIR 360	GIR2002 / ... PID	GIR 2002NS / DIF ...	GIR 2000 Pt ...	UZ 9648	LF 9648	V 9648	A 9648	MAXVU 16 / 8	SD 9648	KM	GRA ... VO	GRA ... WK
Dimensions	24 x 48	24 x 48	24 x 48	36 x 72	36 x 72	48 x 96	48 x 96	48 x 96	48 x 96	48 x 96	48 x 96	48 x 96	46 x 46 46 x 92	48 x 96	48 x 48	Special size	
Measuring input normalized signal		•	•	•		•	•						•	•	•	•	•
Measuring input temperature (Pt100 / Pt1000)		•	•	•		•		•					•		•		
Measuring input temperature (thermo elements)		•		•		•							•		•		
Temperature (NTC, PTC)		•	•														
Measuring input frequency / impulse		•		•	•	•			•					•			
Universal input	•			•		•							•				
Measuring input Voltage / current											•	•					
Measuring input PH / LF										•							

DEVICE INFORMATION:

Catalogue page	Page 117	Page 118	Page 118	Page 119	Page 120	Page 122	Page 124	Page 124	Page 126	Page 127	Page 125	Page 125	Page 129	Page 128	Page 131	Page 133	Page 133
----------------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------

μP-DISPLAY WITH FREELY ADJUSTABLE SCALE



HIGHLIGHTS:

- time-saving on-site scaling without any additional auxiliary modules
- large display range from -1999 to +9999 digits
- smallest housing dimensions possible
- monitoring of probe damage, probe short-circuit, values no longer within measuring range.
- measurands: Moisture, pH, Redox, Oxygen, Conductivity, Gas, Temperature, Pressure, Distance, Revolutions Speed, Flow rate, Flow, Fill level, Power

GIA 0420 N

Art. no. 601026

μP-display with freely adjustable scale, without auxiliary energy, design type 4 ... 20 mA

GIA 010 N

Art. no. 601031

μP-display with freely adjustable scale, design type 0 ... 10 V

Specifications:	GIA 0420 N ..	GIA 010 N ..
Input signal:	4 ... 20 mA, 2-wire	0 ... 10 V, 3-wire
Voltage load:	approx. 3,5 V	-
Input resistance:	-	approx. 100 kOhm
Max. input:	25 mA	15 V
Power supply:	-	12 ... 28 V DC
Power consumption:	from current loop	<10 mA
Display:	LCD display, approx. 10 mm high	
Display range:	-1999 ... +9999	
Decimal point:	any position selectable	
Scaling:	scale freely adjustable via 3 keys at the back side of the unit	
Accuracy:	<0.2 % FS ±1 digit (at 25 °C)	
Temperature drift:	<100 ppm / K	
Measuring rate:	approx. 5 measurements / s	
Filter:	adjustable: 0.1 ... 2.0; off	
Storage:	min- / max-value memory selectable via button	
Switching output:	electrically isolated open collector	
Switching capacity:	28 V DC / 50 mA	
Working temperature:	-20 ... +50 °C	
Storage temperature:	-20 ... +70 °C	
Electric connection:	GIA 0420 N ..: 2 x 2-pin screw-type/plug-in terminal max. terminal range up to 1.5 mm ² GIA 010 N ..: 1 x 2-pin., 1 x 3-pin. screw-type/plug-in terminal, max. terminal range up to 1.5 mm ²	
Protection rating:	IP 20, with front flush installation IP 54	
Housing:	fibre-reinforced Noryl, front panel: polycarbonate	
Dimensions:	48 x 24 mm (B x H, front dimensions)	
Mounting depth:	approx. 65 mm incl. terminal	
Panel cutout:	45 ^{+0.5} x 21,7 ^{+0.5} mm (W x H)	
Scope of supply:	Device, manual	

GIA 0420 N-EX

Art. no. 601033

Display, design type 4 ... 20 mA,
with EX-protection for all potentially explosive atmospheres
Ex qualification: II 2G Ex ia/ib IIC/T4
(Further Information please refer to our homepage www.greisinger.de)



GIA 010 N-EX

Art. no. 601034

Display, design type 0 ... 10 V,
with EX-protection for all potentially explosive atmospheres
Ex qualification: II 2G Ex ia/ib IIC/T4
(Further Information please refer to our homepage www.greisinger.de)



Ex-design types:

Ex protection:  II 2 G Ex ia IIC T4
EC type examination: BVS 11 ATEX 1 333 X




Connection data:
U_{max}: 28 V
I_{max}: 100 mA
P_{max}: 1.2 W (for GIA 0420 N-EX) or 0.95 W (for GIA 010 N-EX)

max. effective internal capacitance:
Ci = 13 nF (for GIA 0420 ...) or 26 nF (for GIA 010 ...)
additionally for the switching output: Ci = 4.5 nF
max. effective internal inductance: negligible small

Please keep in mind for the circuit of the optionally available switching output that the wiring has to be done from the same intrinsically safe circuit as the measuring signal!



UNIVERSAL DISPLAY FOR STANDARD SIGNALS



GIA 2448

Art. no. 600090 (standard model)

Display for Standard Signals (for self-adjustment)

GIA 2448 WE ¹⁾

Display for Standard Signals (settings and calibrations by our works)

1) Please specify as follows upon order: Input signal, scaling (lower and upper limits), decimal point and supply voltage. (Order to read e.g. GIA 2448 WE: 4-20 mA, 4 mA=-50.0, 20 mA = 100.0, 12 VDC)

Specifications:	
Measuring input:	0 ... 20 V, 0 ... 10 V, 0 ... 2 V, 0 ... 1 V, 0 ... 200 mV, 0 ... 20 mA and 4 ... 20 mA (select via soldering jumpers)
Display range:	-1999 ... +1999 digit (adjustable via soldering jumpers and potentiometer)
Decimal point:	any position by means of soldering jumpers (soldering jumpers accessible after removal of front panel)
Accuracy:	±0.2 % ±1 digit (at nominal temperature = 25 °C)
Scan rate:	approx. 3 measurements / s
Display:	3½-digit, red 10 mm high LED display
Working temperature:	0 ... 50 °C (permissible ambient temperature)
Relative humidity:	5 ... 95 % RH (non-condensing)
Storage temperature:	-20 ... +70 °C
Storage temperature:	8 ... 20 V DC or 18 ... 29 V DC (standard) (set via soldering jumper)
Current supply:	max. 20 mA
Panel mounting:	with VA-spring clamp. allowed panel thicknesses from 1 ... approx. 10 mm
Connection terminal:	4-pin screw-type/plug-in terminal for wire cross sections from 0.14 ... 1.5 mm ²
Protection rating:	front side IP54
Housing:	glass fibre reinforced Noryl, front panel PC
Dimensions:	48 x 24 mm (W x H) (front frame)
Mounting depth:	approx. 65 mm (incl. screw-type/plug-in terminal)
Panel cut-out:	45 ^{+0.5} x 21,7 ^{+0.5} mm (W x H).
Scope of supply:	Device, manual

Option:

VAC

8 ... 20 V AC or 18 ... 27 V AC set via soldering jumper

G12

11 ... 13 V DC, electrically isolated

G24

22 ... 27 V DC, electrically isolated

Accessories and spare parts:

GNG 220/2-12V

Art. no. 600305

power supply for GIA 2448 and GTH 2448
(Input: 230 VAC; output: 2 x 12 VDC regulated, 30 mA each)

GNG 12 / 24

Art. no. 600276

DC/DC-converter to electrically isolate 12 V DC-supply voltages



GNG 24 / 24

Art. no. 600277

DC/DC-converter to electrically isolate 24 V DC-supply voltages

for additional accessories, transmitter, probes p.r.t. chapters transmitter and temperature probe

UNIVERSAL DISPLAY FOR TEMPERATURE



GTH 2448/1

Art. no. 600083

Display for temperature (NiCr-Ni)

GTH 2448/2

Art. no. 600084

Display for temperature (Pt100)

GTH 2448/3

Art. no. 600085

Display for temperature (Pt100)

GTH 2448/4

Art. no. 600086

Display for temperature (Pt1000)

GTH 2448/5

Art. no. 600087

Display for temperature (Pt1000)

Specifications:	
Measuring input, Resolution:	
GTH 2448/1:	-50 ... +1150 °C (NiCr-Ni)
GTH 2448/2:	-200 ... +650 °C (Pt100, 2-wire), 1 °C
GTH 2448/3:	-60.0 ... +199.9 °C (Pt100, 2-wire), 0.1 °C
GTH 2448/4:	-200 ... +650 °C (Pt1000, 2-wire), 1 °C
GTH 2448/5:	-60.0 ... +199.9 °C (Pt1000, 2-wire), 0.1 °C
Accuracy: (at nominal temperature = 25 °C)	
NiCr-Ni:	±1 % ±1 digit (from -20 ... +550 °C and 920 ... 1150 °C) ±1.5 % ±1 digit (from 550 ... 920 °C)
Pt100, Pt1000:	±0.5 °C ±1 digit or ±1 °C ±1 digit
Offset compensation: (only for Pt100 and Pt1000)	The zero point offset of the sensor (e.g. due to long cables) can be compensated for by means of the spindle trimmer on the backside of the device.
Display:	3½-digit, red 10 mm high LED display
Scan rate:	approx. 3 measurements / s
Working temperature:	0 ... 50 °C (permissible ambient temperature)
Relative humidity:	5 ... 95 % RH (non-condensing)
Storage temperature:	-20 ... +70 °C
Voltage supply:	8 ... 20 V DC or 18 ... 29 V DC (standard) (set via soldering jumper)
Current supply:	max. 20 mA
Panel mounting:	with VA-spring clamp. allowed panel thicknesses from 1 ... approx. 10 mm
Connection terminal:	4-pin screw-type/plug-in terminal for wire cross sections from 0.14 ... 1.5 mm ²
Protection rating:	front side IP54
Housing:	glass fibre reinforced Noryl, front panel PC
Dimensions:	48 x 24 mm (W x H) (front frame)
Mounting depth:	approx. 65 mm (incl. screw-type/plug-in terminal)
Panel cut-out:	45 ^{+0.5} x 21,7 ^{+0.5} mm (W x H)
Scope of supply:	Device, manual

System solution - complete packages:

KFZ 2000

Art. no. 603241

Exhaust gas temperature set for measurement of exhaust gas temperatures up to 1000 °C in motor vehicles (e.g. motorsports). The set consists of:

GTH 2448/1 12 V DC:

Art. no. 601017

NiCr-Ni thermometer with additional over-voltage protection

GTF 101-5-30-0150-L03-S:

Art. no. 601317

temperature probe with jacket material: Nimonic 75 (view p.r.t. page 207)


Cable length = 3 m, extended cable against upcharge available

GKV 4:

Art. no. 602891

clamping ring screw connection (p.r.t. page 219)

UNIVERSAL DISPLAY AND REGULATING DEVICE



Option: Frontpanel with push buttons
(frontpanel without buttons included in delivery)

HIGHLIGHTS:

- Universal inputs for normalized signals, frequency, Pt100, Pt1000 and thermocouples
- Configurable as display or controller (5 switching functions)
- extensive self-monitoring and diagnostic system
- Limit functions, digital filter, min-/max value memory
- Alarm delay selectable

GIA 20 EB

Art. no. 601832 (standard model)

Universal display and regulating device

Specifications:	
Measuring input:	universal input for
Normalized signal:	4 ... 20 mA, 0 ... 20 mA, 0 ... 1 V, 0 ... 2 V, 0 ... 10 V, 0 ... 50 mV
Resistance thermometer:	Pt100 (3-wire), Pt1000 (2-wire)
Thermocouples:	Types J, K, N, S, T
Frequency, rotational speed:	TTL-signal, switching contact
Counter up / down:	TTL-signal, switching contact
Serial interface	
Measuring rate:	approx. 100 measurings / s (for normalized signal) resp. approx. 4 measurings / s (for temperature and frequency)
Measuring resp. display ranges, resolution:	
Temperature:	(display unit selectable: °C or °F) Pt100: -200 ... +850 °C or -50.0 ... +200.0 °C; Pt1000: -200 ... +850 °C; Type J: -170 ... +950 °C; Type K: -270 ... +1350 °C; Type N: -270 ... +1300 °C; Type S: -50 ... +1750 °C; Type T: -270 ... +400 °C
Normalized signals:	-1999 ... 9999 digit, start and end value and DP freely scaleable
recommended range:	≤2000 digit
Frequency:	0.000 Hz ... 10 kHz, display freely scaleable
Rotational speed:	0.000 U/min ... 9999 U/min, selectable prescaler: 1 ... 1000
Counter up/down:	countervalue remains on power loss 0 ... 9999 (10 Mio. with prescaler), pulse frequency: ≤10 kHz, selectable prescaler: 1 ... 1000
Serial interface:	Displaying and controlling from values coming via the serial interface.
Accuracy: (at nominal temperature = 25 °C)	
Normalized signal:	<0.2 % FS ±1 digit (at 0 ... 50 mV: <0.3 % FS ±1 digit)
Resistance thermometer:	<0.5 % FS ±1 digit
Thermocouples:	<0.3 % FS ±1 digit (at type S: <0.5 % FS ±1 digit)
Point of comparison:	±1 °C
Frequency, rotational speed, counter:	<0.1 % FS ±1 digit
Outputs:	2 switching outputs, not electrically isolated
Switching behavior:	Low-Side, High-Side or Push-Pull (selectable)
Connection data:	Low-Side: 28V/1 A; High-Side: Ub/200 mA
Controller state:	2-point, 3-point, 2-point with alarm, min/max alarm to 1 output, min/max alarm to 2 outputs
Switching point, hysteresis:	freely adjustable
Response time:	≤20 ms with standard signal ≤0.5 s with temperature and frequency
Display:	approx. 10 mm high, 4-digit red LED-display
Service:	with 3 push-buttons (after disassembly of the frontpanel)
Option:	FS3T, frontpanel with 3 push-buttons for comfortable configuration. Trouble-free replacement is possible (refer accessories)
Interface:	serial interface, electrical isolated, EASYBus compatible
Miscellaneous:	constant self-diagnosis, digital filter function, measuring range limiting

Voltage supply:	9 ... 28 V DC (Standard)
Option:	electrical isolated voltage supply 11 ... 13 V (G12) or 22 ... 27 V (G24)
Power consumption:	max. 30 mA (without outputs)
Nominal temperature:	25 °C
Working temperature:	-20 ... +50 °C
Relative humidity:	0 ... 80 % RH (non condensing)
Storage temperature:	-30 ... +70 °C
Panel mounting:	with VA-spring clamp
Allowed panel thicknesses:	from 1 ... approx. 10 mm
Connection terminal:	screw-type/plug-in terminal: 2-pin for interface and 9-pin for other connections. For wire cross sections from 0.14 ... 1.5 mm ² .
Protection rating:	front side IP54
Housing:	glass fibre reinforced Noryl, front panel polycarbonate
Dimensions:	48 x 24 mm (W x H) (front frame)
Mounting depth:	approx. 65 mm (incl. screw-type/plug-in terminal)
Panelcut-out:	45 ^{+0.5} x 21,7 ^{+0.5} mm (W x H)
Scope of supply:	Device, manual

Standard variants:

GIA 20 EB-G12

Art. no. 604305

Type with insulated power supply: 11 ... 13 V DC

GIA 20 EB-G24

Art. no. 601983

Type with insulated power supply: 22 ... 27 V DC

Accessories and spare parts:

FS3T

Art. no. 603215

Frontpanel with 3 push-buttons for comfortable configuration, for adjustments at variable switching points, calling of min- and max-values etc.

GNR 10

Art. no. 603680

Power supply and relay module for one GIA20EB (p.r.t. page 135)

(Input: 230 V AC, Power supply for device + transducer, 2 relay outputs)

Temperature probes

p.r.t. page 205-220

Transducer

p.r.t. page 165-204

Special design types:

GIA 20 EB / PK

Art. no. 600968

Universal display and regulating device with individual programmable linearization characteristic.

General:

Even heavily bent sensor characteristics/value curves can be approximated by a straightened curve with 30 freely programmable linearization points.

The adjustment to the measurement is done via the integrated interface with the (free) configuration software. For the connection with a PC, an additional serial converter EBW 1 or EBW 3 will be needed. Therefore only the input values (in mA, V, Ω or Hz) and the corresponding displayed values have to be entered.

For detailed information please refer to our homepage www.greisinger.de

THE DISPLAYING AND REGULATING DEVICE FOR 230 V



GIR 230 NS

Art. no. 600972

GIR 230 Pt

Art. no. 600976

GIR 230 TC

Art. no. 600978

GIR 230 FR

Art. no. 600970

GIR 230 NT

Art. no. 600974

Version GIR 230 NS (normalized signal):

Measuring input:	4 ... 20 mA, 0 ... 20 mA, 0 ... 10 V
Display range:	-1999 ... 9999 digit, initial value, final value and DP freely adjustable
Recommended range:	≤2000 digit
Accuracy:	<0.2 % FS ±1 digit (at nominal temperature = 25 °C)
Measuring rate:	approx. 100 measurings / s

Version GIR 230 Pt (resistor):

Measuring input:	Pt100 (3-wire), Pt1000 (2-wire)
Measuring ranges, resolution:	Pt100: -200 ... +850 °C (1°) or -50,0 ... +200,0 °C (0.1°) Pt1000: -200 ... +850 °C
Accuracy:	<0.5 % FS ±1 digit (at nominal temperature = 25 °C)
Measuring rate:	approx. 4 measurings / s

Version GIR 230 TC (thermo couple):

Measuring input:	types J, K, N, S, T and 0 ... 50 mV
Measuring ranges, resolution:	Type J: -170 ... +950 °C, Type K: -270 ... +1350 °C, Type N: -270 ... +1300 °C, Type S: -50 ... +1750 °C, Type T: -270 ... +400 °C
Accuracy:	<0.3 % FS ±1 digit (type S: <0.5 % FS ±1 digit) (at 25 °C)
Point of comparison:	±1 °C
Measuring rate:	approx. 4 measurings / s

Version GIR 230 FR (frequency):

Measuring input:	frequency
Display range:	-1999 ... 9999 digit, freely scaleable
Accuracy:	<0.2 % FS ±1 digit (at nominal temperature = 25 °C)
Frequency measuring:	0.000 Hz ... 10 kHz
Rotational speed:	0.000 U/min ... 9999 U/min, selectable prescaler (1 ... 1000)
Counter up/down:	0 ... 9999 (10 mio with prescaler)

Version GIR 230 NT (NTC and only 1 relay output):

Measuring input:	NTC (2-wire)
Measuring ranges:	-40.0 ... +120.0 °C
Accuracy:	<0.5 % FS ±1 digit (at nominal temperature = 25 °C)
Measuring rate:	approx. 4 measurings / s

Accessories and spare parts:

GTF 230 S

Art. no. 603014

NTC-temperature probe, -40 ... +120 °C, sensor sleeve made of stainless steel, Ø 5 x 50 mm, approx. 1 m silicone-cable

GTF 230 S-L03

Art. no. 605910

see above, approx. 3 m silicone cable

GTF 230 S-L05

Art. no. 604620

see above, approx. 5 m silicone cable

HIGHLIGHTS:

- 5 input executions for choice:
- 2 integrated switching outputs
- Display or controller
- Comprehensive self-monitoring
- Limit function

GIR 230 DIF-PT...

Art. no. 600982

Difference controller with 2 measuring inputs for Pt1000

GIR 230 DIF-NT...

Art. no. 600984

Difference controller with 2 measuring inputs for NTC

GIR 230 DIF-NS...

Art. no. 600980

Difference controller with 2 measuring inputs for 4 ... 20 mA, 0 ... 20 mA or 0 ... 10 V

Version GIR 230 DIF-PT1000, GIR 230 DIF-NT:

Measuring inputs:	2 x Pt1000 (2-wire) or 2 x NTC
Measuring ranges, resolution:	Pt1000: -200 ... +850 °C, 1 °C NTC: -40.0 ... +120.0 °C, 0.1 °C
Display:	difference temperature sensor 1 - sensor 2
Accuracy:	<0.5 % FS ±1 digit (at nominal temperature = 25 °C)
Measuring rate:	approx. 4 measurings / s

Version GIR 230 DIF-NS - 420 mA, ... - 020 mA, ... - 010 V:

Measuring inputs:	(2 x) 4 ... 20 mA, (2 x) 0 ... 20 mA or (2 x) 0 ... 10 V specify required input signals by order!
Display range:	-1999 ... 9999 digit, start and end value and DP freely adjustable
Recommended range:	≤2000 digit
Accuracy:	<0.2 % FS ±1 digit (at nominal temperature = 25 °C)
Measuring rate:	approx. 100 measurings / s

Specifications:

Relay output:	2 (1) closing contacts (GIR 230 NTC: 1 relay output), 230 V~ switching, switching power: 5 A, 230 V AC
Alarm output:	NPN, open collector, switching power: 30 mA, max. 28 V
Controller states:	2-point, 3-point*, 2-point with alarm, min / max alarm to 1 output, min / max alarm to 2 outputs* (* = not available at GIR 230 NT)
Switching points, hysteresis, alarm points:	freely selectable
Display:	approx. 10 mm high, 4-digit red LED-display
Operating conditions:	-20 ... +50 °C, 0 ... 80 % RH (non condensing)
Voltage supply:	230 V, 50 / 60 Hz, approx. 2 VA
Panel mounting:	with VA-spring clamp
Allowed panel thicknesses:	from 1 ... approx. 10 mm
Connection terminal via screw-type/plug-in terminal:	
4-pin (...NTC: 3-pin)	for power supply and relay outputs
4-pin (...NTC: 3-pin)	for measuring input and alarm output
For wire cross selections:	from 0.14 ... 1.5 mm².
Protection rating:	front side IP54
Housing:	glass fibre reinforced Noryl, front panel polycarbonate
Dimensions:	48 x 24 mm (W x H) (front frame)
Mounting depth:	approx. 65 mm (incl. screw-type/plug-in terminal)
Panel cut-out:	45 ^{+0.5} x 21,7 ^{+0.5} mm (W x H)
Scope of supply:	Device, manual

Options:

SA1

Power supply 12 ... 28 V DC, Outputs: 2 (1) relay outputs, +Ub switching

SA2

Power supply 12 ... 24 V AC


SA3

Power supply 12 V DC, electrically isolated

SA4

Power supply 24 V DC, electrically isolated

UNIVERSAL DISPLAYING AND CONTROLLING DEVICE



HIGHLIGHTS:

- Universal input for standard signals, frequency, Pt100, Pt1000 and thermocouples
- 2 integrated switching outputs (electrically isolated)
- Configurable as display or controller (5 switching functions)
- Fast controlling and monitoring
- Comprehensive self-test and diagnostic system

GIR 300

Art. no. 604692 (standard model)

Universal displaying and controlling device

Specifications:	
Measuring input:	universal input for
Normalized signal:	4 ... 20 mA, 0 ... 20 mA, 0 ... 1 V, 0 ... 2 V, 0 ... 10 V, 0 ... 50 mV
Resistance thermometer:	Pt100 (3-wire), Pt1000 (2-wire)
Thermocouples:	Types J, K, N, S, T
Frequency, rotational speed:	TTL signal, switching contact
Up- / down- counter:	TTL signal, switching contact
Serial interface	
Measuring rate:	approx. 100 measurements / s (standard signal) or approx. 4 measurements / s (temperature and frequency)
Measuring and display range, resolution:	
Temperature: (unit switchable between °C and °F)	Pt100: -200 ... +850 °C bzw. -50,0 ... +200,0 °C; Pt1000: -200 ... +850 °C; Type J: -170 ... +950 °C; Type K: -270 ... +1350 °C; Type N: -270 ... +1300 °C; Type S: -50 ... +1750 °C; Type T: -270 ... +400 °C
Standard signals:	digit, decimal point, start and end value freely selectable
recommended range:	≤2000 digit
Frequency:	0.000 Hz ... 10 kHz, display freely scalable
Rotational speed:	0.000 U/min ... 9999 U/min, selectable prescaler: 1 ... 1000
Up- / down- counter:	The counter reading is stored also in power-down state. 0 ... 9999 (10 million with prescaler), pulse frequency: ≤10 kHz, selectable prescaler: 1 ... 1000
Serial interface:	Display and control functions with values obtained via serial interface
Accuracy: (at nominal temperature = 25 °C)	
Normalized signal:	<0.2 % FS ±1 digit (at 0 ... 50 mV: <0.3 % FS ±1 digit)
Resistance thermometer:	<0.5 % FS ±1 digit
Thermocouples:	<0.3 % FS ±1 digit (for type S: <0.5 % FS ±1 digit)
Point of comparison accuracy:	±1 °C
Frequency, rotational speed, counter:	<0.1 % FS ±1 digit
Outputs:	2 volt-free relay switching outputs relay 1: normally-open contact relay 2: normally-closed contact
Switching functions:	2-point, 3-point, 2-point with alarm, combined min-/max-alarm with 1 output, separate min-/max- alarm with 2 outputs
Switching points, switching hysteresis:	freely selectable
Response time:	≤20 ms for standard signals ≤0.5 s for temperature and frequency
Display:	approx. 13 mm high, 4-digit red LED display
Interface:	serial interface, electrically isolated, compatible to EASYBus
Miscellaneous:	continuous self-diagnostics, digital filter function, measuring range limitation
Voltage supply:	9 ... 28 V DC (standard)
Option:	G24: 9 ... 28 V DC, electrically isolated

Power consumption:	max. 70 mA
Nominal temperature:	25 °C
Working temperature:	-20 ... +50 °C
Relative humidity:	0 ... 80 % RH (non condensing)
Storage temperature:	-30 ... +70 °C
Panel mounting:	with fixing clamps
Electric connection:	via screw-type/plug-in terminals cable cross section: 0.14 ... 1.5 mm².

Housing

Dimensions:	72 x 36 mm (W x H) (front frame)
Installation depth:	approx. 75 mm (incl. screw-type/plug-in terminals)
Panelcut-out:	68,5 ^{+0.5} x 32,0 ^{+0.5} mm (W x H)
Scope of supply:	Device, manual

Variant:

GIR 300-G24

Art. no. 605203

GIR 300 with electrically isolated supply 9 ... 28 V DC


Accessories and spare parts:

APG-7

Art. no. 606825

Housing for surface mounting incl. seal GGD4896

UNIVERSAL COUNTER AND FREQUENCY DEVICE



- HIGHLIGHTS:
- 6-digit display
 - Assembly, dismantling, sum and difference counter
 - 2 integrated switching outputs (galvanically isolated)
 - Configurable as display or controller (5 switching functions)
 - Extensive self-monitoring and diagnostic system


GIR 360
Art. no. 607953
Freely selectable universal counter and frequency meter

Specifications:	
Inputs	
Input 1:	frequency, rotational speed, counter input A
Input voltage:	0 ... 5 V (0 ... 28 V with dropping resistor)
Input level:	Low <0.5 V; High >2.2 V
NPN:	pullup resistor 7 kohms to 3.3 V
PNP:	pulldown resistor 7 kohms against GND
Min. pulse width:	50 us
Input 2:	count input B, Gate, direction
Input voltage:	0 ... 5 V (0 ... 28 V with dropping resistor)
Input level:	Low <0.5 V; High >2.2 V
NPN:	pullup resistor 7 kohms to 3.3 V
PNP:	pulldown resistor 7 kohms against GND
Min. pulse width:	50 us
Input 3:	reset input
Input level:	Low <1 V; High >8 V
Min. pulse width:	50 ms
Measuring / counting areas:	
Frequency:	0 ... 10 kHz
Speed:	max. 10000 U/min, switchable prescaler: 1 ... 1000
Counter:	-2.147.483.647 ... 2.147.483.646
Display area	
Frequency / Speed:	-1999 ... 9999 digit, decimal point freely selectable
Counter:	-199999 ... 999999 digit, decimal point freely selectable
Functions:	
Frequency measurement	
Speed measurement,	
Up counter, down counter	
Up / down counter with direction input	
Totalizer A + B,	
Difference counter A-B, phase discriminator	
Display:	approx. 10 mm high, 6-digit red LED display
Outputs:	
2 volt-free relay switching outputs	
relay 1: normally-open contact	
relay 2: normally-closed contact	
Switching functions:	2-point, 3-point, 2-point with alarm, combined min-/max-alarm with 1 output, separate min-/max- alarm with 2 outputs
Switching points, switching hysteresis:	freely selectable
Interface:	serial interface, electrically isolated, compatible to EASYBus
Miscellaneous:	continuous self-diagnostics, digital filter function, measuring range limitation
Voltage supply:	9 ... 28 V DC (standard)
Optional:	G24: 9 ... 28 V DC, electrically isolated

Power consumption:	max. 70 mA
Nominal temperature:	25 °C
Working temperature:	-20 ... +50 °C
Relative humidity:	0 ... 80 % RH (non condensing)
Storage temperature:	-30 ... +70 °C
Panel mounting:	with fixing clamps
Electric connection:	via screw-type/plug-in terminals cable cross section: 0.14 ... 1.5 mm².
Housing	
Dimensions:	72 x 36 mm (W x H) (front frame)
Installation depth:	approx. 75 mm (incl. screw-type/plug-in terminals)
Panelcut-out:	68,5 ^{+0.5} x 32,0 ^{+0.5} mm (W x H)
Scope of supply:	Device, manual

Variant:	
GIR 360-G24	
Art. no. 607954	
GIR 300 with electrically isolated supply 9 ... 28 V DC	
Accessories and spare parts:	
APG-7	
Art. no. 606825	
Housing for surface mounting incl. seal GGD4896	

UNIVERSAL DISPLAYING DEVICE



HIGHLIGHTS:

- Universal inputs for normalized signals, frequency, Pt100, Pt1000 and thermocouples, freely adjustable
- Integrated isolated power supply for measuring transducer (24V / 22 mA)
- Extensive self-monitoring and diagnostic system
- Serial interface - EASYBus
- Limit functions, digital filter, min-/max value memory

GIA 2000

Art. no. 600963 (standard model)
Universal Displaying Device

Specifications:	
Measuring input: universal input (freely adjustable) for	
Normalized signal:	4 ... 20 mA, 0 ... 20 mA, 0 ... 1 V, 0 ... 2 V, 0 ... 10 V, 0 ... 50 mV
Resistance thermometer:	Pt100 (3-wire), Pt1000 (2-wire)
Thermocouples:	Types J, K, N, S, T
Frequency:	TTL-signal, switching contact
Flow, Rotational speed:	TTL-signal, switching contact
Counter up / down:	TTL-signal, switching contact
Serial interface	
Measuring rate:	approx. 100 measurements / s (for normalized signal and frequency) or approx. 4 measurements / s (for temperature)
Measuring resp. display ranges, resolution:	
Temperature: (display unit selectable: °C or °F)	Pt100: -200 ... +850 °C or -50.0 ... +200.0 °C; Pt1000: -200 ... +850 °C; Type J: -170 ... +950 °C or -70.0 ... +300.0 °C; Type K: -270 ... +1372 °C or -70.0 ... +250.0 °C; Type N: -270 ... +1350 °C or -100.0 ... +300.0 °C; Type S: -50 ... +1750 °C; Type T: -270 ... +400 °C or -70.0 ... +200.0 °C
Normalized signals:	digit, decimal point, start and end value freely selectable
recommended range:	≤2000 digit
Frequency:	0.000 Hz ... 10 kHz, display freely scalable
Rotational speed:	0.000 U/min ... 9999 U/min, selectable prescaler: 1 ... 1000
Flow:	0 ... 9999 l/s, 0 ... 9999 l/min, 0 ... 9999 l/h
Counter up/down:	counter value remains on power loss 0 ... 9999 (10 mio. with prescaler), pulse frequency: ≤10 kHz
Serial interface:	Displaying and controlling from values coming via the serial interface.
Accuracy: (at nominal temperature = 25 °C)	
Normalized signal:	<0.2 % FS ±1 digit (at 0 ... 50 mV: <0.3 % FS ±1 digit)
Resistance thermometer:	<0.3 % FS ±1 digit
Thermocouples:	<0.3 % FS ±1 digit (at type S: <0.5 % FS ±1 digit)
Point of comparison:	±1 °C
Frequency, rotational speed, counter:	<0.1 % FS ±1 digit
Analog output: (option)	freely scalable analogue output 0 ... 20 mA / 4 ... 20 mA or 0 ... 10 V
Display:	approx. 13 mm high, 4-digit red LED-display
Interface:	serial interface, electrical isolated, EASYBus compatible
Power supply for sensor:	integrated isolated power supply for measuring transducer: 24 V DC ±5 %, 22 mA (for DC-supply 18 V DC)
Miscellaneous:	permanent self-monitoring, digital filter function, measuring range boundary (limit)
Voltage supply:	230 V AC, 50/60 Hz (standard)
Power consumption:	approx. 5 VA
Working temperature:	-20 ... +50 °C
Relative humidity:	0 ... 80 % RH (non condensing)
Storage temperature:	-30 ... +70 °C

Panel mounting:	with fixing clamps
Electrical connection:	via screw-type/plug-in terminals cable diameters from 0.14 ... 1.5 mm ² .
Protection rating:	front side IP54, IP65 upon request
Housing:	rack type housing
Dimensions:	96 x 48 mm (W x H) (front frame)
Installation depth:	approx. 115 mm (incl. screw-type/plug-in terminals)
Panelcut-out:	90,5 ^{+0.5} x 43,0 ^{+0.5} mm (W x H)
Scope of supply:	Device, 2 fixing clamps, 1 sealing GGD4896, unit stickers EAK 36, screw-type/plug-in terminals, mounting- and operation manual

Variants:

GIA 2000-012D

Art. no. 602103

GIA 2000 with voltage supply: 12 V DC (11 ... 14 V)

GIA 2000-024D

Art. no. 601501

GIA 2000 with voltage supply: 24 V DC (22 ... 27 V)

GIA 2000-115A

Art. no. 604861

GIA 2000 with voltage supply: 115 V AC

GIA 2000-230A-AA

Art. no. 601405

GIA 2000 with analog output 0 ... 20 mA, 4 ... 20 mA (changeable)

GIA 2000-230A-AV

Art. no. 602725

GIA 2000 with analog output 0 ... 10 V

Accessories and spare parts:

GGD 4896

Art. no. 603042

additional sealing for panel mounting IP65

EAK 36

Art. no. 603227

Unit stickers (black with white text) for 36 different units for lettering of display devices.

°C	°F	%	pH	bar	mmHg	m
bar abs	mm	psi	mmHg	mmHg	m	
m/s	l/min	rpm	l/sec	N	Nm	
% RH	mV	g/dm ³	mm/dm ³	sh	l/s	
t	kg	l	m ³ /h	gal	l/min	
cm	Pa	kPa	MPa	inch		

EBW 3

Art. no. 601137

Interface converter for connection of one EASYBus-module (e. g. EASYLog) to the USB-interface of your PC. (Power supply via USB)

EBS 20M

Art. no. 601158

software for recording and archiving of the measuring values (p.r.t. page 100).

Temperature probes

p.r.t. page 205-220

for other accessories p.r.t. page 152-153

UNIVERSAL DISPLAYING AND REGULATING DEVICE



MIN MAX

FRONT
96 x 48CUT-OUT
90.5 x 43E.A.S.Y.BUS-
MODUL

HIGHLIGHTS:

- 2 relay switching outputs
- 1 analog output (0(4) ... 20 mA or 0 ... 10 V) (optional)
- 5 programmable switching modes
- electrical isolated power supply for a transmitter (24 V / 22 mA)
- serial interface, bus operation

ADDITIONAL FUNCTIONS GIR 2002 PID:

- P, I, PI, PD or PID control mode
- 3-point motorized valve control
- continuous regulating output (optional)

GIR 2002

Art. no. 600948 (standard model)

Universal displaying and regulating device with on/off-control mode

GIR 2002 PID

Art. no. 600951 (standard model)

Universal displaying and regulating device with PID-control mode

General:

The universal controller GIR 2002 is the ideal device for simple control systems (on/off switching, relay outputs, ...), because of its compact construction and its high ease of use. The GIR 2002 PID (basic version) supplies one control output for a 2-point-control the types of control P, I, PI, PD or PID and a second control output for on/off switching. The device can also be configured as a 3-point motorized valve controller or as controller with continuous output (optionally).

Due to the universal input and the various switching functions the controller can be optimally adapted to the requirements of the system. The structured menu navigation allows a straightforward handling and a fast adjustment of the parameters.

A LED switching position display gives information to the user about the current status of the switching outputs. The automatic self-test and diagnostic system ensures maximum operational safety and reports systems errors by conclusive error codes. The parameters are automatically saved, so that all data will be maintained even in case of a power blackout. Among others most of the Greisinger transmitters, rpm sensors and flow rate sensors can be connected directly to the integrated transmitter power supply (24 VDC/22 mA) of the controller.

If the device is used as a thermocouple or resistance thermometer, the measuring value can be alternatively displayed in °C or °F. By means of an offset correction the measured value can be scaled i.e. to the resistivity of the wires. The current and voltage inputs can be arbitrarily scaled in the range of -1999 ... +9999.

The GIR 2002 has a serial, bus-compatible interface by default, by which a comfortable adjustment of the parameters as well as recording of measured values is possible. With the optionally available Windows library EASYBUS.dll up to 240 devices can be integrated into own programs (i.e. LabView).

Application:

- process regulating
- temperature controller
- pressure monitoring
- rotation speed display
- flow counter, etc.

Specifications:

Measuring input:	Measuring / display ranges:	Accuracy (at nominal temperature):
------------------	-----------------------------	------------------------------------

Thermocouples (4 measurements / s)

FeCu-Ni: (Type J, IEC 584)	-70.0 ... +300.0 °C or -170 ... +950 °C	<0.3 % FS ±1 digit *
NiCr-Ni: (Type K, IEC 584)	-70.0 ... +250.0 °C or -270 ... +1372 °C	<0.3 % FS ±1 digit *
NiCrSi-NiSi: (Type N, IEC 584)	-100.0 ... +300.0 °C or -270 ... +1350 °C	<0.3 % FS ±1 digit *
Pt10Rh-Pt: (Type S, IEC 584)	-50 ... +1750 °C	<0.5 % FS ±1 digit *
Cu-CuNi: (Type T, IEC 584)	-70.0 ... +200.0 °C or -270 ... +400 °C	<0.3 % FS ±1 digit *

* = Point of comparison: ±1 °C

Resistance thermometer (4 measurements / s)

Pt 100: (3-wire, DIN EN 60751)	-50.0 ... +200.0 °C or -200 ... +850 °C	<0.3 % FS ±1 digit
Pt1000: (2-wire, DIN EN 60751)	-200 ... +850 °C	<0.3 % FS ±1 digit

Action signals / normalized signal (100 measurements / s)

0 ... 1 V, 0 ... 2 V, 0 ... 10 V:	-1999 ... +9999 digit, scale freely adjustable	<0.2 % FS ±1 digit
0 ... 20 mA, 4 ... 20 mA:	-1999 ... +9999 digit, scale freely adjustable	<0.2 % FS ±1 digit
0 ... 50 mV:	-1999 ... +9999 digit, scale freely adjustable	<0.3 % FS ±1 digit

Frequency

TTL-Signal:	0.000 Hz ... 10 kHz, scale freely adjustable	<0.1 % FS ±1 digit
Switching contact NPN:	0.000 Hz ... 3 kHz, scale freely adjustable	<0.1 % FS ±1 digit
Switching contact PNP:	0.000 Hz ... 1 kHz, scale freely adjustable	<0.1 % FS ±1 digit
Rotational speed:	0.000 ... 9999 U/min.	selectable prescaler: 1 ... 1000, pulse frequency: max. 600.000 Imp./min. at TTL
Flow:	0 ... 9999 l/s, 0 ... 9999 l/min or 0 ... 9999 l/h	

Counter up / down

TTL-signal, switching contact (NPN, PNP):	0 ... 9999 or 0 ... 999 000 (with prescaler) selectable prescaler: 1 ... 1000, pulse frequency: max. 10.000 Imp./s at TTL	<0.1 % FS ±1 digit
--	---	--------------------

Serial interface:

displaying and controlling from values coming via the serial interface

Outputs: Please note: Not all options are available for both device types and not all options can be combined with each other. Please see therefore the matrix on next page.

Output 1 R1: (standard version)	voltage free relay output (standard) normally-open contact, switching power: 5 A (ohmic load), 250 V AC
Optional:	H1: control output for semiconductor relay (6 V DC / 15 mA) AA1: freely scalable analog output 0(4)-20 mA AV1: 0 ... 10 V SA1: continuous output 0(4) ... 20 mA SV1: 0 ... 10 V

Output 2 R2: (standard version)	voltage free relay output (standard) change-over contact, switching power: 10 A (ohmic load), 250 V AC
Optional:	H2: control output for semiconductor relay (6 V DC / 15 mA)

Output 3: (not available at standard device type)

Optional:	R3: voltage free relay output (chance-over contact) switching power: 1 A / 40 V AC or 30 V DC H3: control output for semiconductor relay (14 VDC / 15 mA) N3: electrical isolated NPN-switching contact (max. 1 A / 30 V DC) AA3: freely scalable analog output 0(4) ... 20 mA AV3: 0 ... 10 V SA3: continuous output 0(4) ... 20 mA SV3: continuous output 0 ... 10 V
------------------	--

Controller states:	5 or 6, selectable (e.g. 2-point regulator, 3-point regulator, ...)
Switching point, hysteresis:	freely adjustable

Response time:	≤25 ms at normalized signals ≤0.5 s at temperature and frequency
-----------------------	---

Display:	approx. 13 mm high, 4-digit red LED-display
Interface:	serial interface, electrical isolated, EASYBus compatible

Power supply for sensor:	24 V DC ±2 %, 22 mA at 230 V AC power supply 18 V DC ±2 %, 22 mA at 12 V DC or 24 V DC power supply
---------------------------------	--

UNIVERSAL DISPLAYING AND REGULATING DEVICE

Miscellaneous: permanent self-monitoring, digital filter function, measuring range boundary (limit)

Voltage supply: 230 V AC, 50/60 Hz (standard)

Optional: 012D: voltage supply: 12 VDC (11 ... 14 V)
024D: voltage supply: 24 VDC (22 ... 27 V)
115A: voltage supply: 115 VAC $\pm 5\%$

Power consumption: approx. 6 VA

Operating conditions: -20 ... +50 °C, 0 ... 80 % RH (non condensing)

Panel mounting: with fixing clamps

Electrical connection: via screw-type/plug-in terminals
cable diameters from 0.14 ... 1.5 mm²

Protection rating: front side IP54, IP65 upon request

Housing: standard rack type housing

Dimensions: 96 x 48 mm (W x H) (front frame)

Panel mounting: approx. 115 mm (with fixing clamps)

Panel cut-out: 90,5^{+0.5} x 43,0^{+0.5} mm (W x H)

Scope of supply: Device, 2 fixing clamps, 1 sealing GGD4896, unit stickers EAK 36, screw-type/plug-in terminals, mounting- and operation manual

Accessories and spare parts:

GGD4896

Art. no. 603042

additional sealing for panel mounting IP65

EAK 36

Art. no. 603227

Unit stickers (black with white text) for 36 different units for lettering of display devices (p.r.t. page 124)

Temperature probes

p.r.t. page 205-220

for other accessories p.r.t. page 108, 152-153

Matrix:

Outputs

		GIR 2002			GIR 2002 PID		
		out 1	out 2	out 3	out 1	out 2	out 3
Standard type:		normally-open contact	change-over contact	--	normally-open contact	change-over contact	--
available output options							
Output 1 = Control output	H1:	•			•		
Output 2 = Control output	H2:		•			•	
Output 3 = Relay (chance-over contact)	R3:			•			•
Output 3 = Control output	H3:			•			•
Output 3 = NPN-switching output	N3:			•			•
Output 1 = Analog output 0(4) ... 20 mA	AA1:	•		no out3 possible			
Output 1 = Analog output 0 ... 10 V	AV1:	•					
Output 3 = Analog output 0(4) ... 20 mA	AA3:			•			•
Output 3 = Analog output 0 ... 10 V	AV3:			•			•
Output 1 = StetigOutput 0(4) ... 20 mA	SA1:				•		no out3 possible
Output 1 = StetigOutput 0 ... 10 V	SV1:				•		
Output 3 = StetigOutput 0(4) ... 20 mA	SA3:						•
Output 3 = StetigOutput 0 ... 10 V	SV3:						•

GIR2002 - 1 - 2 - 3 - 4 - 5 - 6

Greisinger		
1.	Supply voltage	
	230A	230 V AC, Standard
	012D	12V DC
	012DA	12V DC,
	024A	24V AC
	024D	24V DC
	024DA	24V DC,
	115A	115V AC
2.	Output 1	
	-R1	Relay, NO switch
	-H1	Solid-State-Relais
	-AA1	Analog output 0(4)...20mA
	-AV1	Analog output 0-10V
3.	Output2	
	-R2	Relay, NO switch
	-H2	Solid-State-Relais
4.	Output3	
	-00	No third output
	-R3	Relay, NO switch
	-H3	Solid-State-Relais
	-N3	NPN switch output
	-AA3	Analog output 0(4)...20mA
	-AV3	Analog output 0-10V
5.	Option	
	-00	Without option
	-NS/DIF1	Differential Controller 2x 4-20 mA
	-NS/DIF2	Differential Controller 2x 0-10V
	-NS/DIF3	Differential Controller 2x 0-20 mA
	-SW	Setpoint controller 0-10V
6.	Option	
	-IP	Protection IP65

GIR2002PID - 1 - 2 - 3 - 4 - 5 - 6

Greisinger		
1.	Supply voltage	
	230A	230 V AC, Standard
	012D	12V DC
	012DA	12V DC,
	024A	24V AC
	024D	24V DC
	024DA	24V DC,
	115A	115V AC
2.	Output 1	
	-R1	Relay, NO switch Standard
	-H1	Solid-State-Relais
	-SA1	Continuous output 0(4) ... 20 mA
	-SV1	Continuous output 0 to 10V
3.	Output 2	
	-R2	Relay, NO switch, Standard
	-H2	Solid-State-Relais
4.	Output 3	
	-00	No third output, Standard
	-R3	Relay, NO switch
	-H3	Solid-State-Relais
	-N3	NPN switch output
	-AA3	Analog output 0(4)...20mA
	-AV3	Analog output 0-10V
	-SA3	Continuous output 0 (4) .. 20 mA
	-SV3	Continuous output 0 to 10 V
5.	Input option	
	-00	Without option
	-SW	Setpoint controller 0-10V
6.	Option	
	-IP	Protection IP65

2-CHANNEL DIFFERENCE CONTROLLER



GIR 2002 NS / DIF - 020

Art. no. 604871 (standard model)

2-channel difference controller, input signal (2x) 0 ... 20 mA

GIR 2002 NS / DIF - 420

Art. no. 600960 (standard model)

2-channel difference controller, input signal (2x) 4 ... 20 mA

GIR 2002 NS / DIF - 010

Art. no. 601846 (standard model)

2-channel difference controller, input signal (2x) 0 ... 10 V

General:

The GIR 2002 NS / DIF is a display, control and regulating device for difference measurements. The measuring inputs are designed for standard signals. Please state your desired input signal at order transaction.

Application:

- difference controller for 2 channels
- detection of leaks
- control of delivery and exit air
- pressure compensation, etc.

Specifications:

Measuring inputs:	(2x) 4 ... 20 mA, (2 x) 0 ... 20 mA or (2 x) 0 ... 10 V Please state your desired input signal at order transaction!
Display range:	-1999 ... 9999 digit, decimal point, initial and final values freely selectable
Recommended range:	≤2000 digit
Accuracy:	<0.2 % FS ±1 digit (at nominal temperature = 25 °C)
Measuring rate:	approx. 100 measurements / s
Display/regulation:	difference: input 1 - input 2
Outputs:	1 normally open contact, 1 change-over contact output options like HLR-control output, analog output or continuous output available - p.r.t. previous page
Controller states:	5 or 6, selectable (e.g. 2-point-regulator, 3-point-regulator, ...)
Limit values:	freely selectable
Display:	approx. 13 mm high, 4-digit red LED-display
Operating conditions:	-20 ... +50 °C, 0 ... 80 % RH (non condensing)
Voltage supply:	230 V AC, 50/60 Hz, approx. 6 VA
Panel mounting:	with fixing clamps
Electrical connection:	via screw-type / plug-in terminals: cable diameters from 0.14 ... 1.5 mm².
Protection rating:	front side IP54, IP65 upon request
Housing:	standard rack type housing
Dimensions:	96 x 48 mm (W x H) (Front)
Installation depth:	approx. 115 mm (incl. screw-type / plug-in terminals)
Panelcut-out:	90,5 ^{+0.5} x 43,0 ^{+0.5} mm (W x H)
Scope of supply:	Device, 2 fixing clamps, 1 sealing GGD4896, unit stickers EAK 36, screw-type / plug-in terminals, mounting- and operation manual

for further technical data refer to GIR 2002 (page 122)

Option:

Output for control output, analog output and other voltage supply p.r.t. previous page

Accessories and spare parts:

EBW 3

Art. no. 601137

Interface converter for connection of one EASYBus-module to the USB interface of your PC. (Power supply: from the USB port)

EBS 20M

Art. no. 601158

20 channel measurement data acquisition software

GIA 20 EB / GIR 2002 - Configuration-Software

Software for easy configuration of the types GIA 20 EB, GIR 2002, GIR 2002 PID, download under www.greisinger.de

TEMPERATURE REGULATOR



GIR 2000 Pt

Art. no. 601701 (standard model)

Temperature regulator complete with sensor

GIR 2000 Pt OF

Art. no. 601703 (standard model)

Temperature regulator without sensor

Specifications:

Measuring input:	Pt100 (3-wire)
Measuring ranges:	-50.0 ... +200.0 °C
Resolution:	0.1 °C
Measuring rate:	approx. 4 measurements / s
Accuracy:	<0.3 % FS ±1 digit (at nominal temperature = 25 °C)
Temperature probe:	GTF200 Pt100 / 3-wire Art. no. 600018 Pt100-probe, DIN class B (±0.3 °C at 0 °C), V4A-tube Ø 5 mm 50 mm length, approx. 1 m silicone cable.
Output:	voltage free relays output, change-over-contact, switching power: 10 A (ohmic load), 250 V AC
Controller state:	2-point, min-/max-alarm
Switching point:	Activation and deactivation time freely adjustable
Response time:	≤0.5 s
Display:	approx. 13 mm high, 4-digit red LED-display
Miscellaneous:	permanent self-monitoring, digital zero point and scale adjustment
Voltage supply:	230 V AC, 50/60 Hz (standard) optionally other supply voltages are possible
Power consumption:	approx. 5 VA
Working temperature:	-20 ... +50 °C
Relative humidity:	0 ... 80 % RH (non condensing)
Storage temperature:	-30 ... +70 °C
Panel mounting:	by fixing clamps
Electrical connection:	via screw-type / plug-in terminals cable diameters from 0.14 ... 1.5 mm².
Protection rating:	front side IP54, IP65 upon request
Housing:	standard rack type housing
Dimensions:	96 x 48 mm (W x H) (front frame)
Installation depth:	approx. 115 mm (incl. screw-type / plug-in terminals)
Panelcut-out:	90,5 ^{+0.5} x 43,0 ^{+0.5} mm (W x H)
Scope of supply:	Device, 2 fixing clamps, 1 sealing GGD4896, unit stickers EAK 36, screw-type / plug-in terminals, mounting- and operation manual, GIR 2000 Pt only: probe

Accessories and spare parts:

GGD4896

Art. no. 603042

additional sealing for panel mounting IP65

APG-4

Art. no. 602827

Housing for surface mounting (incl. seal GGD4896)

Device assembled in housing, Dimensions: 125 x 75 x 127 mm (H x W x D)

(without screw connections), Cable insert: screw connections M12 x 1.5 and M16 x 1.5

additional suitable temperature probes

p.r.t. page 205-220

Standard variant:

GIR2000-PT-024D

Art. no. 603491

GIR 2000 PT with voltage supply 24 V DC (22 ... 27 V)

GIR2000-PT-OF-024D

Art. no. 602280

GIR 2000 PT OF with voltage supply 24 V DC (22 ... 27 V)



GENERAL TECHNICAL DATA



APPLICABLE FOR DEVICES
ON PAGES 125-127

FRONT
96 x 48

Specifications:

Auxiliary energy

Supply voltage: 230 V AC $\pm 10\%$ or
24 V DC $\pm 15\%$

Power consumption: max. 3.5 VA, with analog output 5 VA

CE-conformity: EN61326-1:2013; EN60664-1:2007

Display: LED red, 14.2 mm

Additional display: LED 2-digit red, 7 mm
(parameter - and output indicator)

Output

Relay: SPDT $< 250\text{ V AC}$ $< 250\text{ VA}$ $< 2\text{ A}$,
 $< 300\text{ V DC}$ $< 50\text{ W}$ $< 2\text{ A}$

Analog: 0/4 ... 20 mA burden $\leq 500\ \Omega$;
0/2 ... 10 V, burden $> 500\ \Omega$, with
isolation, automatic burden
changing

Accuracy: 0.1 %; TK 0.01 %/K

Exception:
pH9648, there is an additional
passive output, option 2A

Housing: panel case DIN 96 x 48 mm,
material PA6-GF; UL94V-0

Dimensions: Front 96 x 48 mm, mounting depth
100 mm

Exception:
A9648, version with converter
connection: Installation depth
120 mm

Weight: max. 390 g

Connection: clamp terminals, 0.08 ... 1.5 mm²,
AWG28 ... AWG14

Protection rating: front IP65, terminals IP20 acc. to
BGV A3

Scope of supply: Device, manual

VOLTAGE CONTROLLER



general
technical data
p. 125

V 9648

Digitales Voltmeter

Application:

The Digital Voltmeter V 9648 has been designed to measure DC and AC (TRMS) voltage signals. Three basic models all are selectable and makes the possibility to measure voltages from 0 ... 30.00 mV up to 0 ... 999.9 V. Within a model the measurement range is free programmable. Measuring of bipolar voltages is also possible e.g. -5 ... +5 V; or -10 ... +10 V. Additional a free programmable display range within $\pm 9999(0)$ digit can be assigned to a programmed voltage measurement range.

Specifications:

Working temperature: -10 ... +55 °C

Input: Model 1: 0 ... 4000 mV DC/AC_{TRMS}
Model 2: 0 ... 250.0 V* DC/AC_{TRMS}
Model 3: 0 ... 999.9 V DC/AC_{TRMS}

Input resistance: model 1 = 130 k Ω , model 2 = 1.3
M Ω , model 3 = 2.6 M Ω

Overload: model 1 and 2 = 300 V DC/AC_{TRMS},
model 3 = 1200 V DC/AC_{TRMS}

Accuracy: $< 0.1\% \pm 2$ digit (DC); 0.5 % ± 2
digit (AC)
crest-factor $< 3 \rightarrow$ max. 2 % error,
crest-factor $< 5 \rightarrow$ max. 5 % error

Indicating range $\pm 9999(0)$ digit with leading zero
Display: suppression

V9648- [1] - [2] - [3] - [4] - [5] - [6] - [7]

1. Terminal strip A

Programmable measuring range of:

1 0 ... 4000 mV DC/AC_{TRMS}

2 0 ... 250.0 V* DC/AC_{TRMS}

* includes e.g. $\pm 5\text{ V}$, $\pm 10\text{ V}$

3 0 ... 999.9 V DC/AC_{TRMS}

2. Terminal strip B

00 not installed

2R 2 relay outputs

3. Terminal strip C

00 not installed

2R 2 relay outputs

AO analog output 0/4 ... 20 mA, 0/2 ... 10 V

4. Terminal strip D; supply voltage

0 230 V AC $\pm 10\%$ 50-60 Hz

5 24 V DC $\pm 15\%$

5. Options

00 without option

01 min- and max-peak hold

07 display brightness programmable, only measu-
ring range 1 and 2

6. Unit appears in the unit field

7. Additional text above the display (3 x 90 mm H x W)

DIGITAL AMPEREMETER



general
technical data
p. 125

A 9648

Digital Amperemeter

Application:

The digital amperemeter A 9648 has been designed to measure DC and AC current signals. Five basic models are selectable and possible to measure currents from 0 ... 0.900 mA to 0 ... 60.0 A. The measuring range is free programmable. Measuring of bipolar currents are possible. For example -20 ... +20 mA. Additional the free programmable display range within $\pm 9999(0)$ digit can be assigned to a programmed current measurement range.

Specifications:

Working temperature: -10 ... +55 °C

Input: model 1-4 = 0 ... 0.9 mA to 6 A DC/
AC_{TRMS}
model 5 = 0 ... 4.5 to 60 A AC_{TRMS}

Input resistance: model 1 = 20 Ω , model 2 = 2 Ω ,
model 3 = 0.2 Ω , model 4 = 0.02 Ω ,
model 5 = integrated current
transformer

Accuracy: $< 0.1\% \pm 2$ digit (DC); 0.5 %
 ± 2 digit (AC)

Indicating range $\pm 9999(0)$ digit
Display:

A9648- [1] - [2] - [3] - [4] - [5] - [6] - [7]

1. Terminal strip A

1 0 ... 9.999 mA DC / AC_{TRMS}
clamp terminal

2 0 ... 99.99 mA DC / AC_{TRMS}
clamp terminal

3 0 ... 999.9 mA DC / AC_{TRMS}
clamp terminal

4 0 ... 6.000 A DC / AC_{TRMS}
clamp terminal

5 0 ... 60.00 A AC_{TRMS} winding transformer

2. Terminal strip B

00 not installed

2R 2 relay outputs

3. Terminal strip C

00 not installed

2R 2 relay outputs

AO analog output, 0/4 ... 20 mA, 0/2 ... 10 V

4. Terminal strip D; supply voltage

0 230 V AC $\pm 10\%$ 50-60 Hz

5 24 V DC $\pm 15\%$

5. Options

00 without option

01 min- and max-peak hold

07 display brightness programmable

6. Unit appears in the unit field

7. Additional text above the display (3 x 90 mm H x W)

TANK DISPLAY



general
technical data
p. 125

UNIVERSAL COUNTER



general
technical data
p. 125

TA 9648

Tank Display

Application:

The tank display TA 9648 offers content measurement of tanks with no linear connection between level and content. Measurement will be realized by hydrostatic pressure or distance sensors (e.g. ultrasonic, radar, potentiometer, etc.). The device offers the possibility to connect a level sensor. Reaching a certain level, the displayed value will be corrected automatically to the value according to the position of the installed sensor.

Specifications:

Working temperature: -10 ... +55 °C

Input

Current: 0/4 ... 20 mA; $R_i = 10 \Omega$
overload 2-times; 4-times for max. 5 s

Voltage: 0/2 ... 10 V DC; $R_i = 100 \text{ k}\Omega$
overload max. 100 V

Accuracy: <0.1 % ± 2 digit

Transmitter supply: U_s approx. 24 V; R_i approx. 150 Ω ; max. 50 mA

Indicating range Display: 999999 digit with leading zero suppression

Accessories and spare parts:

A-10, S-10, S-11, S-20 p.r.t. page 181

Pressure transmitter

GBS01, GBS02 p.r.t. page 182

well probe

TA9648- 1 - 2 - 3 - 4 - 5 - 6 - 7

1. Terminal strip A

- | | |
|---|--|
| 1 | inputs 0/4 ... 20 mA, 1 input for level correction, Integrated, transmitter supply 24 V max. 50 mA |
| 2 | as 1, but inputs 0/2 ... 10 V |

2. Terminal strip B

- | | |
|----|-----------------|
| 00 | not installed |
| 2R | 2 relay outputs |

3. Terminal strip C

- | | |
|----|---|
| 00 | not installed |
| 2R | 2 relay outputs |
| AO | analog output 0/4 ... 20 mA, 0/2 ... 10 V |

4. Terminal strip D; supply voltage

- | | |
|---|------------------------------|
| 0 | 230 V AC $\pm 10\%$ 50-60 Hz |
| 5 | 24 V DC $\pm 15\%$ |

5. Options

- | | |
|----|-----------------|
| 00 | without options |
|----|-----------------|

6. Unit appears in the unit field

7. Additional text above the display (3 x 90 mm H x W)

UZ 9648

Universal Counter

Application:

The universal counter UZ 9648 has been designed for field application in process control and automation. Parameters for operation mode can be programmed. The counter can be used wherever quantity processes should be measured, displayed and monitored.

Specifications:

Working temperature: -10 ... +55 °C

Input

PNP sensor: $R_i = 6.3 \text{ k}\Omega$
level: <4 V low; >8.5 V high;
hysteresis >2.5 V; max. 35 V DC

Namur sensor: R_i approx. 1 $\text{k}\Omega$ (<4 mA)
level: <1 mA low; >2.2 mA high;
hysteresis > 0.5 mA; max. 35 V DC

Pulse frequency: input A or B = 15 kHz,
A and B together = 6 kHz,
contact = 30 Hz debounced,
2-channel rotary encoder = 8 kHz

Counting loss: 100 μs at reset;
20 ms changing of preselect value

Min. pulse width: electronic 50 μs , contact 5 ms

Externer Reset: reset impulse ≥ 10 ms

Transmitter supply: 8 V DC (Namur), 24 V DC (PNP), R_i approx. 150 Ω ,
max. 50 mA (25 mA with 4 relay outputs)

Indicating range Display: -99999 ... +999999 digit with leading zero suppression

UZ9648- 1 - 2 - 3 - 4 - 5 - 6 - 7

1. Terminal strip A

- | | |
|---|---|
| 1 | 2 configurable count inputs, display conversion, wide range of count functions, integrated transmitter supply 24 V max. 50 mA |
|---|---|

2. Terminal strip B

- | | |
|----|-----------------|
| 00 | not installed |
| 2R | 2 relay outputs |

3. Terminal strip C

- | | |
|----|--|
| 00 | not installed |
| 2R | 2 relay outputs |
| AO | analog output 0/4 ... 20 mA, 0/2 ... 10 V DC |

4. Terminal strip D; supply voltage

- | | |
|---|------------------------------|
| 0 | 230 V AC $\pm 10\%$ 50-60 Hz |
| 5 | 24 V DC $\pm 15\%$ |

5. Options

- | | |
|----|-----------------|
| 00 | without options |
|----|-----------------|

6. Unit appears in the unit field

7. Additional text above the display (3 x 90 mm H x W)

PH AND ORP PANELMETER



general
technical data
p. 125

pH 9648

pH and ORP Panelmeter

Application:

The pH and ORP Panelmeter pH 9648 is suitable for pH and ORP measurement in food technology, chemistry within pharmaceutical and sewage-water technology. The pH 9648 operates with all common pH- and ORP electrodes. It is recommended to connect the Impedance-Converter pH40 for cable length >5 m.

Specifications:

Working temperature: -10 ... +55 °C

Input pH/Redox

Measuring ranges: -1.00 ... +15.00 pH or -1500 ... +1500 mV

R_i / Input current: >10¹² Ω / <10⁻¹² A

Accuracy: 0.2 % measuring value, ±2 Digit

pH setup: electrode zero point 4.00 ... 10.00 pH slope 40.0 ... 70.0 mV/pH

ORP setup: ±200 mV

Calibration mode: 1- or 2-point-calibration
Buffer selection possible: Schott, WTW, Ingold (Mettler Toledo), Puffer acc. to DIN 19266, or manual buffer input, Data entering for zero point and slope, ORP offset

Temperature

Sensor: Pt100 or Pt1000 (2- or 3-wire connection)

Unit: programmable °C, °F

Measuring ranges: -40.0 ... +160.0 °C (-40.0 ... +320.0 °F)

Accuracy: ±0.1 %, ±1 digit

Transmitter supply: 24 V DC, R_i approx. 150 Ω,
max. 50 mA (25 mA with 4 relay outputs)

Analog output active: 0/4 ... 20 mA burden ≤500 Ω; 0/2 ... 10 V burden >500 Ω,
isolated, automatic output changing (burden dependent)

Analog output passive: 4 ... 20 mA, ext. burden = R_A[Ω] ≤ (U_S-5 V) ÷ 0.02 A ;
supply voltage 5 ... 30 V DC

Accuracy: 0.1 %

further electrodes and accessories p.r.t page 65

pH9648- 1 - 2 - 3 - 4 - 5 - 6 - 7

1. Terminal strip A

13 input pH / ORP electrode,
temperature compensation via Pt100 / Pt1000

2. Terminal strip B

00 not installed
2R 2 relay outputs

3. Terminal strip C

00 not installed
2R 2 relay outputs
AO analog output 0/4 ... 20 mA, 0/2 ... 10 V DC
2A 2 analog outputs 4 ... 20 mA passiv

4. Terminal strip D supply voltage

0 230 V AC ±10 % 50-60 Hz
5 24 V DC ±15 %

5. Options

00 without options

6. Unit appears in the unit field

7. Additional text above the display (3 x 90 mm H x W)

CONDUCTIVITY METER



general
technical data
p. 125

LF 9648

Conductivity Meter

Application:

The conductivity measuring device LF 9648 is used for measuring the conductivity of liquids with conductive measuring cells. Depending on the conductivity of the medium, 2-electrode measuring cells (e.g. ultrapure water) or 4-electrode measuring cells (e.g. service water, washing lyes, acids, bases, etc.) are required as sensors.

Specifications:

Working temperature: -10 ... +55 °C

Inputs

MB conductivity: 0 ... 2.000(0) µS / cm up to 0 ... 2000 / 200(0) mS/cm (at 25 °C)

Cell constant: 0.080 ... 9.999

Accuracy: 0.5 % of the measuring value, ±2 digit

Temperature compensation: non linear for ultra pure water and natural water or linear
programmable from 0.000 ... 9.999 % / K

MB Temperature: -50.0 ... +200.0 °C; Sensor Pt100 or Pt1000

Accuracy: ±0.2 °C

Indicating range Display: 2000(0) Digit with leading zero suppression

Analog output

Active: 0/4 ... 20 mA burden ≤500 Ω;
0/2 ... 10 V burden >500 Ω, isolated,
automatic burden changing (burden dependent)

Passive: 4 ... 20 mA, ext. burden = R_A[Ω] ≤ (supply - 5 V) ÷ 0.02 A;
supply voltage 5 ... 30 V DC

suitable LF electrodes p.r.t page 186

LF9648- 1 - 2 - 3 - 4 - 5 - 6 - 7

1. Terminal strip A

1 input for 2- or 4-electrode-cells, temperature
compensation via Pt100
3 as 1, but temperature compensation via Pt1000

2. Terminal strip B

00 not installed
2R 2 relay outputs

3. Terminal strip C

00 not installed
2R 2 relay outputs
AO analog output 0/4 ... 20 mA, 0/2 ... 10 V DC
2A 2 analog outputs 4 ... 20 mA passive

4. Terminal strip D Supply voltage

0 230 V AC ±10 % 50 ... 60 Hz
5 24 V DC ±15 %

5. Optionen

00 without option
01 min- and max-peak hold
14 measuring/monitoring acc. to USP<645>

6. Unit appears in the unit field

7. Additional text above the display (3 x 90 mm H x W)

ALARM-DISPLAY



FRONT
96 x 48



SD 9648

Alarm-Display

Application:

The Alarm-Display SD 9648 will be used for indicating and evaluations of alarm signals. Activation with voltage free contacts, 0/24 V signals or 0/4 ... 20 mA for monitoring of analog measuring values. Programming via front-side foil keypad

Specifications:

Power supply

Supply voltage: 230 V AC $\pm 10\%$, 115 V AC $\pm 10\%$,
24 V AC $\pm 10\%$, 24 V DC $\pm 15\%$

Frequency AC: 50 / 60 Hz

Power consumption: max. 3.5 VA

Working temperature: 0 ... 50 °C

CE conformity: EN55022, EN60555, IEC61000-4-3/4/5/11/13

Inputs

Digital: 0 / 24 V DC, $R_i = 10\text{ k}\Omega$,
switching threshold low $< 4\text{ V}$, High $> 11\text{ V}$ max. 35 V

Impulse/pause: min. 10 ms

Analog: 0 / 4 ... 20 mA, $R_i = 100\ \Omega$
Max. voltage drop 2.2 V at 20 mA
Overload limit from approx. 23 mA (max. voltage 35 V).
The outputs become high-ohmic when the device is switched off

Accuracy: 0.1 %, ± 1 digit

Transmitter supply: $U_o = 24\text{ V}$, $R_i\ 150\ \Omega$, max. 50 mA

Display: LCD-dot matrix display white / blue, character height 6.5 mm,
with back-lite 2 lines 16 characters each

Display interval: 0.5 s (refresh time)

Output

Relay: SPDT $< 250\text{ V AC}$ $< 250\text{ VA}$ $< 2\text{ A}$,
 $< 300\text{ V DC}$ $< 50\text{ W}$ $< 2\text{ A}$

Housing: panel case DIN 96 x 48, Material PA6-GF; UL94V-0

Dimensions: front 96 x 48 mm, mounting depth 100 mm

Weight: max. 390 g

Connection: clamp terminals, 0.08 ... 1.5 mm², AWG28 ... AWG14

Protection class: front IP65, terminals IP20 acc. to BGV A3

Scope of supply: Device, manual

SD9648- 1 - 2 - 3 - 4 - 5

1. Inputs	
1	20 digital inputs
2	12 digital + 8 analog inputs
2. Real time clock	
0	without
1	with clock
3. Supply voltage	
0	230 V AC $\pm 10\%$ 50-60 Hz
1	115 V AC $\pm 10\%$ 50-60 Hz
4	24 V AC $\pm 10\%$ 50-60 Hz
5	24 V DC $\pm 15\%$
4. Options	
00	without option
5. Additional text above the display (3 x 90mm H x W)	

SOLID STATE RELAYS



WD28D10
WD60D20
WD60D30
WD60D45

WS28D06

Art. no. 608512

Slimline DIN-Rail Mounted SSR

WS28D12

Art. no. 608513

Slimline DIN-Rail Mounted SSR

WS60D12

Art. no. 608514

Slimline DIN-Rail Mounted SSR

General:

The WS range offers slim-line products for greater space saving. These single phase solid state relays fit a standard DIN-rail in a reduced 12 mm or 18 mm width for a minimal panel footprint. The WS SSR is a self contained device with no need for an additional heat sink.

Application:

- 6 & 12 Amps output rating
- 24 ... 280 V and 48 ... 600 VAC load voltage ratings
- 4 ... 32 VDC control voltage
- DIN rail mounting
- IP20 housing
- CE and UL / cUL
- RoHS compliant

Specifications:	WS28D06	WS28D12	WS60D12
Max. rated current:	6 A	12 A	12 A
Control voltage:	4 ... 32 VDC	4 ... 32 VDC	4 ... 32 VDC
Load voltage:	24 ... 280 VAC	24 ... 280 VAC	48 ... 600 VAC
Scope of supply:	Device	Device	Device

WD28D10

Art. no. 608515

DIN-Rail Mounted SSR with Integral Heatsink

WD60D20

Art. no. 608516

DIN-Rail Mounted SSR with Integral Heatsink

WD60D30

Art. no. 608517

DIN-Rail Mounted SSR with Integral Heatsink

WD60D45

Art. no. 608518

DIN-Rail Mounted SSR with Integral Heatsink

General:

The West family of SSRs includes WD range of DIN-rail mounted single phase devices. The relays come in 22.5 mm and 45 mm width and range up to 45 A. The SSRs can be directly mounted or DIN-rail mounted. The series also benefit from built-in heat sink with small panel footprint.

Application:

- 10, 20, 30 and 45 Amps output rating
- 24 ... 280 V and 48 ... 600 VAC load voltage ratings
- 4 ... 32 VDC control voltage
- DIN-rail or panel mounting
- Epoxy-free design
- IP20 touch-safe housing
- CE and UL / cUL
- RoHS compliant

Specifications:	WD28D10	WD60D20	WD60D30	WD60D45
Max. rated current:	10 A	20 A	30 A	45 A
Control voltage:	4 ... 32 V DC	4 ... 32 V DC	4 ... 32 V DC	4 ... 32 V DC
Load voltage:	24 ... 280 V AC	48 ... 600 V AC	48 ... 600 V AC	48 ... 600 V AC
Scope of supply:	Device	Device	Device	Device

TEMPERATURE REGULATING DEVICE



HIGHLIGHTS:

- Configuration in less than 60 s
- 18 mm actual value display
- Short installation depth
- PID regulator with automatic optimisation
- Mini programmer

MAXVU 16

Temperature regulating device

MAXVU 8

Temperature regulating device

General:

The new MAXVU is a cost-effective temperature regulating device that is easy to configure, has improved display legibility and costs related to wiring and spatial requirements are reduced to a minimum.

Save valuable time - configuration in less than 60 seconds. The MAXVU was specially designed for easy operability thanks to a simple configuration and adjustment menu accessible via the front keypad.

- Includes 10 of the most common parameter settings
- Setup in less than 60 seconds for many applications
- An expanded configuration menu can be added if necessary. The easy to use MAXVU PC software can also be used for quick configuration of multiple instruments.

Application:

MAXVU provides an affordable solution for applications with essential requirements for temperature regulation.

- Packaging lines
- Heat treatment
- General temperature control processes
- Food and beverage industry

Specifications:

Inputs: Thermocouple: B, C, J, K, L, N, R, S, T, RTD: PT100 2-wire or 3-wire, linear ranges: 0/4 ... 20 mA, 0/1 ... 5 V, 0/2 ... 10 V

Outputs: 2 or 3 output relay or SSR

Functions: PID or On/Off regulation, direction of action adjustable to 'heating exclusively' or 'heating and cooling'
2 alarms (absolute, deviation, band, loop alarm)
Self-retaining or non-self-retaining alarm outputs
One or two point calibration
Ramping and dwelling modes with variable delay time
Reset to standard values

Communication: RS485 Modbus RTU
Integrated configuration interface

Programming: Front keys or software programming

Front panel & touch panel: 3 operating buttons

Messages: Output status
Heating, cooling, alarm

Display: 1/16 DIN: 18 mm top, 10.2 mm bottom
1/8 DIN: 18 mm top, 18 mm bottom

Scope of supply: Device, manual

Accessories:

TTL / Kabel für MAXVU
9407-998-00003

Software
available for download free of charge at www.greisinger.de

MAXVU08 - 1 - 2 - 3 - 4

Greisinger		
1.	Type	
	0	Standard
2.	Supply voltage	
	-M	100 ... 240V 50Hz/60Hz AC
	-L	24 V AC / DC
3.	Out configuration	
	-AA0	Logik SSR / Logik SSR
	-AR0	Logik SSR / Relais
	-RR0	Relais / Relais
	-AAR	Logik SSR / Logik SSR / Relais
	-ARR	Logik SSR / Relais / Relais
	-RRR	Relais / Relais / Relais
4.	Optionsmodul 2	
	-0	Without
	-C	RS485 Schnittstelle (ModBus RTU)

MAXVU16 - 1 - 2 - 3 - 4

Greisinger		
1.	Type	
	0	Standard
2.	Supply voltage	
	-M	100 ... 240V 50Hz/60Hz AC
	-L	24 V AC / DC
3.	Outout configuration	
	-AA0	Logik SSR / Logik SSR
	-AR0	Logik SSR / Relais
	-RR0	Relais / Relais
	-AAR	Logik SSR / Logik SSR / Relais
	-ARR	Logik SSR / Relais / Relais
	-RRR	Relais / Relais / Relais
4.	Optionsmodul 2	
	-0	Without
	-C	RS485 Schnittstelle (ModBus RTU)

CAL DIGITAL THERMOSTAT

FRONT
77 x 35



ET 2011

Digital thermostat

General:

The series of CAL digital thermostats is a complete family of small-format devices for simple heating and cooling applications that are also equipped with displays and timers for corresponding monitoring and regulation. The devices are easy to configure and use, are equipped with a large, easily legible display and have a compact design that enables quick installation.

Application:

- Heating and cooling applications
- Thermocouple or PT100 inputs
 - 2 outputs for control and for alarms
 - Format 77 x 35 mm (B x H) (cutout 71 x 29 mm)

Specifications:

- Input:** Thermocouples (J, K, T, S, R) or PT100
- Temperature range:** PT100: -99.9 ... +300.0 °C (-99.9 ... +543.0 °F)
PT100: -200 ... +600 °C (-328 ... +1112 °F)
JT/C: 0 ... 600 °C (32 ... 1112 °F)
KT/C: 0 ... 1300 °C (32 ... 2372 °F)
TT/C: 0 ... 400 °C (32 ... 752 °F)
S & RT/C: 0 ... 1700 °C (32 ... 3092 °F)
- Regulation type:** On/Off, PID
- Regulating strategy:** Heating or cooling regulation
- Number of relay outputs (8A):** 1
- Number of SSR outputs:** 1

ET2011 - 1 - 2 - 3

Greisinger		
1.	Sensor type	
	RT-	PT100/RTD
	T-	Thermocouple
2.	Supply voltage	
	230	230 V AC 50/60Hz
	110	110VAC
	024	24 V AC
	SM	9-30 V DC / 7-24 V AC
3.	Power relay option	
	-R	8A relay
	-P	20A relay

NTC-SENSORS

SUITABLE FOR EDT 24XX

E-NTC-APS

Art. no. 608933
NTC-Sensor
Air sensor, maximum 150 °C, stainless steel casing, 1.5 m silicone cable

E-NTC-LPS

Art. no. 608935
NTC-Sensor
Liquid sensor, maximum 150 °C, stainless steel casing, 1.5 m silicone cable

DEFROSTING THERMOSTAT

FRONT
77 x 35



EDT 2411

Defrosting thermostat

EDT 2412

Defrosting thermostat

EDT 2423

Defrosting thermostat

General:

The series of CAL digital thermostats is a complete family of small-format devices. The devices are easy to configure and use, are equipped with a large, easily legible display and have a compact design that enables quick installation. The EDT defrosting models are provided with a variety of functions for the optimal regulation and performance of cooling systems, including compressor protection, real-time clock and communication.

Application:

- Compressor, defrosting and fan regulation
- Up to two NTC inputs for main and defrosting temperature measurement
- Support of manual, time-controlled and evaporator-controlled defrosting modes
- Format 35 x 77 mm (cutout 29 x 71 mm)
- Real-time clock (optional)
- RS485 communication (optional)

Specifications:	EDT2411	EDT2412	EDT2423
Type and number of inputs:	NTC x 1	NTC x 1	NTC x 2
Temperature range:	-60 ... +150 °C (-76 ... +302 °F)	-60 ... +150 °C (-76 ... +302 °F)	-60 ... +150 °C (-76 ... +302 °F)
Defrosting function:	Manual (button or DI)/automatic timer	Manual (button or DI)/automatic timer	Manual (button or DI)/timer/ evaporator temperature
Number of relay outputs (8A):	1	2	3
High-current relay (optional) - compressor output (20A):	•	•	
Defrosting output:		•	•
Fan output:			•
Defrosting sensor input:			•
Real-time clock (optional):	•	•	•
RS485 Modbus communication (optional):	•	•	•

EDT 24- 1 - 2 - 3 - 4

ordering code:	
1.	Number of inputs and outputs
11	1x NTC input, 1 x relay output
12	1x NTC input, 2 x relay output
23	2x NTC input, 3x relay output (2nd o/p for evap' temp')
2.	Supply voltage
230	230 V AC
110	110 V AC
12	12 V AC/DC
24	24 V AC/DC
3.	Compressor relay output
R	8A
P	20A output (not with EDT2423)
4.	Options
none	(blank)
RTC	real-time clock (only with 8A relay)
RS	Modbus RTU

TEMPERATURE CONTROLLER



FRONT
48 x 48

**KM**

Temperature controller

General:

Self-optimizing, microprocessor controlled digital controller with 2-, 3- point or PID control mode, timer function, programmer function, 3-point step control mode with selectable setpoint gradient (ramp function)

Application:

- industrial burner
- thermal power station
- medical technology
- plastic injection moulding
- kitchen technology

Specifications:**Inputs:**

Semiconductor: PTC KTY 81-121: -50 ... +150 °C ±0.5 % of i.v.+1 digit

Resistance thermometer: Pt100 / 3-wire: -200 ... +850 °C ±0.5 % of i.v.+1 digit
Pt1000 / 2-wire: -200 ... +850 °C ±0.5 % of i.v.+1 digit

Thermocouple: Type J: -50 ... +1000 °C ±0.5 % of i.v.+1 digit
Type K: -50 ... +1370 °C ±0.5 % of i.v.+1 digit
Type S: -50 ... +1760 °C ±1 % of i.v.+1 digit
Type R: -50 ... +1760 °C ±0.5 % of i.v.+1 digit
Type T: -70 ... +400 °C ±0.5 % of i.v.+1 digit
0 ... 50 mV, 0(12) ... 60 mV:
-1999 ... +9999 ±0.5 % of i.v. +1 digit

Standard signal: 0(4) ... 20 mA: -1999 ... +9999 ±0.5 % of i.v. +1 digit
0(1) ... 5 V, 0(2)...10 V: -1999 ... +9999 ±0.5 % of i.v. +1 digit

Outputs

Output OUT1: Relay: normally-open contact, 4 A / 2 A / 240 VAC
Semiconductor relay connection: 12 VDC, 12 mA
Analog output: (0/4... 20 mA, 0/2... 10 V) (KM3 only)

Output OUT2: Relay: normally-open contact, 4 A / 2 A / 240 VAC
Semiconductor relay connection: 12 VDC, 12 mA

Output OUT3: Relay: normally-open contact, 4 A / 2 A / 240 VAC
Semiconductor relay connection: 12 VDC, 12 mA

Output OUT4: Semiconductor relay connection:
12 VDC, 12 mA (programmable)

Control mode: 2-point (on / off), 3-point (neutral zone), PID, double PID

Display: two-rowed

7-segment LED: 4-digit, red / green / orange, 15.5 mm

Additional display: set value display, green, 7 mm

Resolution

Temperature: 1 °C or 0.1 °C in range -99.9 ... +999.9 °C

Current / voltage: freely scalable, decimal point setable

Temperature unit: °C, °F

Supply: 24 VAC / DC ±10 %, 50 / 60 Hz
100 ... 240 VAC ±10 %, 50 / 60 Hz

Configuration interface: TTL 5-pole

Control input: 1 or 2 potential-free inputs

Transmitter supply: 12 VDC / 20 mA

COM interface: serial RS 485 (ModBus)

Housing:

Protection class (Front): IP65

Connection: screw terminals (fixed)

Dimensions: 48 x 48 x 63 mm (W x H x D)

Scope of supply: Device, manual

HIGHLIGHTS:

- Installation depth only 63 mm
- Plug-in connection terminals
- Clear visualization of the switching state
- Multifunction input
- Presetting via configuration code
- KM 3 with analog output

KM - **1** - **2** - **3** - **4** - **5** - **6** - **7** - **8** - **9** - **10**

Greisinger		
1.	Type	
	1	KM1
	3	KM3
2.	Function	
	-	None
	T	Controller + timer
	P	Controller + Timer + Programmer
3.	Power supply	
	L	24V
	H	100...240V
4.	Input combinations	
	C	TC, mV, RTD, mA, V
	E	TC, mV, PTC, NTC, mA, V
5.	OUT1	
	R	Relay
	O	SSR drive
	I	Normsingal mA, V
6.	OUT2	
	R	Relay
	O	SSR drive
	M	Motor valve driving
	-	None
7.	OUT3	
	R	Relay
	O	SSR drive
	M	Motor valve driving
	-	None
8.	OUT4	
	D	SSR drive
9.	Interface	
	S	RS 485
	-	None
10.	Terminals	
	E	Plug-in type
	N	Plug-in type (fix part only)
	gmsd	Fixed screw type

Standard design types (available ex stock):**KM-1 HCRRRD--**

Art. no. 605743

KM 1 with 100 ... 240 V AC (power supply), TC, Pt100, Pt1000, mA, mV, V + digital input 1 (input), relay (1 SPST NO, 2 A/250 V AC) and I/O digital (outputs)

KM-1 LCRRRD--

Art. no. 605744

KM 1 with 24 VAC (-25 ... +12 %) or 24 VDC (-15 ... +25 %), TC, Pt100, Pt1000, mA, mV, V + digital input 1 (input), relay (1 SPST NO, 2 A/250 VAC) and I/O digital (outputs)

KM-3 HCIR-D--

Art. no. 605745

KM 3 with 100 ... 240 V AC (power supply), TC, Pt100, Pt1000, mA, mV, V + digital input 1 (input), analog output (0/4 ... 20 mA, 0/2 ... 10 V), relay (1 SPST NO, 2 A/250 VAC) (outputs)

other design types upon request

SELF-SUPPLYING PLUG-IN DISPLAY FOR MEASURING TRANSDUCER WITHOUT AUXILIARY ENERGY SOURCE



GIA 0420-VO



GIA 0420-VO-T

HIGHLIGHTS:

- scale freely adjustable, on site' within seconds, no auxiliary devices required
- monitoring for probe damage, probe short circuit, values above/below permissible limit
- Software filters that can be activated/deactivated guarantee stable display even with a sensor signal prone to interference.
- Without auxiliary energy
- Special adapter can be turned to any position

GIA 0420-VO

Art. no. 601016

Plug-in display without buttons, 4 ... 20 mA

GIA 0420-VO-T

Art. no. 604152

Plug-in display without buttons, 4 ... 20 mA

Specifications:	
Input signal:	4 ... 20 mA (2-wire)
Voltage load:	approx. 2 V, (approx. 3.5 V at ...-EX)
Supply current:	from current loop
Accuracy:	±0.2 % FS ±1 digit (at nominal temperature = 25 °C)
Display:	10 mm high LCD
Display range:	-1999 ... +9999
Decimal point:	any position
Scale:	freely adjustable via 3 buttons (for „VO“: accessible after cover has been removed)
Measuring rate:	approx. 5 measurements / s
Filter:	adjustable
Limit:	3 limit functions selectable:
LI 0:	Values above/below range permissible
LI 1:	Values above/below range not permissible
LI 2:	When range is exceeded, the referring rail will be displayed
Switching outputs: (only devices with option S1 or S2)	
S1:	1 electrically isolated open collector outputs
S2:	2 electrically isolated open collector outputs, connection via separate M8 jack
Switching point, switching hysteresis:	freely adjustable
max. switching voltage:	28 V
max. switching current:	1 A (option S1: 20 mA)
Reaction time:	≤250 ms
Min./Max. value memory:	memorizing of max. and min. values.
Operation, Configuration:	via 3 keys
Working conditions:	-25 ... +50 °C / 0 ... 80 % RH (non-condensing)
Electric connection:	special-adapter design for cubic plug EN 175301-803/A for simple plug-in wherever required.
Protection rating:	IP65 (when mounted appropriately)
Housing:	ABS, keypad, transparent panel made of polycarbonate
Dimensions:	approx. 48.5 x 48.5 x 35.5 mm (W x H x D) without special adapter, approx. 90 x 50.5 x 39.5 mm (W x H x D) with special adapter
Scope of supply:	Device, 2 screws (68 and 75 mm), manual

Variant:

GIA0420-VO-0-00-S2-GE

Art. no. 608220

with 2 electrically isolated switching outputs
Delivery incl. 1 m connecting cable for connection of both switching outputs (Option S2 not in combination with EX-device available)

GIA 0420-VO-T-EX

Art. no. 601040

Plug-in display 4 ... 20 mA with EX-protection for all potentially explosive atmospheres

Ex qualification: Ex II 2G Ex ia/ib IIC/IIB T4

(Further information please refer to our homepage www.greisinger.de)

Variant:

GIA 0420-VO-T-EX-S1

Art. no. 608758

Device with 1 electrically isolated switching output
(Option S1 just in combination with EX-device available)



GIA 0420-WK-T

Art. no. 601653

Plug-in display with buttons, 4 ... 20 mA

GIA 0420-WK-T-EX

Art. no. 601877

Plug-in display with Ex-protection for all potentially explosive atmospheres, 4 ... 20 mA

Specifications:

as GIA ... VOT but	
Electric connection:	Connection to any standard signal source 4 ... 20 mA or 0 ... 10 V via 2 m connection cable.
Housing:	with mounting holes can be mounted to any surface





MIT LED-ANZEIGE

PLUG ON CONTROLLER/DISPLAY NEEDS NO AUXILIARY ENERGY

HIGHLIGHTS:

- fast controlling and supervision (reacting time <20 ms)
- min./max. value memory
- 3 limit functions, 3 filter stages
- alarm delay adjustable
- extensive self check and diagnosis system
- freely programmable

GRA 0420-VO

Art. no. 601022

Plug on controller/display without auxiliary energy, output 4 ... 20 mA, 1 electrically isolated switching output.

GRA 010-VO

Art. no. 601024

Plug on controller/display without auxiliary energy, output 0 ... 10 V, 1 +Ub-switching output.

Specifications:	GRA 0420 ...	GRA 010 ...
Input signal:	4 ... 20 mA (2-wire)	0 ... 10 Volt (3-wire)
Voltage load:	<5.5 V	--
Input resistance:	--	approx. 30 kOhm
Supply voltage:	--	12 ... 28 V DC
Supply current:	from current loop	<10 mA
Display:	approx. 7 mm high, 4 digit LED	
Display range:	-1999 ... 9999 digit, first and last value freely adjustable	
Recommended range:	≤2000 digit	
Decimal point:	any position	
Accuracy:	≤0.2 % FS ±1 digit (at nominal temperature = 25 °C)	
Measuring rate:	>50 measurements / s	
Filter:	selectable in 3 stages	
Limit:	3 limit functions selectable:	
LI 0:	Values above/below range permissible	
LI 1:	Values above/below range not permissible	
LI 2:	When range is exceeded, the refering rail will be displayed	
Switching outputs		
GRA0420VO:	1 electrically isolated open collector output, connection via cubic plug	
GRA010VO:	1 +Ub-switching open collector output, connection via cubic plug	
Switching point, switching hysteresis:	freely adjustable	
max. switching voltage:	28 V	
max. switching current:	20 mA (at option ... -S2: 1 A)	
Reaction time:	≤20 ms	
Switching functions:	2 or 3 point controller, 2 point controller with alarm, min-/max-alarm	
Operation:	via 3 keys	
Working temperature:	-25 ... +50 °C	
Relative humidity:	0 ... 80 % RH (non-condensing)	
Electric connection:	special-adaptor design for cubic plug EN 175301-803/A for simple plug-in wherever required. 2 screws (68 and 75 mm) included in scope of supply.	
Protection rating:	IP65 (when mounted appropriately)	
Housing:	ABS, keypad (resp. transparent panel made of polycarbonate)	
Dimensions:	approx. 48.5 x 48.5 x 35.5 mm (W x H x D) without special adapter, approx. 50.5 x 90 x 39.5 mm (W x H x D) with special adapter	
Scope of supply:	Device, 2 screws (68 and 75 mm), manual	

Variants:

GRA 0420-VO-S2

Art. no. 605920

Design type with 2 electrically isolated switching outputs. Outputs with increased switching current (28 V / 1 A), connection via separate M8 jack (Delivery incl. 1 m connecting cable for connection of both switching outputs)

GRA 0420-VO-OT

Art. no. 605532

design type without pushbuttons in the cover (device's adjustment is not accessible for users)

GRA 010-VO-S2

Art. no. 607650

Design type with 2 electrically isolated switching outputs. Outputs with increased switching current (28 V / 1 A), connection via separate M8 jack (Delivery incl. 1 m connecting cable for connection of both switching outputs)

GRA 010-VO-OT

Art. no. 607645

design type without pushbuttons in the cover (device's adjustment is not accessible for users)



GRA 0420-WK

Art. no. 604881

Without auxiliary energy, output 4 ... 20 mA, 1 electrically isolated switching output.

GRA 010-WK

Art. no. 604882

Output 0 ... 10 V, 1 electrically isolated switching output.

Specifications:

same as GRA ... VO, but

Electric connection:	connection to any standard signal source and switching output via 2 m connection cable.
Housing:	with mounting holes can be mounted to any surface whatever

HOUSINGS FOR SURFACE MOUNTING FOR BUILD IN OF DEVICES



APG-1*

Art. no. 602826

Housing for surface mounting incl. seal GGD2448



APG-2*

Art. no. 603178

Housing for surface mounting incl. seal GGD2448



APG-3*

Art. no. 603462

Housing for surface mounting incl. seal GGD2448

Dimensions:	82 x 80 x 95 mm (W x H x D), without elbow-plug	82 x 80 x 95 mm (W x H x D), without screw connections	82 x 80 x 95 mm (W x H x D), without screw connections
Panelcut-out:	for 1 display at the format 48 x 24 mm	for 1 display at the format 48 x 24 mm	for 2 displays at the format 48 x 24 mm
Connection:	elbow-plug according to EN 175301-803/A, 4-pin	2 x screw connections M12 x 1.5	2 x screw connections M12 x 1.5
Protection class:	IP65	IP65	IP65
Suitable for:	GIA 20 EB / GIR 230 ... / GIA 0420 / GIA 0420 SP / GIA 2448 /WE / GTH2448/1, 2, 3		



APG-4*

Art. no. 602827

Housing for surface mounting incl. seal GGD4896



APG-6*

Art. no. 603179

Housing for surface mounting incl. seal GGD4896



APG-7*

Art. no. 606825

Housing for surface mounting incl. seal GGD4896

Dimensions:	125 x 75 x 126 mm (W x H x D), without screw connections	125 x 175 x 126 mm (W x H x D), without screw connections	122 x 72 x 126 mm (W x H x D), without screw connections
Panelcut-out:	for 1 display at the format 96 x 48 mm	for 2 displays at the format 96 x 48 mm	for 1 display at the format 72 x 36 mm
Connection:	screw connections M12 x 1.5 and M16 x 1.5	screw connections 2 x M12 x 1.5 and 2 x M16 x 1.5	screw connections M12 x 1.5
Protection class:	IP65	IP65	IP65
Suitable for:	GIA 2000 / GIR 2000 PT / GIR 2002 ..., / GTH 83 EG, / GTH 1150 EG		GIR 300, GIR 360

* Note: All housings without installation device and without unit sticker! These (see page 124) have to be ordered separately!
The Installation device will be assembled for free in the housing (on common order) if desired.

SOLID STATE RELAYS



WP66D10

Art. no. 608519
Solid State Relays

WP66D25

Art. no. 608520
Solid State Relays

WP66D50

Art. no. 608521
Solid State Relays

WP66D75

Art. no. 608522
Solid State Relays

General:

The WP SSRs provide an economy option for users requiring devices to switch up to 75A.

- Panel mounting
- High thermal performance
- CE and UL / cUL
- RoSH compliant

Specifications:

Max. rated current:	10, 25, 50, 75 A
Control voltage:	48 ... 660 VAC
Load voltage:	4 ... 32 VDC
Scope of supply:	Device

ALARM LIGHT WITH BUZZER



GIVES OPTICAL AND
ACCOUSTIC ALARM

Application

ALARM 230V

Art. no. 600913

Alarm light with buzzer

General:

Universal alarm device with flashlight and buzzer, which is connected easily to relay outputs and the 230 V grid.

Specifications:

Color:	red
Sound level:	92 dB
Voltage supply:	230 V AC / 50 Hz
Working temperature:	-20 ... +50 °C
Protection class:	IP 65
Suitable for:	e. g. GIR 2002, GIR 230, GIR 300

POWER SUPPLY



GNG 220



GNG 12/300



DPP 15

GNG 220 / 2

Art. no. 600282

GNG 220 / 2 - 12 V

Art. no. 600305

GNG 220

Art. no. 603813

Power supply integrated in snap-on housing for top hat rail - for 2 transmitters

Specifications:	
Input voltage:	230 V, 50/60 Hz
Output voltage:	GNG 220 / 2: 2 x 18 V DC $\pm 5\%$, 25 mA each GNG 220 / 2 - 12 V: 2 x 12 V DC, 30 mA each GNG 220: 1 x 12 V DC, 100 mA, unregulated
Dimensions:	48 x 96 x 52 mm (W x H x D)
Mounting:	snap-on to top hat rail

GNG 12 / 300

Art. no. 600274

GNG 24 / 150

Art. no. 600275

Power supply integrated in snap-on housing for top hat rail

Specifications:	
Input voltage:	230 V, 50/60 Hz
Output voltage:	GNG12/300: 12 V DC $\pm 5\%$, 300 mA GNG24/150: 24 V DC $\pm 5\%$, 150 mA andere Spannungen auf Anfrage
Dimensions:	70,4 x 96 x 62 mm (W x H x D)
Mounting:	snap-on to top hat rail

DPP 15

Art. no. 607282

DC power supply unit

Specifications:	
Input voltage:	85 ... 264 V AC, 50 ... 60 Hz or 90 ... 375 V DC
Output voltage:	22.5 ... 28.5 V DC, adjustable by trimmer
max. output current:	0.6 A
Dimensions:	22.8 x 75 x 102 mm (W x H x D)
Mounting:	snap-on to top hat rail

DC/DC-CONVERTER



GNG 12 / 24

Art. no. 600276

GNG 24 / 24

Art. no. 600277

DC/DC-converter to electrically isolate 12 V or 24 V DC-supply voltages

Specifications:	
Input voltage:	GNG12/24: 10 ... 18 V DC GNG24/24: 19 ... 30 V DC
Output voltage:	24 V DC $\pm 5\%$, max. 80 mA, electrically isolated
Insulating voltage:	500 V
Operating temperature:	-20 ... +70 °C
Mounting:	snap on to top hat rail
Dimensions:	minimum space requirements due to narrow rack housing (module fully encapsulated). Installation width only 22.5 mm.

GNG 12 / 2 x 12

Art. no. 607942

GNG 24 / 2 x 24

Art. no. 605492

DC/DC-converter

Specifications:	
Input voltage:	GNG 12 / 2 x 12: 10 ... 18 V DC GNG 24 / 2 x 24: 19 ... 30 V DC
Output voltage:	2 x 24 V DC $\pm 5\%$, max. 80 mA each, electrically isolated

other data identical to GNG12/24 resp. GNG24/24

POWER SUPPLY AND RELAY MODULE (E.G. FOR GIA 20 EB)



GNR10

Art. no. 603680

Power supply and relay module for top-hat rail, power supply for one GIA 20 EB and one transducer.

Specifications:	
Input voltage:	230 V, 50/60 Hz (others upon request)
Output voltage:	approx. 11 V DC (unregulated) for the supply of a GIA 20 EB 18 V DC $\pm 5\%$ (regulated), 25 mA for measuring transducer
Relay outputs:	2 volt-free changeover contacts, switching current: max. 10 A ohmic load.
Connection:	screw-type terminal
Dimensions:	48 x 96 x 60 mm (W x H x D)
Mounting:	snap on to top hat rail

GR10

Art. no. 607943

Relay module for top-hat rail for one GIA 20 EB to mounting to a top-hat rail

Specifications:	
Input voltage:	12 V DC (others e.g. 24 VDC upon request)
Relay outputs:	2 volt-free changeover contacts, switching current max. 10 A ohmic load.
Connection:	screw-type terminal
Dimensions:	48 x 96 x 60 mm (W x H x D)
Mounting:	snap on to top hat rail

MULTIFUNCTION CONTROLLER GHM-ONE – SMART SOLUTIONS FOR AUTOMATION



NEW!



TIME-SAVING CREATION OF APPLICATIONS WITH HIGH FUNCTIONAL RELIABILITY

THE USER CAN CREATE THEIR OWN APPLICATION WITHOUT LONG LEARNING CURVES WITH THE GHM-CAT.

ALL CONFIGURATIONS FOR THE GHM-ONE ARE MADE WITH A SINGLE TOOL. ELIMINATE THE TIME-CONSUMING LEARNING CURVE FOR DIFFERENT SOFTWARE PACKAGES FOR CONTROLLERS, RECORDERS, DATA LOGGERS, MINI-SCADA AND MINI-PLC.

INTRODUCTORY PACKAGE FOR A SPECIAL PRICE

HIGHLIGHTS:

- DIN format 96 mm x 96 mm
- Visualisation system with 3.5" TFT display
- Control unit with 4 function keys and touch display
- Modular I/O concept
- Universal PID control function
- Multi-channel control system
- Comfortable programmer function
- Process control with more than 100 functions
- Process calculation with mathematical library
- Screen recorder function and data logger function
- Communication with field bus and Ethernet networks
- Multilingualism

FURTHER INFORMATION AND FREE CONFIGURATION SOFTWARE WITH EXAMPLE PROJECTS UNDER:

WWW.GHM-ONE.COM

Demo case GHM-ONE MSR9696H

Art. no. 190037

Multifunction controller

General:

The GHM ONE is a multifunction unit that can be specifically adapted to process and control requirements with the GHM CAT configuration software. Therefore, the system becomes an ideal control, regulating, and operating unit.

Application:

The GHM ONE gives the user the possibility of effectively implementing their ideas in the areas of automation and visualisation without the need for programming skills. The platform is an ideal basis for a wide range of applications, including:

- Industrial furnaces
- Laboratory ovens
- Heat treatment systems
- Microbreweries
- Dryers
- Test stands
- Building automation
- Climate control
- Pasteurisation systems
- Production plants

The GHM-ONE is based on a powerful processor which, in combination with a relay card and mains adapter card, serves as the base unit. The base unit can be adapted to applications with a communications card and up to 2 I/O cards. The number of physical inputs and outputs can be expanded with external I/O's. This modular layout enables specific adaptation of the hardware to the automation task. The creation of the application itself takes place in the MSR 9696H with the 'Configuration and Application Tool' CAT. The software assists the user with more than 100 complete function blocks and intuitive operation for the implementation of their ideas.

Specifications:

Controls / device front

- Keys:** 4 freely assigned keys
- Touch function:** Resistive touch display

Display

- Front LEDs:** 1 red freely assigned LED
1 green freely assigned LED
- Display:** 3.5" TFT display, 320 x 240 pixel QVGA resolution

Data logger

- Storage medium:** eMMC chip
- Storage capacity:** approx. 1 GB
- Storage rate:** >= 1 second

Auxiliary energy

- Supply voltage:** 100 ... 240 V AC or 24 V DC
- Power consumption:** Typically 10 W

Electrical connection: Spring-type terminal, 3-pin

Conductor cross-section: 0.25 ... 2.5mm

Galvanic isolation: I/O level / auxiliary energy / processor

Environmental conditions

Operating temperature: 0 ... 55 °C


Protection rating: IP65 front side
IP20 lens tube and rear side

Housing: Device for control panel installation


Dimensions: 98 x 98 x 115 mm (W x H x D) (without plug)
98 x 98 x 130 mm (W x H x D) (with plug)

Weight: 450 g (device)



MULTIFUNCTION CONTROLLER GHM-ONE

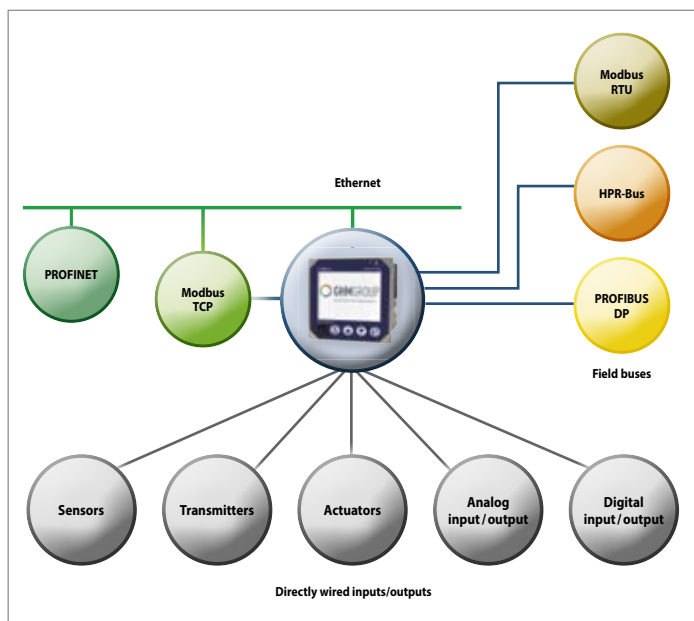

GHM-CAT INPUT



GHM-ONE OUTPUT



KOMPLETTPAKET IM MUSTERKOFFER

The complete package includes:

• BASIC DEVICE

Consisting of:

a universal input/output card (expandable)

with:

- 2 x universal inputs
 - TC: Type: L, J, K, N, S, R, T, E, B, W
 - RTD: Pt100/1000, Ni100/1000, resistance: 0 ... 20 kOhm
 - Voltage: -1000 ... +1000 mV
 - Current: 0 ... 20 mA
- 2 x analogue inputs
 - Voltage: 0 ... +10 V
 - Current: 0 ... 20 mA
- 2 x analogue outputs 0 ... +10 V / 0 ... +20 mA
- 6 dig. inputs/outputs (incl. 2 counting inputs up to 10kHz)

Galvanic isolation

grouped, among analogue inputs, compared with analogue outputs and digital inputs/outputs

Communication cart

- 2 x Ethernet RJ45 10/100Mbit/s
 - IP via DHCP or fixed
 - Modbus TCP Slave/Master, FTP server
- 2 x RS485
 - Modbus Master/Slave

Relay card

with 4 changeover contacts
Switching voltage: 250 V AC <4A

- GHM-CAT APPLICATION SOFTWARE (ON USB STICK)
- OPERATING MANUAL
- 1X USB DONGLE AND LICENSE
- EXAMPLE APPLICATIONS (ON USB STICK)
- USB CONNECTION CABLE
- CONNECTION CABLE FOR 100-240 VAC MAINS SUPPLY

THE KEY FUNCTIONS OF THE GHM-CAT ENGINEERING TOOL

- Creation of the application from finished functions found in various libraries
- Graphic linking of functions in the function plan editor
- Automatic alignment of connections
- Parameterisation of functions
- Creation of operating structure and visualisation (HMI)
- Creation of test menus for parameterisation on the GHM ONE
- Creation of programs for the program controller
- Simulation of the overall application on the PC, including simulation of control paths
- Online device function with debugging functions for application testing
- Transfer of applications to the GHM ONE
- Firmware update function
- Online help for all functions

CREATE INTUITIVELY WITH GHM-CAT:

- Operating and monitoring concepts
- Process controls
- Regulation structures
- Process calculations
- Data logger concepts
- Applications in multiple languages



GHM-ONE – THE SOLUTION FOR YOUR AUTOMATION TASK
WWW.GHM-ONE.COM

LOGGER / BUS SYSTEMS

DATA LOGGER T-LOGG (NOT BUS-CAPABLE)

DATA LOGGER E.A.S.Y.BUS

APPLICATION:

Temperature

Humidity

Air pressure (abs.)

Standard signal

Pulse

State

Interface

EASYBus-load

T-Logg 100 ..

T-Logg 120 ..

T-Logg 160

EASYLog 80K

EASYLog 80CL..

EASYLog 40 NS

EASYLog 40 IMP

EASYLog 40 BIN

•

•

•

•

•

•

•

USB 100

EASYBus

EASYBus

EASYBus

EASYBus

EASYBus

2

2

2

2

2

DEVICE INFORMATION:

Catalogue page

Page 140

Page 141

Page 141

Page 142

Page 143

Page 143

Page 144

Page 144

SENSOR MODULS E.A.S.Y.BUS

APPLICATION:

Temperature

Humidity

Standard signal

CO

CO₂

EASYBus-load

EBT

EBHT

EBT-2R

EBHT-2R

EBT-IF

EBN

EBG-CO₂

•

•

•

•

•

•

•

•

•

•

•

1.5

1.5

1.5

1.5

1.5

2

1

DEVICE INFORMATION:

Catalogue page

Page 146

Page 147


Page 148

Page 148

Page 149

Page 149

Page 150

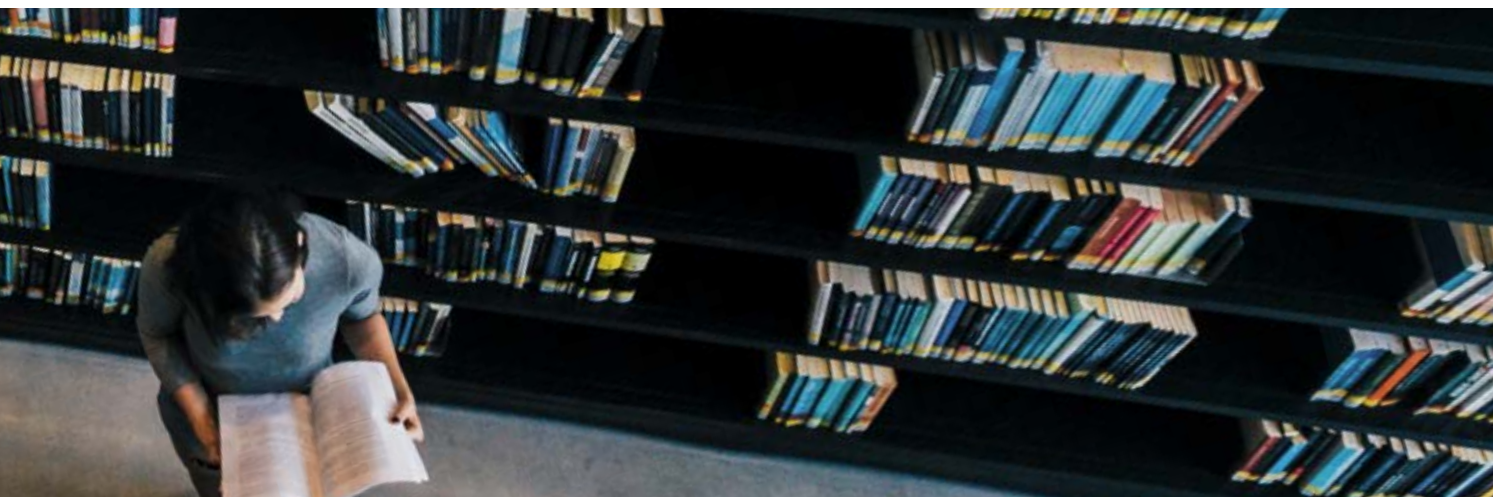

WIRELESS
DATA
LOGGER

	HD35ED-L-N/3-TC-E	HD35ED-...-N-TV-E	HD35ED-...-1N-TVI-E	HD35ED-L-1N-TV-E	HD35ED-G-148N-TVI-E	HD35ED-...-148NAB-E	HD35-ED-...-1NB-E	HD35ED-G-H-E	HD35ED-W-H-E	HD35ED-W-N-TV-E	HD35ED-W-1N-TVI-E
APPLICATION:											
Temperature	3x NTC Input	•	•	•	•	•	•			•	•
Humidity			•	•	•	•	•				•
Air pressure (abs.)					•	•					
CO						•					
CO ₂						•	•				
Universal input								3x	4x		
Waterproof									•	•	•

DEVICE INFORMATION:

Catalogue page	Page 157	Page 158	Page 163	Page 159	Page 159	Page 160	Page 161	Page 162	Page 162	Page 162	Page 163
----------------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------

BASE UNITS,
REPEATER

	HD35-RE-E	HD35-AP-D-E	HD35-AP-W-E	HD35-AP-G-E	HD35-ED-ALM-E
APPLICATION:					
Description	Repeater	USB-Dongle	Access Point	Access Point	Alarm module
Range (868 MHz radio)	300 m (180 m to HD35-AP-D-E)	180 m	300 m	300 m	300 m
USB		•	•	•	
LAN / WiFi			•		
GSM (mobile radio)				•	
Relay outputs					2
DEVICE INFORMATION:					
Catalogue page	Page 156	Page 156	Page 157	Page 157	Page 150



T-Logg data logger (for standalone applications)



- Data logger for temperature, humidity, standard signals
- 16 000 measurements



Data logger for standalone applications (e.g. directly on the goods during refrigerated transport)
The free MINISoft software (download from www.greisinger.de) and a USB 100 connecting cable (not included in the scope of delivery) are required for configuration and readings.
T-Logg is not compatible with EASYBus, is not bus-capable and is not designed for permanent communication with the software.



T-LOGG

THE LOGGER SERIES FOR
STAND-ALONE APPLICATIONS

General specifications:

Display:	LCD-display, 10 mm high
Recording interval:	1 s ... 5 h (T-Logg 160 4 s ... 5 h)
Storage capacity:	16 000 measuring values
Recording time	166 Tage (if interval is 15 min.)
Nominal temperature:	25 °C
Working temperature:	-30 ... +60 °C (T-Logg 100... only, otherwise -25 ... +60 °C)
Storage temperature:	-40 ... +70 °C (T-Logg 100... only, otherwise -30 ... +70 °C)
Battery:	CR2032, exchangeable
Battery service life:	over 3 years (if recording interval is 15 min.)
Approvals:	DIN EN 12830
Interface:	3-pole M8 plug for USB 100
Housing:	Housing made of shock resistant plastic, transparent front made of polycarbonate. splash water-proof: IP 65.
Dimensions:	48.5 x 48.5 x 35.5 mm (W x H x D); Housing without mounting lugs, plug, sensor connection and/or sensor tube

Accessories and spare parts:

USB 100

Art. no. 602051

Interface converter, for direct connection to a PC.



GWH 40K

Art. no. 601166

Wall suspension with lock against theft (picture: see page 152)

GWH 10

Art. no. 601169

Simple wall suspension, made of stainless steel (picture: see page 152)

Ersatz-CR2032

Art. no. 606080

Spare battery for T-loggs



ISO-WPF4

Art. no. 602543

Certificate of calibration incl. standard-measuring values (approx. 20 % / 40 % / 60 % / 80 % RH increasing and decreasing; measurement point Temperature: approx. +23 °C)

ISO-WPT3

Art. no. 602596

Certificate of calibration: -20 °C / 0 °C / +70 °C

Note: The T-Logg 100 is neither BUS- nor EASYBus compatible.

TEMPERATURE DATA LOGGER



DIN EN 12830

T-Logg 100

Art. no. 600563

Temperature data logger (16 000 measurement values) for any application

Specifications:

Measuring ranges:	-30.0 ... +60.0 °C (Resolution: 0.1 °C)
Accuracy: (at 25 °C)	±0.5 °C
Sensor:	NTC 10 K
Sensor connection:	integrated in device
Scope of supply:	Device, battery, manual

T-Logg 100-SET

Art. no. 602153

Complete set: T-Logg 100 + USB 100 (incl. software)

T-Logg 100-E

Art. no. 600565

Temperature data logger (16.000 measurement values) for any application

Specifications:

Measuring ranges:	-30.0 ... +120.0 °C (Resolution: 0.1 °C)
Accuracy: (at 25 °C)	±0.2 % of measuring value ±0.5 °C
Sensor:	NTC 10 K in VA sensor tube, Ø 5 mm, approx. 50 mm long
Sensor connection:	approx. 1 m silicone cable, with anti-buckling glanding to housing
Scope of supply:	Device, battery, manual

T-LOGG

THE LOGGER SERIES FOR
STAND-ALONE APPLICATIONS

Note: For configuration or reading out a interface converter USB 100 is needed!

HUMIDITY- / TEMPERATURE-LOGGER



T-Logg 160

Art. no. 600887

Humidity- / Temperature- Data-Logger (16 000 meas. values) for any application

Specifications:	
Measuring ranges:	0.0 ... 100.0 % RH (resolution: 0.1 % RH) -25.0 ... +60.0 °C (resolution: 0.1 °C)
Accuracy (at 25 °C):	±3 % in range 10 ... 90 % ±0.3 °C ±0.017 * (T - 25 °C)
Sensors:	capacitive humidity sensor Silicon temperature sensor in sensor tube with Ø 15 mm and removable plastic protective cap
Sensor connection:	installed directly in the housing
Display:	10 mm high LCD-display
Scope of supply:	Device, battery, manual, free software for download: www.greisinger.de

T-Logg 160 SET

Art. no. 602273

Complete set with T-Logg 160, interface converter USB 100, incl. software

STANDARD SIGNAL DATA LOGGER



T-Logg 120-W-...

Standard signal data logger (16.000 measuring values) for transducers etc.

Specifications:	
Display range:	-1999 ... 9999 digit, freely programmable
Decimal point:	any position
Measuring ranges:	depending on variant
Accuracy (at 25 °C):	±0.5 % FS (at nominal temperature)
Sensor:	16 bit analogue digital converter
Electric connection:	elbow-plug in accordance with EN 175301-803/A for connection to an existing transmitter.
Scope of supply:	Device, battery, manual

T-Logg 120-K-...

Specifications:	
Measuring ranges:	depending on variant
Accuracy (at 25 °C):	±0.5 % FS (at nominal temperature)
Sensor:	16 bit analogue digital converter
Electric connection:	Silicone cable, approx. 0.5 m long (with anti-kink protection, not removable)
Scope of supply:	Device, battery, manual

T-LOGG120 - 1 - 2

Greisinger		
1.	Model	
	W	Angle plug
	K	Cable connection
2.	Input signal	
	-E1	4-20 mA
	-E2	0-10 V
	-E3	0-20 mA
	-E4	0-1 V
	-E5	0-2 V

T-LOGG


THE LOGGER SERIES FOR
STAND-ALONE APPLICATIONS

T-LOGG

THE LOGGER SERIES FOR
STAND-ALONE APPLICATIONS

Note: For configuration or reading out a interface converter USB 100 is needed!

TEMPERATURE LOGGER FOR WATCHING PRODUCTION AND SERVER-ROOMS



E.A.S.Y.Bus - Modul
DIN EN 12830



EASYLOG-80K



EASYLOG-80KH

HIGHLIGHTS:
○ as well as cooling chambers according assignment of frozen food 92/1/EWG

EASYLOG 80K

Art. no. 611601
Temperature data logger, sensor tube are attached on the device

Specifications:	
Measuring ranges:	-30.0 ... +60.0 °C (Resolution: 0.1 °C)
Accuracy (25 °C):	±0.5 °C
Working temperature:	-30 ... +60 °C
Sensor:	Pt1000 (2-wire), DIN cl. AA, in sensor tube made of plastic, Ø 7 mm, approx. 30 mm long, at certificate: stainless steel tube, Ø 5 mm, approx. 60 mm long)
Sensor connection:	Installed directly in the housing

EASYLOG 80KH

Art. no. 611602
Temperature data logger, sensor tube are connected via 1 m cable

Specifications:	
Measuring ranges:	-50.0 ... +150.0 °C (Resolution: 0.1 °C)
Accuracy (25 °C):	±0.5 °C ±0.2 % of m.w.
Working temperature:	-25 ... +60 °C
Sensor:	Pt1000 (2-wire), DIN cl. AA, sensor tube made of stainless steel, Ø 5 mm, approx. 50 mm long
Sensor connection:	Silicone cable, approx. 1 m long (with anti-kink protection, not removable)

Specifications:	
Display:	two 4½-digit LCD-displays
Recording interval:	4 s ... 5 h, free programmable via software GSOFT 40K
Storage capacity:	250.000 data sets in max. 64 recording sequences
Recording time:	7 years (if recording interval is 15 min.)
Battery service life:	approx. 5 Jahre (if recording interval is 15 min.)
Storage temperature:	-30 ... +70 °C
Interface:	EASYBus-interface, 3-pin mini-integral plug
Housing:	ABS housing, clear polycarbonate pane. Splash-proof IP65 (excl. protection cap)
Dimensions:	48.5 x 48.5 x 35.5 mm (L x W x D) sensor and plug not included
Scope of supply:	Device, manual

Accessories and spare parts:	
ISO-WPT3 Art. no. 602596 Certificate of calibration, measuring points: -20 °C / 0 °C / +70 °C (at ...40KH)	
ISO-WPT3L Art. no. 603530 Certificate of calibration, measuring points: -20 °C / 0 °C / +60 °C (at ... 40K)	


EASYLOG - 1 - 2 - 3 - 4 - 5 - 6

Greisinger		
1.	Design type	
	80K	80K
	80KH	80KH
3.	Option	
	-ALARM	Additional Alarm output according to PI
4.	Option	
	-AFK	Detachable sensor cable acc. PI
	-AFK-GL	Detachable sensor cable acc. PI, without sensor
5.	Option	
	-SMB	Special measuring range selectable between -200 .. +600 °C
6.	Option	
	-WD	Water proof sensor
Various cable types and lengths upon request		

Other probes see page 208-210

Attention: Our software GSOFT40K as well as a level converter (EBW1, EBW3 or EBW64) and connection cable (ESBK 01) are required for all EASYLOG devices for configuration and to read-out logger data. (p.r.t. pages 109 and 151 / 152).

HUMIDITY-/TEMPERATURE-/AIR PRESSURE LOGGER

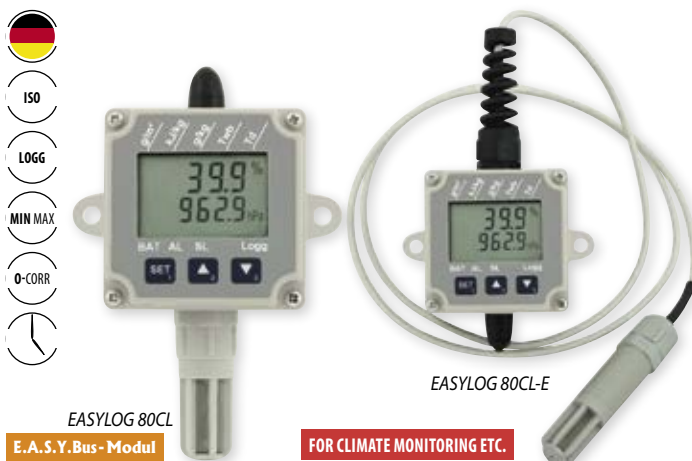

EASYLOG 80CL

Art. no. 602773

Humidity-/Temperature-/Air pressure data logger (each 250 000 measured values) for climatic applications.

EASYLOG 80CL-E

Art. no. 606630

Humidity-/Temperature-/Air pressure data logger (each 250 000 measured values) for climatic applications., with external sensor

Specifications:

	Measuring / display range:	Accuracy (at 25 °C):
Humidity:	0.0 ... 100.0 % RH	±2 % in range 10 ... 90 %
Temperature:	-25.0 ... +60.0 °C	±0.3 °C ± 0.017 * (T -25 °C)
Air pressure:	300.0 ... 1100.0 hPa	±1.0 hPa
Additional available display ranges:		
Wet bulb temperature:	-27.0 ... +60.0 °C	
Dewpoint temperature:	-40.0 ... +60.0 °C	
Enthalpy:	-25.0 ... +999.9 kJ/kg	
Atmospheric humidity:	-0.0 ... +640.0 g/kg	
Absolute humidity:	0.0 ... 200.0 g/cm ³	
Resolution display and memory:	0.1 °C, 0.1 % RH and 0.1 hPa or 1 digit	
Sensors		
Humidity/Temperature:	sensor mounted in sensor tube (sensor is exchangeable), 1 m cable	
Air pressure:	sensor integrated in housing	
Sensor tube:	approx. Ø 15 mm made of polyamide	
Protection cap:	screw-type plastic protection cap for quick responses	
Display:	two 4½-digit LCD-displays	
Recording interval:	4 s ... 5 h, free programmable via buttons on the device or via the software GSOF 40K	
Storage capacity:	250.000 data sets (humidity, temperature, air pressure) in max. 64 recording sequences	
Recording time:	7 years (at 15 min. interval)	
Battery service life:	approx. 5 years (at 15 min. interval)	
Working temperature:	-25 ... +60 °C	
Storage temperature:	-30 ... +70 °C	
Interface:	EASYBus-interface 3-pin mini-integral plug	
Housing:	Housing made of shock resistant plastic, transparent front made of polycarbonate, splash water-proof: IP65 (excl. protection cap)	
Dimensions:	48.5 x 48.5 x 35.5 mm (L x W x H) sensor and plug not included.	
Scope of supply:	Device, manual	

Variant:

EASYLOG 80CL-ALARM

Art. no. 603336

Humidity-/Temperature-/Air pressure data logger additional alarm-output, open-collector output via 4-pole miniature mounting connector (IP65) including 1 m cable. Max. switching power: 28 V, 50 mA

Accessories and spare parts:

ISO-80CL

Art. no. 607734

Certificate of calibration humidity (measured points about 20/40/60/80% at 23 °C) Pressure 5 points increase, 5 points decrease over the entire measuring range

STANDARD SIGNAL LOGGER



EASYLOG 40NS-W

REPLACES FOR
EXPENSIVE RECORDERS

E.A.S.Y.Bus - Modul

EASYLOG 40NS-W-...

Standard Signal Data Logger (48.000 meas. values) for transducers etc. (with elbow type plug)

EASYLOG 40NS-K-...

Standard Signal Data Logger (48.000 meas. values) for transducers etc. (with PG glanding and cable)

Specifications:

Display range:	-1999 ... 9999 digit free programmable
Decimal point:	any position
Eingangssignale:	one signal only! 0 ... 2 V, 0 ... 10 V, 0 ... 20 mA or 4 ... 20 mA, other input signals upon request (input is not isolated for EASYBus)
Accuracy:	±0.5 % (at nominal temperature)
Display:	10 mm high LCD-display
Recording interval:	2 s ... 5 h, free programmable via software GSOF 40K
Storage capacity:	48.000 measuring values
Recording time:	500 days (if recording interval is 15 min)
Battery service life:	approx. 6 years (if recording interval is 15 min)
Working temperature:	-25 ... +60 °C
Storage temperature:	-30 ... +70 °C
Interface:	EASYBus-interface 3-pin mini-integral plug
Electric connection: (for input signals)	
... 40NS-W:	elbow-plug in accordance with EN 175301-803/A for connection to an existing transmitter.
... 40NS-K:	approx. 0.5 m connection cable
Housing:	Gehäuse aus ABS, Klarsichtscheibe aus Polycarbonat. Spritzwasserdicht IP65
Dimensions:	48.5 x 48.5 x 35.5 mm (W x L x D), with elbow-plug: 50.5 x 90 x 39.5 mm
Scope of supply:	Device, manual

EASYLOG40NS - 1 - 2 - 3 - 4

Greisinger		
1.	Design type	
	K	Cable connection
	W	Angle plug
2.	Input signal	
	-E1	4-20 mA
	-E2	0-10 V
	-E3	0-20 mA
	-E4	0-1 V
3.	Option	
	-DBK	Double battery capacity
4.	Option	
	-ALARM	Additional Alarm output

PULSE-LOGGER



FOR CONSUMPTION AND
FLOW RATE MEASURING PIECE
COUNTING ETC.

E.A.S.Y.Bus-Modul

EASYLOG 40IMP-S

Art. no. 600553
Pulse Data Logger (48000 measuring values) for individual use
(type switching contact - with PG-glanding and cable)

EASYLOG 40IMP-T

Art. no. 600555
Pulse Data Logger (48000 measuring values) for individual use
(type TTL-signal - with PG-glanding and cable)

Specifications:	
Measuring ranges:	0 ... 30000 pulses/cycle
Resolution:	1 pulse
Cycle:	2 s ... 5 h, free programmable via software GSOFT 40K
Display range:	-1999 ... 9999 digit free programmable
Decimal point:	any position
Input signals: (input is not isolated for EASYBus)	
EASYLog 40IMP/S:	passive volt-free switching contact
EASYLog 40IMP/T:	active TTL-signal
Resolution display and memory:	1 digit
Accuracy:	cycle time ±50 ms
Display:	10 mm high LCD-display
Recording interval:	equal to cycle
Storage capacity:	48.000 measuring values
Recording time:	500 days (if recording interval is 15 min.)
Battery service life:	approx. 6 years (without switching current, at 15 min)
Working temperature:	-25 ... +60 °C
Storage temperature:	-30 ... +70 °C
Interface:	EASYBus-interface, 3-pin mini-integral plug
Electric connection:	(for input signals) approx. 0.5 m connection cable, flying leads
Housing:	ABS housing, clear polycarbonate pane. Impermeable to splash water IP65
Dimensions:	48.5 x 48.5 x 35.5 mm (L x W x H) without connecting cable and plug
Scope of supply:	Device, manual

EASYLOG40IMP - 1 - 2 - 3

Greisinger		
1.	Design type	
	S	Switching contact - with PG screw fitting & cable
	T	TTL signal - with PG screw fitting & cable
2.	Option	
	-DBK	Double battery capacity
3.	Option	
	-ALARM	Additional Alarm output

STATE-LOGGER



FOR STATE
MONITORING ETC.

E.A.S.Y.Bus-Modul

EASYLOG 40BIN

Art. no. 602975
State Data-Logger (48000 measuring values) for individual use

Specifications:	
Input signal:	passive volt-free switching contact (input is not isolated for EASYBus)
Measuring values:	1 = contact is closed (R <50 Ohm) 0 = contact is open (R >20 kOhm)
Cycle:	2 s ... 5 h, free programmable via software GSOFT 40K
Resolution display and memory:	1 digit
Display:	10 mm high LCD-display
Recording interval:	equal to cycle
Storage capacity:	48.000 measuring values
Recording time:	500 days (if recording interval is 15 min.)
Battery service life:	approx. 6 years (without switching current, if recording interval is 15 min.)
Working temperature:	-25 ... +60 °C
Storage temperature:	-30 ... +70 °C
Interface:	EASYBus-interface 3-pin mini-integral plug
Electric connection:	(for input signals) approx. 0.5 m connection cable, flying leads
Housing:	ABS housing, clear polycarbonate pane. Impermeable to splash water IP65
Dimensions:	48.5 x 48.5 x 35.5 mm (L x W x H) without connecting cable and plug
Scope of supply:	Device, manual

EASYLOG40BIN - 1 - 2

Greisinger		
1.	Option	
	DBK	Double battery capacity
2.	Option	
	ALARM	Additional Alarm output

Attention: Our software GSOFT40K as well as a level converter (EBW1, EBW3 or EBW64) and connection cable (ESBK 01) are required for all EASYLOG devices for configuration and to read-out logger data. (p.r.t. pages 109 and 151 / 152)

E.A.S.Y.BUS® SYSTEM

PRINCIPLE OVERVIEW

Characteristics of the EASYBus system

- Low-cost wiring by using a twisted 2-pin connection line in either bus or tree design (polarity-free); can be used in any combination
- Bus line for simultaneous power supply and signal transmission
- Bus length up to 1000 m, extensible by using a repeater
- Fully automatic start-up installation via software
- Sensor modules can be changed, removed or added during operation at any time
- Connection of up to 250 sensor modules
- Optimum transmission reliability by means of CRC check
- Bus system is able to process data up to 20 measuring values per second
- Response time inside the EASYBus-system approx. 1 s; but approx. 20 ms by using a local controlling system



Temperature monitoring and regulation:
Cooling chambers
Laboratory & utility rooms
Storage rooms



Relative humidity / dew point / temperature monitoring:
Storage rooms, Heating systems / air condition, Museums / exhibition rooms / Libraries, Laboratories / utility rooms




Relative humidity / atmospheric pressure, CO₂ monitoring:
Manufacturing rooms / storage rooms, Office rooms (to condition the air of the room), Greenhouses



CO monitoring:
Underground garages / Parking garages, Motorcar garage / car repair Indoor go-kart tracks


Further information you find in our brochure
,Measurement data acquisition systems'
and on www.greisinger.de.

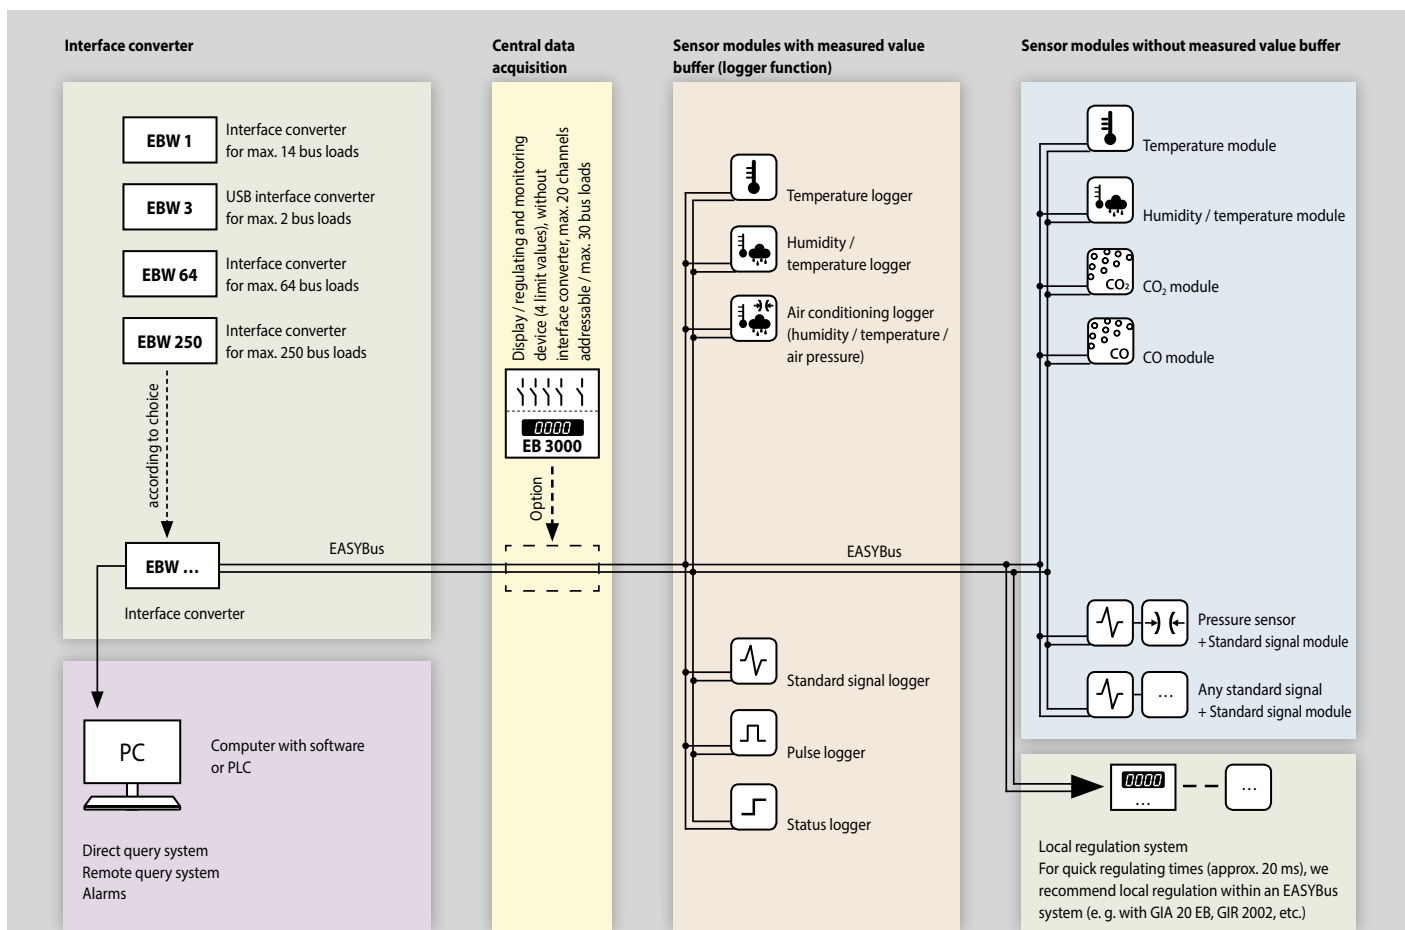


EASYBUS - SENSORMODULE FÜR TEMPERATUR




EBT - AP1
Wasserdicht
IP 65




Standard:
G = 1/2"
FL = 100 mm
D = 6 mm




Standard:
G = 1/2"
HL = 50 mm
FL = 100 mm
D = 6 mm



Standard:
FL = 50 mm
D = 3 mm



Standard:
FL = 100 mm
D = 6 mm



EBT-AP1

EASYBus - sensor modules for temperature (measuring range: -50.0 ... +150.0 °C)

EBT-AP2

EASYBus - sensor modules for temperature (measuring range: -50.0 ... +400.0 °C)

EBT-AP3

EASYBus - sensor modules for temperature (measuring range: -50.0 ... +150.0 °C)

EBT-AP4

EASYBus - sensor modules for temperature (measuring range: -50.0 ... +150.0 °C)

EBT-AP5

EASYBus - sensor modules for temperature (measuring range: -199.9 ... +650.0 °C)

EBT-SHUT

EASYBus - sensor modules for temperature incl. heat absorption hat
(measuring range: -25.0 ... +80.0 °C)

Design types:

EBT-AP1:	With threaded pin „G“ for direct screw connection.
EBT-AP2:	For higher temperatures, threaded pin „G“ at a distance from housing. HL = collar tube length.
EBT-AP3:	Indoor or outdoor probe for direct wall mounting (encapsulation of electronics required for outdoor use).
EBT-AP4:	Duct-type probe with probe tube arranged centrally and pointing downwards.
EBT-AP5:	Transducer for existing Pt1000 sensors or for applications where probe and housing need to be separated (e.g. extremely high ambient temperature or due to design reasons).
EBT-SHUT	without illustration; see next page
Other design types upon request - please do not hesitate to contact us!	

Specifications:

Measuring ranges:

AP1, AP3, AP4:	-50.0 ... +150.0 °C or -58.0 ... +302.0 °F
AP2:	-50.0 ... +400.0 °C or -58.0 ... +752.0 °F
AP5:	-199.9 ... +650.0 °C or -199.9 ... +999.9 °F
SHUT:	-25.0 ... +80.0 °C or -13.0 ... +176.0 °F

Sensor element:	Resistance thermometer Pt1000 acc. to DIN IEC 751
Resolution:	0.1 °C / 0.1 °F
Accuracy (electronic):	(at nominal temperature = 25 °C) ±0.2 % of meas. value ±0.2 °C
Sensor-Accuracy:	(Pt1000)
Standard:	acc. to DIN cl. B (±0.3 °C at 0 °C)
Option:	DIN cl. AA: ±0.1 °C at 0 °C
Electric connection:	elbow-type plug EN 175301-803/A (IP65), output 2-wire connection, max. 1.5 mm² each, no polarity
Sensor connection:	2-wire connection available (e.g. EBT - AP5)
Ambient temperature (electronic):	-25 ... +70 °C
Mounting position:	any
Fixing:	by means of screw-thread or fixing holes in the housing (accessible after top cover has been removed).
Mounting distance:	50 x 70 mm

Fixing screws:	max. shaft Ø: 4 mm
Sensor mounting:	sensors are electrically insulated as a standard.
Thread sizes G:	1/2" (standard) material V4A
Housing:	Material: ABS, protection class: IP65
Dimensions:	82 x 80 x 55 (L x B x H)
Scope of supply:	Device, manual

EBT - 1 - 2 - 3 - 4 - 5 - 6 - 7 - 8

Greisinger		
1.	Design type	
	AP1	With thread, without neck tube
	AP2	With thread, with neck tube
	AP3	Indoor and outdoor sensor
	AP4	Duct sensor
	AP5	For external sensor connection
	SHUT	Heat protective hat
	AP	loose board
2.	Fitting length EL	
	-050	50 mm, Standard at AP3
	-100	100 mm, Standard at AP1, AP2, AP4
		Jede weitere 100 mm
3.	Neck tube length	
	-050	50 mm
4.	Probe diameter D	
	-03	Ø 3 mm
	-04	Ø 4 mm
	-05	Ø 5 mm
	-06	Ø 6 mm
	-08	Ø 8 mm
5.	Thread	
	-G1	G 1/2
	-G2	G 1/4
	-G5	G 3/8
	-M5	M5
	-M6	M6
	-M8	M8
	-M0	M10
	-M2	M12
6.	Option	
	-VO	On site display
7.	Option	
	-LACK	Encapsulated PC Board
8.	Option	
	-1/3B	Higher sensor accuracy DIN class AA

EASYBUS-SENSOR MODULES FOR HUMIDITY / TEMPERATURE



EBHT-1R

Art. no. 602905

EASYBus-sensor modules for humidity/temperature (sensor tube at the side, FL = 50 mm)

EBHT-1K

Art. no. 602904

EASYBus-sensor modules for humidity/temperature (sensor tube at the side, FL = 220 mm)

EBHT-2K

Art. no. 602906

EASYBus-sensor modules for humidity/temperature (sensor tube pointing downwards, FL = 220 mm)

EBHT-SHUT

Art. no. 605863

EASYBus-sensor modules for humidity/temperature (incl. heat absorption hat) type incl. option HO and LACK

EBHT-KABEL

Art. no. 605029

EASYBus-sensor modules for humidity/temperature (separated sensor tube) type incl. option HO

Specifications:

Measuring ranges

Humidity: 0.0 ... 100.0 % RH

recommended range (standard): 30 ... 80 % RH

recommended range (option -HO): 5 ... 95 % RH

Temperature: -40.0 ... +120.0 °C or -40.0 ... +248.0 °F

Display options: with option UNI an alternative display unit can be shown instead of the humidity measuring value. The unit selection will be done via the interface or at the keyboard (by option VO).

Wet bulb temperature: -27.0 ... +60.0 °C

Dewpoint temperature: -40.0 ... +60.0 °C

Enthalpy: -25.0 ... +999.9 kJ/kg

Atmospheric humidity: 0.0 ... 640.0 g/kg

Absolute humidity: 0.0 ... 200.0 g/m³

Resolution: 0.1 % r.F. or 0.1 °C / 0.1 °F

Accuracy: (at nominal temperature = 25 °C)

Humidity: ±2.5 % RH (at recommended range)

Temperature: ±0.4 % of measuring value ±0.2 °C

Electric connection: elbow-type plug EN 175301-803/A (IP65), output 2-wire connection, max. 1.5 mm² each, no polarity

Ambient temperature

Electronic, housing: -25 ... +50 °C

Sensor (sensor tube): -40 ... +100 °C (for short time up to 120 °C)

Sensor tube: tube-Ø 14 mm, screwable, protection cap with stainless steel gauze (105 µm). Total length approx 50 or 220 mm (standard)

Version KABEL: „separated sensor tube“, sensor head (Ø 14 x 68 mm) connected to housing via approx. 1 m teflon cable.

Version SHUT: Radiation cap / weather protection

Applications: The radiation cap is designed for especially precise exterior dimensions. Powerful solar radiation and rain do not falsify measurements.

Design: Plastic radiation cap, Ø 110 mm, height approx. 140 mm. The design also includes a stainless steel wall mount with 3 fastening holes for screws with a maximum shaft diameter of 5 mm. Maximum projection 160 mm.

Optional extended length 300, 400 or 500 mm available. (please specify upon order!)

Option Display: 10 mm high LCD-display
The option VO additionally has 3 pushbuttons for calling min./max. values and adjustment of measuring parameters (offset and scale correction)

For outdoor use: Option „encapsulated PC board“ required. We also recommend using a heat absorption hat (weather protection shield) to avoid falsification of measuring data due to sun/rain etc.

Housing: Material: ABS, Protection rating: IP65

Dimensions: 82 x 80 x 55 (L x B x H)

Scope of supply: Device, manual

Other types upon request!

Accessories and spare parts:

Spare protection cap

Art. no. 603839

with stainless steel gauze (105 µ mesh size) - for standard and high humidity use

Bronze filter


Art. no. 605749

not for use in high humidity use

EBHT - [1] - [2] - [3] - [4] - [5] - [6]

Greisinger		
1.	Design type	
	1K	Surface /duct design
	1R	Surface design
	2K	Duct design
	KABEL	Surface design with cable, with High humidity sensor
	SHUT	Heat protective hat
2.	Options sensor	
	-HO	High humidity sensor
3.	Fitting length EL	
	-000	No installation length
	-050	50 mm
	-220	220 mm
	-300	300 mm
	-400	400 mm
	-500	500 mm
4.	Option	
	-VO	On site display
5.	Option	
	-LACK	Encapsulated PC Board
6.	Option	
	-UNI	Selectable humidity display instead of the standard humidity values

EASYBUS - SENSOR MODULES FOR TEMPERATURE

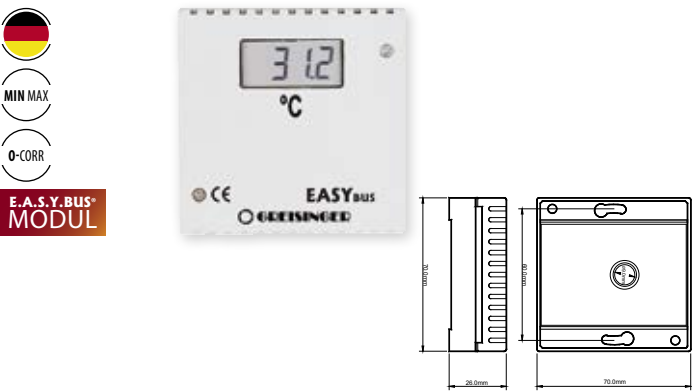

EBT-2R
Art. no. 602864
EASYBus - sensor modules for temperature


EBT-2RE
Art. no. 602866
EASYBus - sensor modules for temperature
Type with external sensor for lower or higher temperatures.

Specifications:	
Measuring ranges	
EBT-2R:	-25.0 ... +70.0 °C or -13.0 ... +158.0 °F
EBT-2RE:	-50.0 ... +150.0 °C or -58.0 ... +302.0 °F
Resolution:	0.1 °C / 0.1 °F
Accuracy:	±0.4 % of meas. value ±0.3 °C (at nominal temperature=25 °C)
Sensor element:	Pt1000 according to DIN IEC 751
Electric connection:	2 pin screw-type terminal, no polarity, max. 1.5 mm ²
Working temperature:	-25 ... +50 °C (electronic)
Sensor (EBT-2RE):	V4A-can, 5 mm Ø, 50 mm long, approx. 1 m silicone cable
Option Display:	10 mm high LCD-display
Housing:	Attractive surface-mounted housing for indoor installation (fits directly on flush-mounted boxes)
Dimensions:	70 x 70 x 26 mm (L x W x H)
Scope of supply:	Device, manual

EBT - 1 - 2

Greisinger		
1.	Design type	
	2R	with internal sensor
	2RE	with external probe
2.	Options	
	-VO	On site display

EASYBUS - SENSOR MODULES FOR HUMIDITY / TEMPERATURE

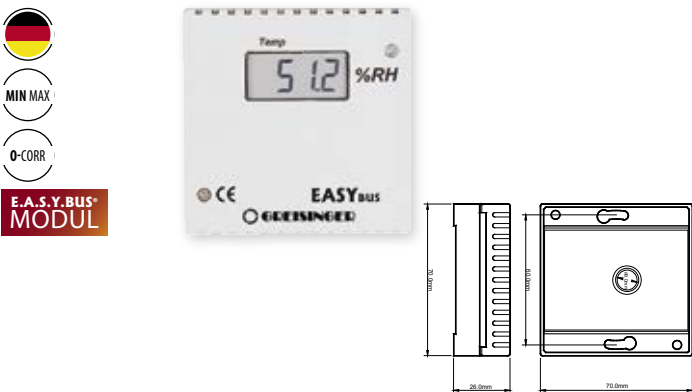


EBHT-2R
Art. no. 603476
EASYBus-sensor modules for humidity/temperature

Specifications:	
Measuring ranges	
Humidity:	0.0 ... 100.0 % RH
recommended range (standard):	30 ... 80 % RH
recommended range (option -HO):	5 ... 95 % RH
Temperature:	-25.0 ... +70.0 °C or -13.0 ... +158.0 °F
Display options:	refer to below
Resolution:	0.1 % RH or 0.1 °C / 0.1 °F
Accuracy: (at nominal temperature = 25 °C)	
Humidity:	±2.5 % RH (at recommended range)
Temperature:	±0.4 % vom Messwert ±0.3 °C
Electric connection:	2 pin screw-type terminal, no polarity, max. 1.5 mm ²
Working temperature:	-25 ... +50 °C
Option Display:	10 mm high LCD-display
Housing:	70 x 70 x 26 mm (L x W x D) (fits directly on flush-mounted boxes)
Scope of supply:	Device, manual

EBHT-2R - 1 - 2

Greisinger		
1.	Options sensor	
	00	No option
	HO	High humidity sensor
2.	General options	
	-00	Without option
	-VO	On site display
	-UNI	Selectable humidity display instead of the standard humidity values

EASYBUS - SENSOR MODULES FOR TEMPERATURE

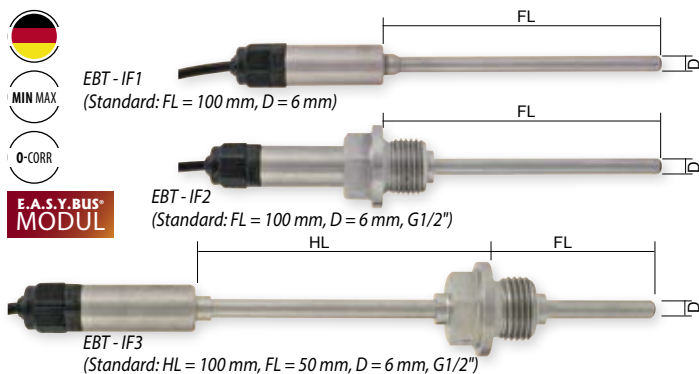

EBT-IF1

Art. no. 602797

EASYBus-sensor modules for temperature (-30.0 ... +100.0 °C)

EBT-IF2

Art. no. 602799

EASYBus-sensor modules for temperature (-30.0 ... +100.0 °C)

EBT-IF3

Art. no. 603862

EASYBus-sensor modules for temperature (-70.0 ... +400.0 °C)

Specifications:

Measuring ranges: The probe length FL has to be chosen long enough, that the allowable temperature range of the electronics situated in the tube sleeve is not exceeded. Other measuring ranges (max. -200 ... +500 °C) upon request

Measuring probe: internal Pt1000-sensor

Accuracy: (at nominal temperature = 25 °C)

Electronic: ±0.2 % of meas. value ±0.2 °C

Measuring probe: standard: DIN cl. B, optionally higher sensor accuracy available

Interface: EASYBus-interface
attached 2-pole cable, cable-length approx. 1 m

Operating ambient of electronics (in tube sleeve):

Working temperature: -25 ... +70 °C

Relative air humidity: 0 ... 100 % RH

Housing: stainless steel housing

Dimensions: depending on sensor construction

Tube sleeve: Ø 15 x 35 mm (without screwing)

Thread: G1/2" or on customer requirement (available threads M8 x 1, M10 x 1, M14 x 1.5, G1/8", G1/4", G3/8", G3/4")

Scope of supply: Device, manual

EBT - 1 - 2 - 3 - 4 - 5 - 6

Greisinger		
1.	Design type	
	IF1	Without thread
	IF2	With thread
	IF3	With thread and neck tube
2.	Measuring range	
	-MB1	-30,0 ... +100,0 °C, Standard IF1, IF2
	-MB2	-70,0 ... +400,0 °C, Standard IF3
3.	Fitting length EL	
	-050	50 mm, Standard IF3
	-100	100 mm, Standard IF1 und IF2
	-400	400 mm
	-500	500 mm
4.	Neck tube length	
	...	100 mm
5.	Probe diameter D	
	-D4	Ø 4 mm
	-D5	Ø 5 mm
	-D6	Ø 6 mm
	-D8	Ø 8 mm
	-99	front sold
6.	Thread	
	-G1	G 1/2, Standard IF3

EASYBUS - SENSOR MODULES FOR STANDARDIZED SIGNALS



EBN / K - ...

Art. no. 602839

EASYBus - sensor modules for standardized signals

EBN / W - ...

Art. no. 609775

EASYBus - sensor modules for standardized signals

General:

All standard signals (0 ... 2 V, 0 ... 10 V, 0 ... 20 mA, 4 ... 20 mA, others on request) can be acquired on the EASYBus with its current module. When using a according interface converter an the **EASYControl net** software different transmitters can be connected resp. watched.

Specifications:

Eingangssignal: 0 ... 2 V, 0 ... 10 V, 0 ... 20 mA or 4 ... 20 mA
(input is not isolated for EASYBus)

Measuring ranges: -1999 ... 9999 digit, Measuring range and decimal point can be set via free available software.

Accuracy: ±0.5 % (at nominal temperature = 25 °C)

Working temperature: -25 ... +60 °C

Storage temperature: -30 ... +70 °C

Interface: EASYBus-interface
attached 2-pole cable, cable-length approx. 1 m.

Electric connection: (for input signals)

EBN / K - ...: for connection to standardized signal source via 0.5 m connection cable.

EBN / W - ...: elbow-type plug according to EN 175301-803/A for plug-in into an existing transmitter connection.

Housing: splash-proof IP65

Dimensions: 48.5 x 48.5 x 35.5 mm (L x W x H)
with elbow-plug: 50.5 x 90 x 39.5 mm

Scope of supply: Device, manual

EBN - 1 - 2 - 3

Greisinger		
1.	Design type	
	K	Cable connection
	W	Angle plug
	G	EASYBus-interface, isolated, cable connection
2.	Input signal	
	-E1	0-2 V
	-E2	0-10 V
	-E3	0-20 mA
	-E4	4-20 mA
3.	Options	
	-00	Without option
	-VO	On site display

EASYBUS-SENSOR MODUL FOR CARBON DIOXIDE (CO₂)



E.A.S.Y.BUS[®] MODUL



- HIGHLIGHTS:
- excellent long-term stability
 - auto-calibration procedure
 - for surveillance of the recommended CO₂ concentration in ambient air

EBG-CO2-1R

Art. no. 604385
EASYBus-sensor modul for carbon dioxide (CO₂)

General:	
Due to the fact, that CO ₂ is an important indicator for the quality of air in rooms, it's super important to measure the CO ₂ content. The recommended CO ₂ limit value for ambient air is 1000 ppm. An exceeding of this limit causes tiredness and a loss of concentration. The high quality and precise CO ₂ -module works according to the infrared principle (NDIR). An auto-calibration procedure compensates aging effects and is responsible for an excellent long term stability of this CO ₂ -module. Additionally, there is a local display which shows beside the actual CO ₂ concentration, the minimum and maximum values as well as an optical alarm.	
Specifications:	
Measuring ranges:	
Standard:	0 ... 2000 ppm CO ₂ (carbon dioxide)
Option 5000:	0 ... 5000 ppm CO ₂ (carbon dioxide)
Measuring principle:	Infrarotverfahren (NDIR)
Accuracy:	
Standard:	±50 ppm ±2 % of meas. value (at 20 °C, 1023 mbar)
Option 5000:	±50 ppm ±3 % of meas. value (at 20 °C, 1023 mbar)
Interface:	EASYBus-interface
Auxiliary energy:	12 ... 30 V DC, max. 600 mA
Display:	approx. 10 mm high, 4-digit LCD-display
Working condition:	-10 ... +50 °C, 5 ... 95 % RH, 850 ... 1100 hPa
Storage condition:	-25 ... +60 °C, 5 ... 95 % RH, 700 ... 1100 hPa
Electric connection:	elbow-type plug acc. to EN 175301-803/A (IP65), max. wire cross section: 1.5 mm ² , wire diameter from 4.5 ... 7 mm
Terminal assignment:	2 x EASYBus, no polarity 2 x Auxiliary energy
Mounting:	with fixing holes for wall mounting
Mounting distance:	70 x 50 mm (W x H)
Fixing screws:	max. shaft-Ø 4 mm
Features:	min-/max-value memory, optical alarm, input of offset and scale for adjusting
Housing:	ABS
Dimensions:	82 x 80 x 55 mm (without elbow-type plug)
Weight:	approx. 225 g
Scope of supply:	Device, manual

Variant:	
EBG-CO2-1R-5000:	
Art. no. 605074	
Measuring ranges:	0 ... 5000 ppm CO ₂

Accessories and spare parts:	
GSN 24-750	
Art. no. 604387	
plug-in power supply (230 V AC => 24 V DC / 750 mA)	

EASYBUS-DISPLAY AND MONITORING DEVICE FOR 20 CHANNELS



E.A.S.Y.BUS[®] MODUL




EB 3000

Art. no. 600269
EASYBus-display and monitoring device for 20 channels

General:	
• Up to 20 sensor-modules can be connected • 2 further functions for calculation • 5 relay outputs (4 x controlling, 1 x alarm) • Controller functions can be assigned to any channel • Alarm monitoring for all connected EASYBus-modules • Up to 1000 m cable-length possible	
Specifications:	
Display range:	-1999 ... +9999 digit
Resolution, Accuracy:	depending on sensor module used
Sensors:	all EASYBus sensor modules
Sensor supply:	via EB 3000
Max. bus load:	30 EASYBus standard loads
Measuring channels:	20
Permitted cable length:	500 m (depending on type of cable and wiring)
Switching outputs:	4 relay outputs (NO), shared input. Outputs can be assigned to any channel
Alarm output:	1 relay output (change-over contacts)
Switching function:	230V AC, 5 A, ohm resistive load
Configuration:	directly on the device or via additional configuration software (supported converter is needed).
Min./Max. value memory:	from all connected sensor modules the max. and min. value are callable via front-side keypad.
Display:	main display: LED, 4-digit, 13 mm channel display: LED, 2-digit, 7 mm 11 more LEDs for e.g.: switching status and alarm
Interface:	EASYBus-interface
Connection:	2-wire connection in ring-, tree- or star type. No polarity.
Connection terminals:	screw-type/plug-in terminals
Ambient temperature:	-25 ... +50 °C (permissible ambient temperature)
Voltage supply:	230 V AC 50 / 60 Hz
Power consumption:	approx. 9 VA
Housing:	Transparent membrane keyboard IP65. Sealing for housing for installation according to IP65 will have to be ordered separately (option).
Dimensions:	96 x 48 x 100 mm (H x W x D).
Panel cutout:	90.5 x 43 mm (W x H).
Scope of supply:	Device, CD, manual

Option:	
IP	
Mounting seal to increase the protection class to IP65	

MOISTURE / TEMPERATURE CONTROLLING

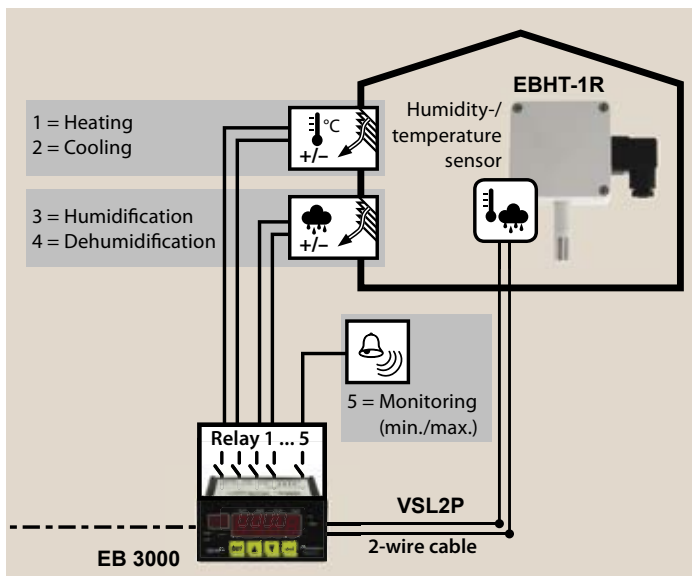

EB 3000 FTR

Art. no. 605923

Cost effective Set for Moisture / Temperature Controlling

General:

Cost effective monitoring and controlling of temperature and humidity. The humidity- / temperature sensor EBHT-1R will be connected with the EB 3000 via a single 2-wire twisted pair cable (e.g. bell wire). The maximum distance between sensor and controlling device is 500 m.

The components are fully configured. The only remaining work is to connect the modules via a 2-pole twisted wire and input the switching points.

Application:

Refrigeration warehouse, green house, storage room, terrarium, etc.

Specifications:

Scope of supply: EB 3000: monitoring and controlling device
EBHT-1R: temperature / humidity modul (p.r.t. page 147)
VSL2P: 10 m twisted pair cable (p.r.t. page 152)

Accessories and spare parts:

EBW 1

Art. no. 601136

Interface converter, for connection of max. 9 EASYBus data loggers to the RS232 interface of your PC. (power supply: 230 V AC / 50 Hz)

EBS 20M

Art. no. 601158

Software for recording and archiving of max. 20 sensor modules (p.r.t. page 100)

Note:

For configuration of the EB 3000 and recording / reading of connected EASYBus modules, a serial converter EBW 1 and software EBS 20M are needed.

ASSESSORIES



EBW 1

Art. no. 601136

Interface converter

General:

for connection of max. 7 EASYBus-modules to the RS232-interface (9-pin Dsub) of your PC.

Specifications:

Voltage supply: 230 V AC / 50 Hz, 12 / 24 V DC on request
Power consumption: approx. 5 W
Max. permissible sensor modules: 7 (depending on type of the used sensor modules)
Permissible cable length: 200 m (depending on type of cable and wiring)
Baud rate: 4800 Baud
Serial connection: RS232
Electrical isolated: yes
Overload display: no
Short-circuit proof: yes (limited: 30 s)
Operating temperature: 0 ... 50 °C
Humidity: 20 ... 80 % RH, non-condensing
Storage temperature: -20 ... +70 °C
Dimensions: 112 x 80 x 45 mm (H x W x D)
Bit-Recovery: no
Scope of supply: interface converter, 9-pin Dsub extension cable



EBW 3

Art. no. 601137

Interface converter

General:

for connection of one EASYBus-module (e.g. EASYLOG) to the USB-interface of your PC. (Power supply: via USB)

Specifications:

Voltage supply: not necessary
Power consumption: max. 0.5 W
Max. permissible sensor modules: 1 (depending on type of the used sensor modules)
Permissible cable length: 10 m (depending on type of cable and wiring)
Baud rate: 4800 Baud
Serial connection: USB
Electrical isolated: yes
Overload display: no
Short-circuit proof: no
Operating temperature: -25 ... +50 °C
Humidity: 20 ... 80 % RH, non-condensing
Storage temperature: -25 ... +70 °C
Dimensions: 56 x 31 x 24 mm (H x W x D)
Bit-Recovery: no
Scope of supply: interface converter, driver CD, manual

ASSESSORIES



EBW 64

Art. no. 601139

Interface converter

General:	
For connection of max. 64 EASYBus-modules to the RS232-interface of your PC.	
Specifications:	
Voltage supply:	230 V AC / 50 Hz
Power consumption:	approx. 15 W
Max. permissible sensor modules:	64 (depending on type of the used sensor modules)
Permissible cable length:	1000 m (depending on type of cable and wiring)
Baud rate:	4800 Baud
Serial connection:	RS232
Electrical isolated:	yes
Overload display:	yes
Short-circuit proof:	yes (passiv)
Operating temperature:	0 ... 50 °C
Humidity:	20 ... 80 % RH, non-condensing
Storage temperature:	-20 ... +70 °C
Dimensions:	100 x 75 x 110 mm (H x W x D)
Bit-Recovery	yes
Scope of supply:	interface converter, 9-pin Dsub extension cable



EBW 250

Art. no. 609308

Interface converter

General:	
For connection of up to 250 sensor modules via RS232, USB or network. For use as a repeater in an existing EASYBus system.	
Specifications:	
Voltage supply:	110 ... 250 V AC
Power consumption:	max. 100 W
Max. permissible sensor modules:	250 (depending on type of the used sensor modules)
Permissible cable length:	1000 m (depending on type of cable and wiring)
Baud rate:	300 ... 38400 Baud
Serial connection:	RS 232, USB, network, EASYBus input (repeater function)
Electrical isolated:	yes
Overload display:	yes
Short-circuit proof:	yes (aktiv)
Operating temperature:	0 ... 45 °C
Humidity:	30 ... 80 % RH
Storage temperature:	-20 ... +70 °C
Dimensions:	229 x 204 x 76 (H x W x D)
Bit-Recovery	yes
Scope of supply:	Interface converter, driver CD, manual

Assessories:

USB-Adapter

Art. no. 601109

for connection of an interface converter to the USB-interface of your PC



GWH 40K

GWH 10

GWH 40K


Art. no. 601166

Wall suspension with lock as protection against theft suitable for all EASYLog (except EASYLog 40NS W), EBN/K - ..., GIA 0420 WK and GRA 0420 WK

GWH 10

Art. no. 601169

simple wall suspension, made of stainless steel, suitable for all EASYLog (except EASYLog 40NS W).

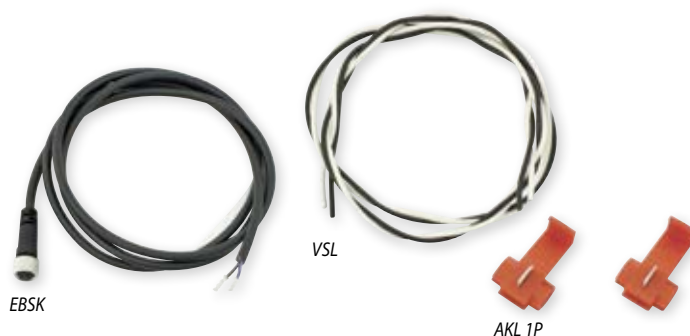

EBSK

VSL

AKL 1P

EBSK 01

Art. no. 601173

Special plug with approx. 1 m of cable for connection of one EASYLog, to the EASYBus

EBSK 03

Art. no. 601175

Special plug with approx. 3 m of cable for connection of one EASYLog, to the EASYBus

EBSK 10

Art. no. 601176

Special plug with approx. 10 m of cable for connection of one EASYLog, to the EASYBus (Note: the EASYLOG will be supplied without connection cable. The GSOFT40K includes a connection cable EBSK01. Please order EBSK01, EBSK03 resp. EBSK10 as required in case of permanent bus connection!)

VSL 2P

Art. no. 601178

Twisted special cable for EASYBus-system, cross section 2 x 0.75 mm²

AKL 1P

Art. no. 601185

Special branch terminal for connection to VSL 2P, 2 pieces



GSM-3000

Art. no. 607638

Alarm device

General:	
Sending SMS when alarms occur. Connectivity: e.g. for EB 3000, the GIA 20 EB or other devices with relay output or NPN switching output.	
Specifications:	
LCD-Display:	with text display
Inputs:	6
Outputs:	4
Miscellaneous:	SMS or call for up to 9 phone numbers Emergency battery SMS at power failure
Scope of supply:	GSM alarm device, antenna for screw on SMA connector, fastening material, 9 V battery, power supply, manual, connection instructions

ASSESSORIES



USB-Adapter

Art. no. 601109

For connection of an interface converter with RS232 connection to the USB interface

ALARM MONITORING



GNR 232 A

GNG 12-LE

Art. no. 604730

Plugin power supply 12 V DC / 300 mA

GNR 232 A

Art. no. 604719

Power supply and relay module for EBUW 232 A

Specifications:

Voltage supply:	230 V, 50 / 60 Hz
Output voltage:	12 V DC $\pm 5\%$ (regulated) 25 mA
Relay output:	volt-free changeover contacts, switching current max. 10 A ohmic load
Connection:	screw-type terminal
Dimensions:	96 x 61 x 60 mm (H x W x D)

EB 3000

Art. no. 600269

EASYBus-display, regulating and monitoring device for 20 channels
p.r.t. page 153

REMOTE OPERATION



WLAN 3200

LAN 3200

LAN 3200

Art. no. 609253

Gigabit Ethernet to USB converter

General:

For inquiring EASYBus modules, GMH handheld devices with interface or GDU5B 1000 via network. 2 USB ports for direct connection of EBUW 3, USB 3100 N or GDU5B 1000 (up to 15 with USB hub). Connection of EBUW 1, EBUW 64 or EBUW 240 via USB adapter (included to scope of supply)

Scope of supply: LAN 3200, power supply unit, USB adapter, manual, driver CD

WLAN 3200

Art. no. 610289

Gigabit-Ethernet or Wireless-LAN to USB converter

General:


For accessing EASYBus modules, GMH handheld devices with interface or GDU5B 1000 via local network or via WiFi. With 1 USB port for direct connection of one or more EBUW 3, USB 3100N or GDU5B 1000 (up to 15 with an USB hub). With an USB to serial converter for connection of an EBUW 1, EBUW 64 or EBUW 240.

Weight: 118 g

Dimensions: 100 x 100 x 25,5 mm (W x D x H)

Scope of supply: WLAN 3200, power supply unit, USB adapter, manual, CD

SWITCHING MODULES

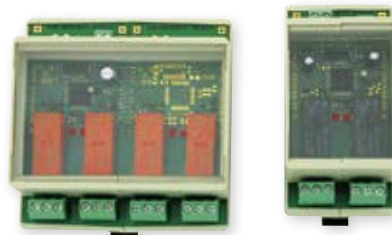

EBB 2 OUT / BP

Art. no. 603105

EASYBus switching module, 2 relays, bus-powered

EBB 2 OUT / 12V

Art. no. 603348

EASYBus switching module, 2 relays

EBB 4 OUT / BP

Art. no. 603141

EASYBus switching module, 4 relays, bus-powered

EBB 4 OUT / 12V

Art. no. 609776

EASYBus switching module, 4 relays

General:

The EBB ... OUT / ... are switching modules for the EASYBus that can be arbitrarily placed on a location in the bus system. The control of the modules' relays is realized by an alarm monitoring module EBUW 232A or by PC-software (e.g. EASYControlnet).

There are 2 different design types of the switching modules:

... / BP: Bus Power - no external auxiliary supply needed
... / 12V: external 12 V-supply needed - this allows faster switching and a higher operating reliability due to adjustable preferred relay states in case of a system failure. (Power supply unit not in scope of supply)

Specifications:

	EBB 2 OUT / BP	EBB 4 OUT / BP
Power supply:	Powered by the EASYBus	
Switching outputs:	2 changers	4 changers
Switching reaction:	<1 s	<2 s
Switching power:	max. 250 V AC / 16 A ohmic load	
Connection:	screw type terminal	
Dimensions:	96 x 48 x 60 mm	96 x 94 x 60 mm

Specifications:

	EBB 2 OUT / 12V	EBB 4 OUT / 12V
Power supply:	12 V DC $\pm 10\%$ / 150 mA	
Switching outputs:	2 changers	4 changers
Switching reaction:	<0.1 s	<0.1 s
Switching power:	max. 250 V AC / 16 A ohmic load	
Connection:	screw type terminal	
Dimensions:	96 x 48 x 60 mm	96 x 94 x 60 mm



EBB 4IN-BP

Art. no. 603477

EASYBus sensor module with 4 digital inputs

General:

The statuses of 4 potential-free switch contacts can be detected with the digital input via the EASYBus.

Specifications:

Power supply:	The device power is supplied from the EASYBus
Input:	4 digital inputs (for a potential-free switch contact)
Connection:	screw type terminal
Dimensions:	approx. 22.5 x 75 x 98 mm

WIRELESS DATA LOGGING SYSTEM



Measurand:

- **Temperature**
- **Relative humidity**
- **Atmospheric pressure and differential pressure**
- **Carbon monoxide (CO)**
- **Carbon dioxide (CO2)**

Connection via USB, WLAN, Ethernet, RS485, GSM/GPRS, WiFi

Upon request:

- Solar radiation
- Soil moisture
- Illuminance (lux)
- UVA, UVB and UVC Irradiance
- Rainfall
- Wind speed and direction
- Leaf wetness
- Standard signals, Analog, Digital (ModBus), Potentiometer, potential-free contacts, PT100, PT1000, ...

Description:

The Delta OHM wireless data logging system allows the monitoring of many physical quantities in various application fields.

The models that measure relative humidity and temperature can also calculate derived humidity quantities. The calculated quantities depend on the model and can be: Dew Point, wet bulb temperature, absolute humidity, mixing ratio, partial vapour pressure.

Depending on the model, the external measuring probes are connected to the data logger via M12 connector or screw terminal header. Some of the models are equipped with built-in sensors.

A version of data logger with terminal header inputs is available for the connection of:

- Transmitters with 0 ... 20 or 4 ... 20 mA current output and 0 ... 50 mV, 0 ... 1 V or 0 ... 10 V voltage output
- Pt100 / Pt1000 and K, J, T, N, E type thermocouple temperature sensors
- Sensors with voltage free contact output (counting of switchings) or potentiometric output

This allows to extend the monitoring capability of the system to countless other quantities, in addition to those listed.

Transmission frequency:

All the models (except HD35APD ...) are available in three versions, depending on the transmitting frequency band:

- 868 MHz (in compliance with the European normative EN 300 220),
- 902 ... 928 MHz (in compliance with U.S. FCC part 15 section 247 and I.C. RSS-210 regulations),
- 915.9 ... 929.7 MHz (in compliance with ARIB STD-T108 standard).

The base unit HD35APD is only available with 868 MHz or 902 ... 928 MHz transmitting frequency band.

The 902 ... 928 MHz transmitting frequency band can be reduced to 915 ... 928 MHz (Australia) or 921 ... 928 MHz (New Zealand).

The wireless transmission of the Delta OHM system is extremely robust against radio frequency interference. The system is able to detect any RF interference in the transmission channel, and to transfer the data communication in another channel of the same transmitting band. The correctness of the transmitted data is ensured by the bidirectional communication between the base unit and the remote data loggers.

Transmission range and Repeater:




To increase the distance between the base unit and the data loggers, the HD35RE... repeaters are used. More repeaters in cascade can be used ("multi-hop" network). Depending on HF-frequency band the typical transmitting range between two devices communicating directly is 300 m in open field (the range can be reduced if there are obstacles between the two devices.).



Application:

- Food services (refrigerated containers, cold storage, production and carriage of food)
- Health (storage of medicines, vaccines, blood, monitoring of operating rooms)
- Greenhouses and agriculture crops
- Environmental analyses (Air quality, meteorology and hydrology)
- Monitoring of solar panels
- Museums and document archives
- Transportation of perishable and fragile goods (monitoring of shocks by measuring the acceleration)
- Air conditioning
- Clean rooms
- Laboratories
- Industrial processes
- Buildings, offices, schools
- Building automation
- Meteorology
- Industry
- Pharmaceutical industry
- Warehouse
- Photovoltaics

EXAMPLES

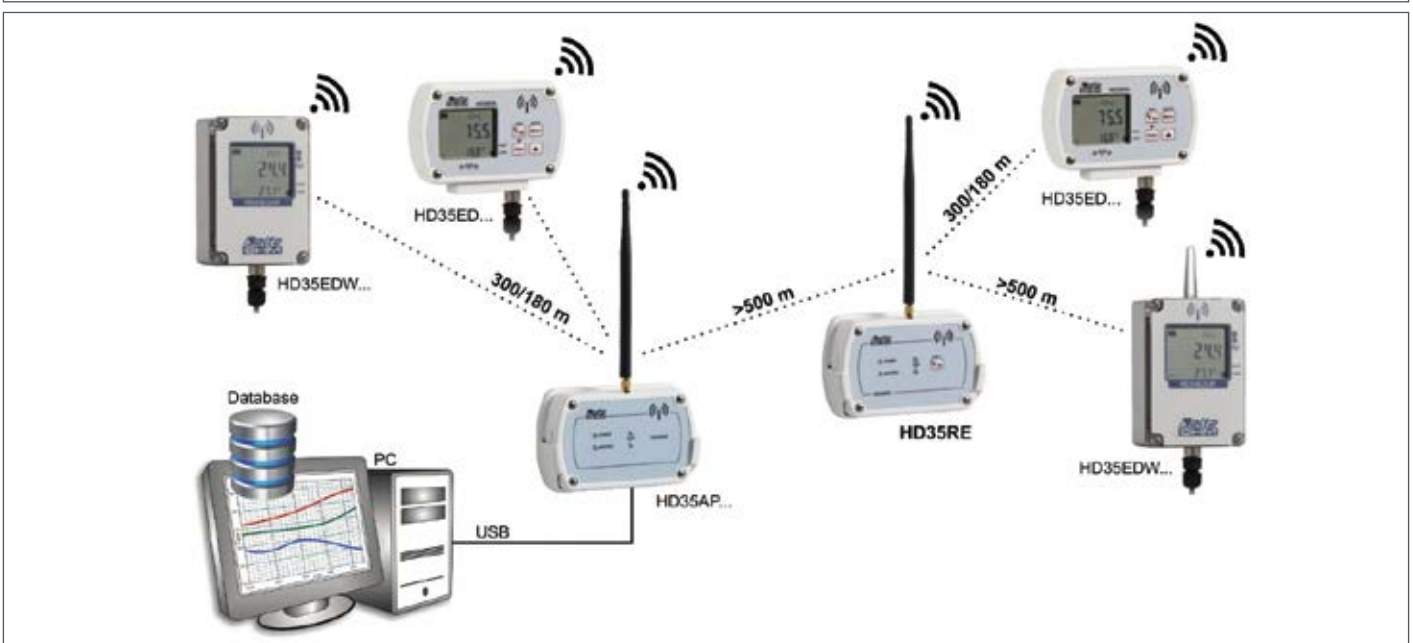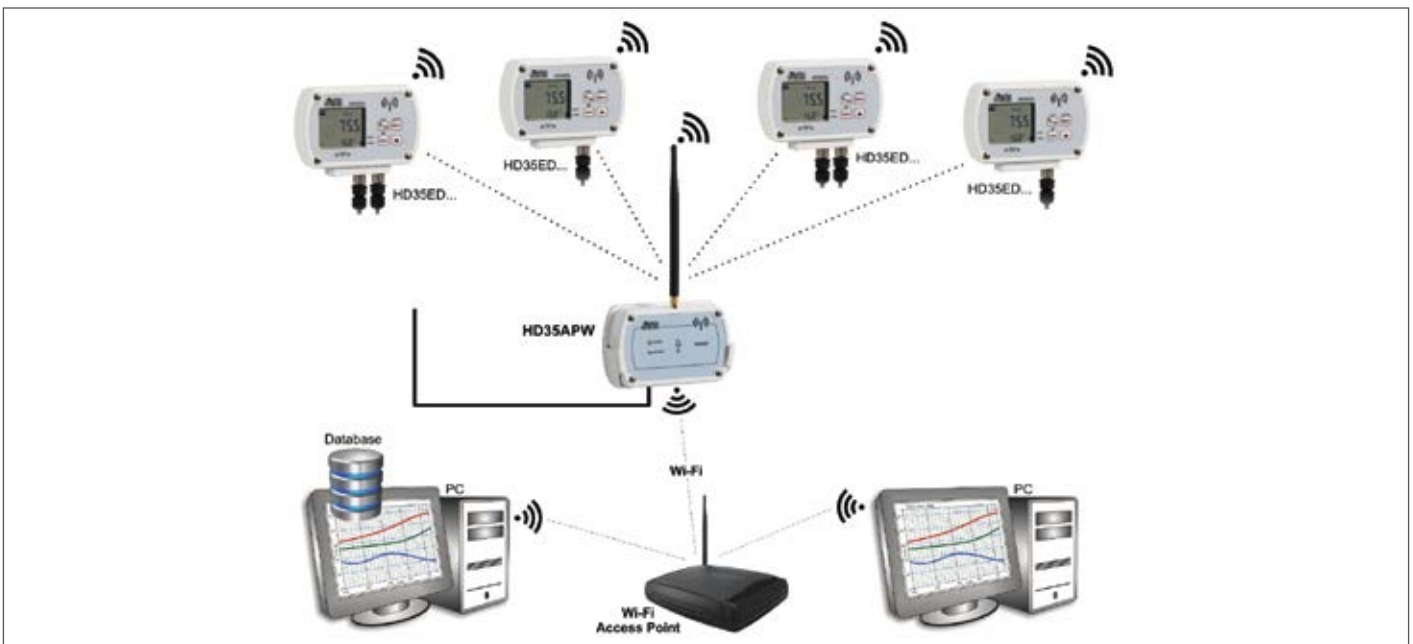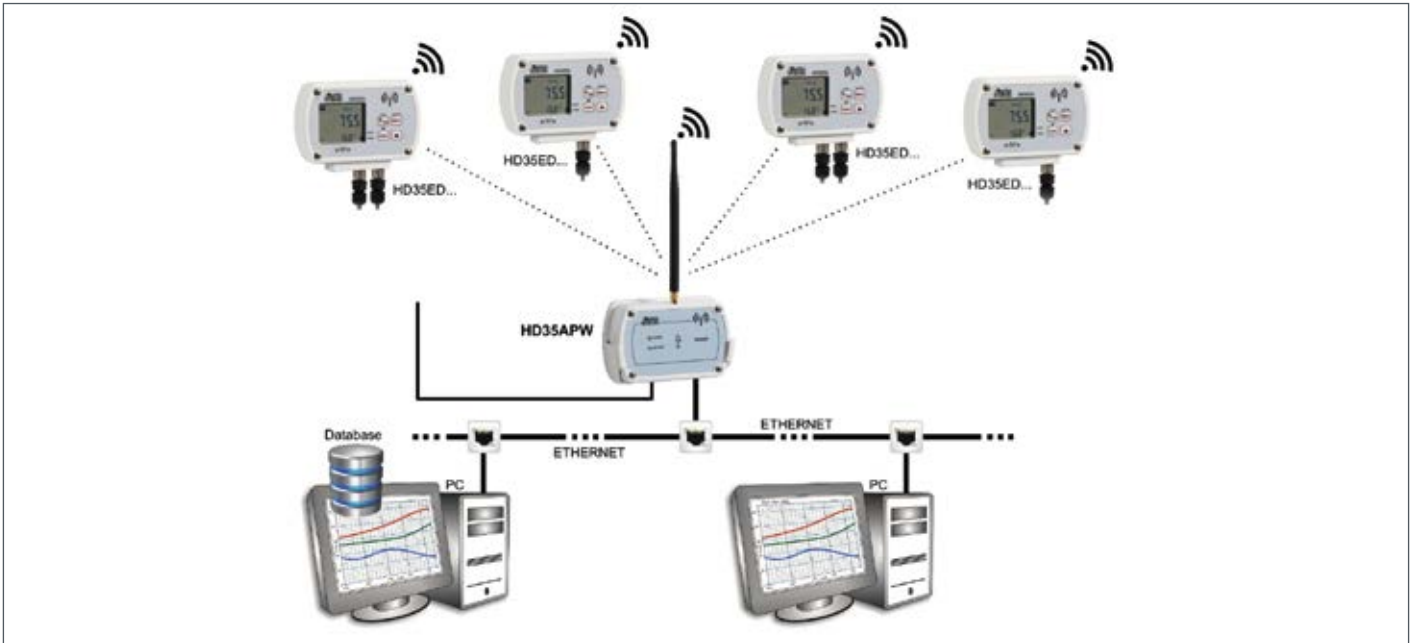

REPEATER



HD35-RE-E

Art. no. 608724

Repeater

General:

The device is able to act as a bridge between the base unit HD35-AP... and the remote data loggers HD35-ED..., allowing the communication distance between data loggers and base unit to be increased.

Several repeaters in cascade can be used. External 6 VDC power supply. Internal backup battery. Configuration via HD35-AP-S software. Wall mount removable (by using the included support) or fixed (with optional flanges) installation.

Specifications:

Power supply: Internal 3.7 V lithium ion rechargeable battery, capacity 2250 mA/h, JST 3-pole connector
Optional 6 V DC external power adapter (HD35-SWD06)
Powered directly from the PC USB port

Power consumption: 30 mA

Battery autonomy (typical): 3 days

Transmitting frequency: 868 MHz

Antenna: Whip external

Serial outputs: USB with Mini USB type connector (cable CP23)
Only for configuration and firmware update, not for data download

LED indicators: Presence of external power supply, battery charge level, RF communication status.

Keyboard: Push-button for connection / PING (for testing RF)

Working temperature and humidity range: -10 ... +60 °C / 0 ... 85 % RH not condensing

Housing

Material: LURAN® S 777K

Dimensions: 135 x 86 x 33 mm (excluding antenna) (H x W x D)

Installation: Wall mount support (supplied) for removable installation or flanges (optional) for fixed installation

Scope of supply: Device, battery HD35-BAT1, wall mount support HD35-03, without power supply

Accessories:

HD35-SWD06

Art. no. 609458

Power supply, 100 ... 250 V AC / 6 V DC / 1 A mains voltage

Signal range	HD35-RE-E	HD35-AP...	HD35-AP-D-E
		868 MHz frequency	
HD35-ED... with internal antenna	300 m	300 m	180 m

BASE UNIT



SOFTWARE HD35-AP-S INCLUDED

HD35-AP-D-E

Art. no. 608727

Base unit

General:

"Dongle" base unit for interfacing among PC and data loggers of the system. USB connection. Powered only by the PC USB port (the unit has no internal battery). Internal antenna.

Specifications:

Versions: With internal antenna

Power supply: Powered directly from the PC USB port

Transmitting frequency: 868 MHz

Transmitting range: See table

Output: USB with type A connector

Internal memory: The number of samples that can be stored depends on the type of data loggers connected. The capacity is 226,700 samples if all the data loggers record 7 quantities.

LED indicators: RF communication status

Working temperature and humidity range: -10 ... +60 °C / 0 ... 85 % RH not condensing

Dimensions: 62 x 25.5 x 13.2 mm (H x W x D)

Scope of supply: Device, basic HD35-AP-S software, manual

Comparison of the different Access Points

Connection	HD35-AP-D-E	HD35-AP-W-E	HD35-AP-G-E
USB	•	•	•
RS485			
Wi-Fi		•	
Ethernet		•	
GSM / GPRS			•
Protocols			
Proprietary on USB	•	•	•
Proprietary on TCP/IP		•	•
Modbus RTU			
Modbus TCP/IP		•	
SMS commands			•
Data processing			
Automatical data download in the Database	•	•	•
Sending of data via e-mail		•	•
Sending of data to an FTP address		•	•
Alarms			
Alarm thresholds	•	•	•
Alarm SMSes			•
Alarm e-mails		•	•

BASE UNIT



SOFTWARE HD35-AP-S
INCLUDED

HD35-AP-W-E

Art. no. 608723

Base unit, USB output, Wi-Fi and ethernet interface

HD35-AP-G-E

Art. no. 609450

Base unit, USB output and GSM module

General:

Device acting as an interface between the network data loggers that are positioned in the measurement sites, and the PC. It receives via wireless the data acquired by the remote data loggers and communicate with the PC via the USB output, the GSM connection or the Ethernet or WIFI local network.

Does not require the installation of USB drivers.

Directly powered by the USB port of the PC, if connected, or by the external 6 V DC power supply. Internal backup battery.

If the PC is not connected, the internal memory allows the storage of the measurement data received from the data loggers (the memory is managed in circular mode: when the memory is full, the oldest data are overwritten by the new ones).

Acoustic alarm with internal buzzer. Configuration via HD35-AP-S software. Wall mount removable (by using the included support) or fixed (with optional flanges) installation.

Specifications:

Power supply:	Internal 3.7 V lithium ion rechargeable battery, capacity 2250 mA / h, JST 3-pole connector
Power consumption:	30 mA without Ethernet / Wi-Fi and with typical GSM activity (**), 160 mA with Ethernet, 275 mA with Wi-Fi
Battery autonomy (typical):	3 days if not connected to the local network and with typical GSM activity (**), 11 hours with Ethernet, 8 hours with Wi-Fi
Transmitting frequency:	868 MHz
Antenna:	Whip external
Transmitting range:	See table on page before
Serial outputs:	USB with Mini USB type connector (cable HD35-CP23)
Ethernet connection: (Only HD35-AP-W-E)	Permits (if the Internet connection is available) sending alarm via e-mail and the recorded data via e-mail or to an FTP address (***). Allows the MODBUS TCP / IP protocol.
Wi Fi connection: (Only HD35-AP-W-E)	Permits (if the Internet connection is available) sending alarm via e-mail and the recorded data via e-mail or to an FTP address (***). Allows the MODBUS TCP / IP protocol.
GSM connection: (Only HD35-AP-G-E)	For sending alarm e-mail or SMS and data via e-mail or FTP (***). Allows the GPRS TCP / IP protocol.
Internal memory:	The number of samples that can be stored depends on the type of data loggers connected. The capacity is 226,700 samples if all the data loggers record 7 quantities.
LED indicators:	Presence of external power supply, battery charge level, RF communication status
Working temperature and humidity range:	-10 ... +60 °C / 0 ... 85 % RH not condensing
Housing	
Material:	LURAN® S 777K
Dimensions:	135 x 86 x 33 mm (excluding antenna) (H x W x D)
Installation:	Wall mount support (supplied) for removable installation or flanges (optional) for fixed installation
Scope of supply:	Device, battery HD35-BAT1, software HD35-AP-S, wall mount support HD35-03, power supply

(**) The intensive use of the GSM transmission can significantly increase the power consumption and reduce the battery life.

(***) In the basic version, the data are sent via FTP with an interval of not less than 2 minutes and only if in the network there are up to 5 data loggers. For the full FTP functionality, the PLUS option has to be requested.

Accessories p.r.t. page 163

TEMPERATURE WIRELESS DATA LOGGER



HD35ED-L-N/3-TC-E

Art. no. 608642

3-input temperature wireless data logger for NTC sensor temperature probes with cable (probes not included)

General:

HD35ED-L-N/3-TC-E stores the measures in its internal memory (42,000 samples) and transmits the logged data to the base unit automatically at regular intervals or upon request.

Specifications:

Temperature

Sensor:	NTC 10 kΩ @ 25 °C
Measuring ranges:	-40 ... +105 °C (the measuring range can be limited by the operating temperature of the used probe)
Resolution:	0.1 °C
Accuracy:	±0.3 °C in the range 0 ... +70 °C ±0.4 °C outside

Instrument

Transmission frequency:	868 MHz
Transmission range:	300 m (E, J) / 180 m (U) in open field (can be reduced in presence of obstacles or adverse atmospheric conditions)
Logging interval:	1, 2, 5, 10, 15, 30 s / 1, 2, 5, 10, 15, 30, 60 min
Power supply:	Non rechargeable lithium thionyl chloride (Li-SOCl ₂) internal battery, 3.6 V, AA format, 2-pole Molex 5264 connector
Battery life:	2 years typical (without repeaters, measurement interval 5 s and log interval 30 s)
Operating conditions:	-20 ... +70 °C / 0 ... 85 % RH non condensing
Dimensions:	135 x 102 x 33 mm (excluding the probes) (H x W x D)
Housing:	LURAN® S 777K
Protection degree:	IP 64
Scope of supply:	Device, battery, wall mount support HD35-03; For configuration a basic unit HD35-AP-... (see page 156/157) is required. NTC probes have to be ordered separately.

Necessary accessories:

DTP35N-1-3-C

Art. no. 608740

NTC 10 K Ω, temperature range -20 ... +75 °C, Ø 5 x 40 mm, temperature sensor, 3 m cable length, 4-pole M12 connector

Additional accessories p.r.t. page 163

TEMPERATURE WIRELESS DATA LOGGER



HD35ED-O-N-TV-E

Art. no. 608705
 Temperature wireless data logger with fixed vertical probe, without display

HD35ED-L-N-TV-E

Art. no. 609448
 Temperature wireless data logger with fixed vertical probe, with display

General:	
HD35ED-O-N-TV-E stores the measures in its internal memory (68,000 samples) and transmits the logged data to the base unit automatically at regular intervals or upon request. Temperature fixed vertical probe with NTC 10 KΩ temperature sensor. Acoustic alarm with internal buzzer. Configuration via HD35-AP-S software. Powered by the internal battery. Wall mount removable (by using the included support) or fixed (with optional flanges) installation.	
Specifications:	
Temperature	
Sensor:	NTC 10 kΩ @ 25 °C
Measuring ranges:	-40 ... +105 °C
Resolution:	0.1 °C
Accuracy:	±0.3 °C in the range 0 ... +70 °C ±0.4 °C outside
Instrument	
Transmission frequency:	868 MHz
Transmission range:	300 m (E, J) / 180 m (U) in open field (can be reduced in presence of obstacles or adverse atmospheric conditions)
Logging interval:	1, 2, 5, 10, 15, 30 s / 1, 2, 5, 10, 15, 30, 60 min
Power supply:	Non rechargeable lithium thionil chloride (Li-SOCl ₂) internal battery, 3.6 V, AA format, 2-pole Molex 5264 connector
Battery life:	2 years typical (without repeaters, measurement interval 5 s and log interval 30 s)
Operating conditions:	-20 ... +70 °C / 0 ... 85 % RH non condensing
Dimensions:	135 x 144 x 33 mm (H x W x D)
Housing:	LURAN® S 777K
Protection degree:	IP 64
Scope of supply:	Device, battery HD35-BAT1, wall mount support HD35-03; For configuration a basic unit HD35-AP-... (see page 156/157) is required.

Accessories p.r.t. page 163

TEMPERATURE AND HUMIDITY WIRELESS DATA LOGGER



Picture shows HD35ED-L-1N-TVI-E with display

HD35ED-0-1N-TVI-E

Art. no. 608703
 Temperature and humidity wireless data logger with T / RH fixed vertical probe, without display

HD35ED-L-1N-TVI-E

Art. no. 608640
 Temperature and humidity wireless data logger with T / RH fixed vertical probe, with display

General:	
HD35ED-...-1N-TVI-E stores the measures in its internal memory (24,000 samples) and transmits the logged data to the base unit automatically at regular intervals or upon request. Temperature and relative humidity fixed vertical probe with temperature sensor integrated in the R.H. module. Calculated quantities: dew point, wet bulb temperature, absolute humidity, mixing ratio, partial vapour pressure. Acoustic alarm with internal buzzer. Configuration via HD35-AP-S software or front key-board (only version with LCD). Powered by the internal battery. Wall mount removable (by using the included support) or fixed (with optional flanges) installation.	
Specifications:	
Humidity	
Sensor:	Capacitive
Measuring ranges:	0 ... 100 % RH
Resolution:	0.1 % RH
Accuracy (@ 23 °C):	±1.8 % RH (0 ... 80 % RH) ±[1.8 + 0.11 * (RH - 80)] % RH (remaining range)
Sensor	
Working temperature:	-40 ... +105 °C (RH max=[100 ⁻² *(T-80)] @ T= 80 ... 105 °C)
Temperature	
Sensor:	Sensor integrated in humidity module
Measuring ranges:	-40 ... +105 °C
Resolution:	0.1 °C
Accuracy:	±0.2 °C in the range 0 ... +60 °C ±(0.2 - 0.05 * T) °C in the range T=-40 ... 0 °C ±[0.2 + 0.032 * (T-60)] °C in the range T=+60 ... +105 °C
Instrument	
Transmission frequency:	868 MHz
Transmission range:	300 m (E, J) / 180 m (U) in open field (can be reduced in presence of obstacles or adverse atmospheric conditions)
Logging interval:	1, 2, 5, 10, 15, 30 s / 1, 2, 5, 10, 15, 30, 60 min
Power supply:	Non rechargeable lithium thionil chloride (Li-SOCl ₂) internal battery, 3.6 V, AA format, 2-pole Molex 5264 connector
Battery life:	2 years typical (without repeaters, measurement interval 5 s and log interval 30 s)
Operating conditions:	-20 ... +70 °C / 0 ... 85 % RH non condensing
Dimensions:	135 x 144 x 33 mm (H x W x D)
Housing:	LURAN® S 777K
Protection degree:	IP 64
Scope of supply:	Device, battery HD35-BAT1, wall mount support HD35-03; For configuration a basic unit HD35-AP-... (see page 156/157) is required.

Accessories p.r.t. page 163

TEMPERATURE AND HUMIDITY WIRELESS DATA LOGGER



HIGHER ACCURACY

HD35ED-L-1N-TV-E

Art. no. 608646

Temperature and humidity wireless data logger with T/RH fixed vertical probe

General:

HD35ED-L-1N-TV-E stores the measures in its internal memory (24,000 samples) and transmits the logged data to the base unit automatically at regular intervals or upon request. Temperature and relative humidity fixed vertical probe with NTC 10 K Ω temperature sensor and high accuracy R.H. sensor.

Calculated quantities: dew point, wet bulb temperature, absolute humidity, mixing ratio, partial vapour pressure.

Acoustic alarm with internal buzzer. Configuration via HD35-AP-S software or front keyboard. Powered by the internal battery. Wall mount removable (by using the included support) or fixed (with optional flanges) installation.

Specifications:

Humidity

Sensor:	Capacitive
Measuring ranges:	0 ... 100 % RH
Resolution:	0.1 % RH
Accuracy (@ 23 °C):	± 1.5 % RH (0 ... 90 % RH) ± 2 % RH (remaining range)
Sensor operating temperature:	-20 ... +80 °C

Temperature

Sensor:	NTC 10 k Ω @ 25 °C
Measuring ranges:	-40 ... +105 °C
Resolution:	0.1 °C
Accuracy:	± 0.3 °C in the range 0 ... +70 °C ± 0.4 °C outside

Instrument

Transmission frequency:	868 MHz
Transmission range:	300 m (E, J) / 180 m (U) in open field (can be reduced in presence of obstacles or adverse atmospheric conditions)
Logging interval:	1, 2, 5, 10, 15, 30 s / 1, 2, 5, 10, 15, 30, 60 min
Power supply:	Non rechargeable lithium thionyl chloride (Li-SOCl ₂) internal battery, 3.6 V, AA format, 2-pole Molex 5264 connector
Battery life:	2 years typical (without repeaters, measurement interval 5 s and log interval 30 s)
Operating conditions:	-20 ... +70 °C / 0 ... 85 % RH non condensing
Dimensions:	135 x 144 x 33 mm (H x W x D)
Housing:	LURAN® S 777K
Protection degree:	IP 64
Scope of supply:	Device, battery HD35-BAT1, wall mount support HD35-03; For configuration a basic unit HD35-AP-... (see page 156/157) is required.

TEMPERATURE, HUMIDITY AND ATMOSPHERIC PRESSURE WIRELESS DATA LOGGER



HD35ED-G-14BN-TVI-E

Art. no. 608699

Temperature, humidity and atmospheric pressure wireless data logger with T/RH fixed vertical probe

General:

HD35ED-G-14BN-TVI-E stores the measures in its internal memory (22,000 samples) and transmits the logged data to the base unit automatically at regular intervals or upon request.

Temperature and relative humidity fixed vertical probe with temperature sensor integrated in the R.H. module. Integrated pressure sensor.

Calculated quantities: dew point, wet bulb temperature, absolute humidity, mixing ratio, partial vapour pressure.

Acoustic alarm with internal buzzer. Configuration via HD35-AP-S software or front keyboard. Powered by the internal battery. Wall mount removable (by using the included support) or fixed (with optional flanges) installation.

Specifications:

Humidity

Sensor:	Capacitive
Measuring ranges:	0 ... 100 % RH
Resolution:	0.1 % RH
Accuracy (@ 23 °C):	± 1.8 % RH (0 ... 80 % RH) $\pm [1.8 + 0.11 * (RH - 80)]$ % RH (remaining range)

Sensor

Working temperature: -40 ... +105 °C (RH max = $[100 - 2 * (T - 80)]$ @ T = 80 ... 105 °C)

Temperature

Sensor:	Sensor integrated in humidity module
Measuring ranges:	-40 ... +105 °C
Resolution:	0.1 °C
Accuracy:	± 0.2 °C in the range 0 ... +60 °C $\pm (0.2 - 0.05 * T)$ °C in the range T = -40 ... 0 °C $\pm [0.2 + 0.032 * (T - 60)]$ °C in the range T = 60 ... 105 °C

Atmospheric pressure

Sensor:	Piezo-resistive
Measuring ranges:	300 ... 1.100 hPa
Resolution:	0.1 hPa
Accuracy:	± 0.5 hPa (800 ... 1100 hPa) @ T = 25 °C ± 1 hPa (300 ... 1100 hPa) @ T = 0 ... 50 °C

Instrument

Transmission frequency:	868 MHz
Transmission range:	300 m (E, J) / 180 m (U) in open field (can be reduced in presence of obstacles or adverse atmospheric conditions)
Logging interval:	2, 5, 10, 15, 30 s / 1, 2, 5, 10, 15, 30, 60 min
Power supply:	Non rechargeable lithium thionyl chloride (Li-SOCl ₂) internal battery, 3.6 V, AA format, 2-pole Molex 5264 connector
Battery life:	2 years typ. (without repeaters, measurement interval 10 s and log interval 30 s)
Operating conditions:	-20 ... +70 °C / 0 ... 85 % RH non condensing
Dimensions:	135 x 144 x 33 mm (H x W x D)
Housing:	LURAN® S 777K
Protection degree:	IP 64
Scope of supply:	Device, battery HD35-BAT1, wall mount support HD35-03; For configuration a basic unit HD35-AP-... (see page 156/157) is required.

TEMPERATURE, HUMIDITY, ATMOSPHERIC PRESSURE, CARBON MONOXIDE (CO) AND CARBON DIOXIDE (CO₂) WIRELESS DATA LOGGER



HD35ED-G-14BNAB-E

Art. no. 608702
Temperature, humidity, atmospheric pressure, carbon monoxide (CO) and carbon dioxide (CO₂) wireless data logger, with display

HD35ED-O-14BNAB-E

Art. no. 609834
Temperature, humidity, atmospheric pressure, carbon monoxide (CO) and carbon dioxide (CO₂) wireless data logger, without display

General:
HD35ED-G-14BNAB-E stores the measures in its internal memory (32,000 samples) and transmits the logged data to the base unit automatically at regular intervals or upon request. The sensors are all inside the housing. Calculated quantities: dew point, wet bulb temperature, absolute humidity, mixing ratio, partial vapour pressure. Acoustic alarm with internal buzzer. Configuration via HD35-AP-S software or front keyboard. Powered by the internal battery. Wall mount removable (by using the included support) or fixed (with optional flanges) installation.

Specifications:	
Humidity	
Sensor:	Capacitive
Measuring ranges:	0 ... 100 % RH
Resolution:	0.1 % RH
Accuracy (@ 23 °C):	±1.8 % RH (0 ... 80 % RH) ±[1.8 + 0.11 * (RH - 80)] % RH (remaining range)

Sensor
Working temperature: -40 ... +105 °C (RH max=[100⁻²*(T-80)] @ T= 80 ... 105 °C)

Temperature	
Sensor:	Sensor integrated in humidity module
Measuring ranges:	-40 ... +105 °C
Resolution:	0.1 °C
Accuracy:	±0.2 °C in the range 0 ... +60 °C ±(0.2 - 0.05 * T) °C in the range T=-40 ... 0 °C ±[0.2 + 0.032 * (T-60)] °C in the range T=+60 ... +105 °C

Atm. pressure	
Sensor:	Piezo-resistive
Measuring ranges:	300 ... 1.100 hPa
Resolution:	0.1 hPa
Accuracy:	±0.5 hPa (800 ... 1100 hPa) @ T=25 °C ±1 hPa (300 ... 1100 hPa) @ T=0 ... 50 °C

Carbon monoxide (CO)	
Sensor:	Electrochemical cell
Measuring ranges:	0 ... 500 ppm
Resolution:	1 ppm
Accuracy:	±3 ppm +3 % of measurement
Working temperature:	-5 ... +50 °C
Response time:	T ₉₀ <50 s

Carbon dioxide (CO ₂)	
Sensor:	Non-dispersive infrared rays (NDIR)
Measuring ranges:	0 ... 5.000 ppm
Resolution:	1 ppm
Accuracy:	±(50 ppm +3 % of measurement) @ 20 °C and 1013 hPa
Working temperature:	-5 ... +50 °C
Response time:	T ₉₀ <120 s (air speed= 2 m/s)
Instrument	
Transmission frequency:	868 MHz
Transmission range:	300 m (E, J) / 180 m (U) in open field (can be reduced in presence of obstacles or adverse atmospheric conditions)
Logging interval:	10, 15, 30 s / 1, 2, 5, 10, 15, 30, 60 min
Power supply:	Non rechargeable lithium thionyl chloride (Li-SOCl ₂) internal battery, 3.6 V, AA format, 2-pole Molex 5264 connector
Battery life:	1.5 years typical (without repeaters, measurement and log interval 2 min)
Operating conditions:	-10 ... +70 °C / 0 ... 85 % RH non condensing
Dimensions:	135 x 126 x 33 mm (H x W x D)
Housing:	LURAN® S 777K
Scope of supply:	Device, battery HD35-BAT1, wall mount support HD35-03; For configuration a basic unit HD35-AP-... (see page 156/157) is required.

Accessories p.r.t. page 163

TEMPERATURE, HUMIDITY AND CARBON DIOXIDE (CO₂) WIRELESS DATA LOGGER



HD35ED-O-1NB-E

Art. no. 609836

Temperature, humidity and carbon dioxide (CO₂) wireless data logger, without display

HD35ED-G-1NB-E

Art. no. 608701

Temperature, humidity and carbon dioxide (CO₂) wireless data logger, with display

General:

HD35ED-G-1NB-E stores the measures in its internal memory (44,000 samples) and transmits the logged data to the base unit automatically at regular intervals or upon request. The sensors are all inside the housing.

Calculated quantities: dew point, wet bulb temperature, absolute humidity, mixing ratio, partial vapour pressure.

Acoustic alarm with internal buzzer. Configuration via HD35-AP-S software or front keyboard. Powered by the internal battery. Wall mount removable (by using the included support) or fixed (with optional flanges) installation.

Specifications:

Humidity

Sensor:	Capacitive
Measuring ranges:	0 ... 100 % RH
Resolution:	0.1 % RH
Accuracy (@ 23 °C):	±1.8 % RH (0 ... 80 % RH) ±[1.8 + 0.11 * (RH - 80)] % RH (remaining range)

Sensor

Working temperature: -40 ... +105 °C (RH max=[100²*(T-80)] @ T= 80 ... 105 °C)

Temperature

Sensor:	Sensor integrated in humidity module
Measuring ranges:	-40 ... +105 °C
Resolution:	0.1 °C
Accuracy:	±0.2 °C in the range 0 ... +60 °C ±(0.2 - 0.05 * T) °C in the range T=-40 ... 0 °C ±[0.2 + 0.032 * (T-60)] °C in the range T=60 ... 105 °C

Carbon dioxide (CO₂)

Sensor:	Non-dispersive infrared rays (NDIR)
Measuring ranges:	0 ... 5.000 ppm
Resolution:	1 ppm
Accuracy:	±(50 ppm + 3 % of measurement) @ 20 °C and 1013 hPa
Working temperature:	-5 ... +50 °C
Response time:	T ₉₀ < 120 s (air speed= 2 m/s)

Instrument

Transmission frequency:	868 MHz
Transmission range:	300 m (E, J) / 180 m (U) in open field (can be reduced in presence of obstacles or adverse atmospheric conditions)
Logging interval:	10, 15, 30 s / 1, 2, 5, 10, 15, 30, 60 min
Power supply:	Non rechargeable lithium thionyl chloride (Li-SOCl ₂) internal battery, 3.6 V, AA format, 2-pole Molex 5264 connector
Battery life:	1.5 years typical (without repeaters, measurement and log interval 2 min)
Operating conditions:	-10 ... +70 °C / 0 ... 85 % RH non condensing
Dimensions:	135 x 126 x 33 mm (H x W x D)
Housing:	LURAN® S 777K
Scope of supply:	Device, battery HD35-BAT1, wall mount support HD35-03; For configuration a basic unit HD35-AP-... (see page 156/157) is required.

WIRELESS DATA LOGGER WITH 3 TERMINAL HEADER INPUTS



HD35ED-G-H-E

Art. no. 609837

Wireless data logger with three terminal header inputs for standard sensors, with display

General:

Wireless data logger with three terminal header inputs for the connection of transmitters with 4 ... 20 mA, 0 ... 1 V or 0 ... 50 mV output, Pt100/Pt1000 sensors, K, J, T, N, E thermocouples, sensors with voltage free contact output (max. one sensor) and potentiometric sensors. It stores the measures in its internal memory (from 36,000 to 68,000 samples depending on the number and type of connected sensors) and transmits the logged data to the base unit automatically at regular intervals or upon request. Acoustic alarm with internal buzzer. Configuration via HD35-AP-S software. Powered by the internal battery. Wall mount removable (by using the included support) or fixed (with optional flanges) installation.

Connection:

The model HD35ED-G-H-E is equipped with three terminal header inputs. Each input can be configured as input for: Pt100/Pt1000, thermocouple, 4 ... 20 mA (the shunt resistance is internal), 0 ... 1 V, 0 ... 50 mV or potentiometer. Only input 3 can also be configured as pulse counter (counting of switchings of a voltage-free contact).

Specifications:

Pt100/Pt1000

Measuring ranges:	-200 ... +650 °C
Resolution:	0.1 °C
Accuracy:	±0.1 °C (excluding probe error)
Connection:	2, 3 or 4 wires

Thermocouple

Measuring ranges:	K: -200 ... +1370 °C J: -100 ... +750 °C E: -200 ... +750 °C T: -200 ... +400 °C N: -200 ... +1.300 °C
Resolution:	0.1 °C
Accuracy:	±0.1 ~ 0.2 °C (excluding probe error)

Input 0/4 ... 20 mA

Shunt resistance:	Internal (50 Ω)
Resolution:	16 bit
Accuracy:	±2 µA

Input 0 ... 50 mV / 1 V

Input resistance:	100 MΩ
Resolution:	16 bit
Accuracy:	±0.01 % f.s.

Voltage-free contact

Switching frequency:	50 Hz max.
-----------------------------	------------

Potentiometer

Value, Resolution:	Typical 10 kΩ, 16 bit
Accuracy:	±0.01 % f.s.

Instrument

Transmission frequency:	868 MHz
Transmission range:	300 m (E, J) / 180 m (U) in open field (can be reduced in presence of obstacles or adverse atmospheric conditions)
Logging interval:	5, 10, 15, 30 s / 1, 2, 5, 10, 15, 30, 60 min
Power supply:	Non rechargeable lithium thionyl chloride (Li-SOCl ₂) internal battery, 3.6 V, AA format, 2-pole Molex 5264 connector
Battery life:	2 years typ. (without repeaters, measurement interval 10 s and log interval 30 s)
Operating conditions:	-10 ... +70 °C / 0 ... 85 % RH non condensing
Dimensions:	135 x 110 x 33 mm (H x W x D)
Housing:	LURAN® S 777K
Scope of supply:	Device, battery HD35-BAT1, wall mount support HD35-03; For configuration a basic unit HD35-AP-... (see page 156/157) is required.

WATERPROOF WIRELESS DATA LOGGER WITH FOUR TERMINAL HEADER INPUTS



HD35ED-W-H-E

Art. no. 608638
Waterproof wireless data logger with four terminal header inputs for standard sensors, without display

General:
Wireless data logger with four terminal header inputs for the connection of transmitters with 4 ... 20 mA, 0 ... 1/0 ... 10 V or 0 ... 50 mV output, Pt100/Pt1000 sensors, K, J, T, N, E thermocouples, sensors with voltage free contact output (max. one sensor) and potentiometric sensors. IP 67 waterproof housing. It stores the measures in its internal memory (from 28,000 to 58,000 samples depending on the number and type of connected sensors) and transmits the logged data to the base unit automatically at regular intervals or upon request. Acoustic alarm with internal buzzer. Configuration via HD35-AP-S software. Powered by the internal battery or external 7... 28 V dc power supply (option E). Installation: wall mounting with HD35-24W flange (optional)

Specifications:	
Pt100/Pt1000	
Measuring ranges:	-200 ... +650 °C
Resolution:	0.1 °C
Accuracy:	±0.1 °C (Ausschluss Sondenfehler)
Connection:	2, 3 or 4 wires
Thermocouple	
Measuring ranges:	K: -200 ... +1.370 °C E: -200 ... +750 °C N: -200 ... +1.300 °C
	J: -100 ... +750 °C T: -200 ... +400 °C
Resolution:	0.1 °C
Accuracy (excluding probe error):	K: ±0.1 °C (<600 °C) E: ±0.2 °C (>600 °C) N: ±0.1 °C (<600 °C) J: ±0.1 °C (>600 °C) T: ±0.1 °C
Input 0/4 ... 20 mA	
Shunt resistance:	Internal (50 Ω)
Resolution:	16 bit
Accuracy:	±2 µA
Voltage Input	
Input resistance:	100 MΩ
Resolution:	16 bit
Accuracy:	±0.01 % f.s.
Voltage-free contact	
Switching frequency:	50 Hz max.
Potentiometer	
Value:	Typical 10 kΩ
Resolution:	16 bit
Accuracy:	±0.01 % f.s.
Instrument	
Transmission frequency:	868 MHz
Transmission range:	In open field: 300 m (E, J)/ 180 m (U) with internal antenna
Logging interval:	5, 10, 15, 30 s / 1, 2, 5, 10, 15, 30, 60 min
Power supply:	Non rechargeable lithium thionil chloride (Li-SOCl ₂) internal battery, 3.6 V, C format, 2-pole Molex 5264 connector
Battery life:	4 years typ. (without repeaters, measurement interval 10 s and log interval 30 s)
Operating conditions:	-20 ... +70 °C / 0 ... 100 % RH non condensing
Dimensions:	140 x 80 x 55 mm (excluding ext. antenna) (H x W x D)
Housing:	Polycarbonate
Protection degree:	IP 67
Scope of supply:	Device, battery; For configuration a basic unit HD35-AP... (see page 156/157) is required.

WATERPROOF TEMPERATURE WIRELESS DATA LOGGER WITH FIXED VERTICAL PROBE



HD35ED-W-N-TV-E

Art. no. 608645
Waterproof temperature wireless data logger with fixed vertical probe, without display

General:	
IP 67 waterproof housing. It stores the measures in its internal memory (68,000 samples) and transmits the logged data to the base unit automatically at regular intervals or upon request. Temperature fixed vertical probe with NTC 10 KΩ temperature sensor. Acoustic alarm with internal buzzer. Configuration via HD35-AP-S software. Powered by the internal battery. Installation: wall mounting with HD35-24W flange (optional)	
Specifications:	
Temperature	
Sensor:	NTC 10 kΩ @ 25 °C
Measuring ranges:	-40 ... +105 °C
Resolution:	0.1 °C
Accuracy:	±0.3 °C in the range 0 ... +70 °C ±0.4 °C outside
Instrument	
Transmission frequency:	868 MHz
Transmission range:	In open field: 300 m (E, J)/ 180 m (U) with internal antenna.
Logging interval:	1, 2, 5, 10, 15, 30 s / 1, 2, 5, 10, 15, 30, 60 min
Power supply:	Non rechargeable lithium thionil chloride (Li-SOCl ₂) internal battery, 3.6 V, AA format, 2-pole Molex 5264 connector
Battery life:	2 years typical (without repeaters, measurement interval 5 s and log interval 30 s)
Operating conditions:	-20 ... +70 °C / 0 ... 100 % RH non condensing
Dimensions:	170 x 80 x 55 mm (excluding external antenna) (H x W x D)
Housing:	Polycarbonate
Protection degree:	IP 67
Scope of supply:	Device, battery; For configuration a basic unit HD35-AP... (see page 156/157) is required.

Accessories p.r.t. page 163

WATERPROOF TEMPERATURE AND HUMIDITY WIRELESS DATA LOGGER WITH T/RH FIXED VERTICAL PROBE



HD35ED-W-1N-TVI-E

Art. no. 608644

Waterproof temperature and humidity wireless data logger with T/RH fixed vertical probe, without display

General:

IP 67 waterproof housing. It stores the measures in its internal memory (24,000 samples) and transmits the logged data to the base unit automatically at regular intervals or upon request.

Temperature and relative humidity fixed vertical probe with temperature sensor integrated in the R.H. module.

Calculated quantities: dew point, wet bulb temperature, absolute humidity, mixing ratio, partial vapour pressure.

Acoustic alarm with internal buzzer. Configuration via HD35-AP-S software. Powered by the internal battery. Installation: wall mounting with HD35-24W flange (optional)

Specifications:

Humidity

Sensor:	Capacitive
Measuring ranges:	0 ... 100 % RH
Resolution:	0.1 % RH
Accuracy (@ 23 °C):	±1.8 % RH (0 ... 80 % RH) ±[1.8 + 0.11 * (RH - 80)] % RH (remaining range)

Sensor

Working temperature:	-40 ... +105 °C (RH max=[100 ² *(T-80)] @ T= 80 ... 105 °C)
-----------------------------	---

Temperature

Sensor:	Sensor integrated in humidity module
Measuring ranges:	-40 ... +105 °C
Resolution:	0.1 °C
Accuracy:	±0.2 °C in the range 0 ... 60 °C ±(0.2 - 0.05 * T) °C in the range T=-40 ... 0 °C ±(0.2 + 0.032 * (T-60)) °C in the range T=60 ... 105 °C

Instrument

Transmission frequency:	868 MHz
Transmission range:	In open field: 300 m (E, J) / 180 m (U) with internal antenna. > 500 m (E, J, U) with external antenna. (can be reduced in presence of obstacles or adverse atmospheric conditions)
Logging interval:	1, 2, 5, 10, 15, 30 s / 1, 2, 5, 10, 15, 30, 60 min
Power supply:	Non rechargeable lithium thionyl chloride (Li-SOCl ₂) internal battery, 3.6 V, AA format, 2-pole Molex 5264 connector
Battery life:	2 years typical (without repeaters, measurement interval 5 s and log interval 30 s)
Operating conditions:	-20 ... +70 °C / 0 ... 100 % RH non condensing
Dimensions:	170 x 80 x 55 mm (excluding external antenna) (H x W x D)
Housing:	Polycarbonate
Protection degree:	IP 67
Scope of supply:	Device, battery; For configuration a basic unit HD35-AP-... (see page 156/157) is required.

ACCESSORIES FOR WIRELESS DATA LOGGERS SYSTEM

Accessories:

HD35-CP23

Art. no. 609449

Configuration cable

HD35-SWD06

Art. no. 609458

Power supply, 100 ... 250 V AC / 6 V CD / 1 A mains voltage

HD35-24W

Art. no. 608715

Flange for fixing to the wall the waterproof models HD35-ED-W...

Specify when ordering on which instruments should be assembled.



HD35-BAT1

Art. no. 608712

3.7 V lithium-ion rechargeable battery. For the base units HD35-AP... (except HD35-AP-D and HD35-AP-R) and the repeater HD35-RE

HD35-BAT2

Art. no. 608713

3.6 V lithium-thionyl chloride (Li-SOCl₂) non-rechargeable battery. For the data loggers HD35-ED... and the alarm module HD35-ED-ALM.

HD35-ED-ALM-E

Art. no. 608726

Wireless module with two relay outputs for signalling alarm events. Controlled by the base unit, it allows to activate more signalling devices (sirens, blinking lights, etc.) or actuators. Transmitting range: 300 m in open field. Instrument operating temperature / humidity: -10 ... +70 °C / 0 ... 85 % RH. Powered by the internal battery. Supplied with 3.6 V non-rechargeable Li-SOCl₂ battery and HD35-03 wall mount support.

HD35-AP-PLUS

Art. no. 608714

Advanced version of the HD35-AP-S software. For Windows® operating systems.


Advanced (PLUS) functionalities:

The system basic functionality allows managing only the data in the local database of the PC in which the HD35-AP-S software is installed. Furthermore, limited FTP functionalities are allowed: the data are sent via FTP by the HD35-AP-G or HD35-AP-W base unit with an interval of not less than 2 minutes and only if in the network there are up to 5 data loggers. For advanced applications, the HD35-AP-PLUS option with the following additional features is available for a fee:

- Multi-client connection to the database: it is possible to store the data in either a local database or in a remote database on the local network to which the PC is connected; the display of the data can be done from any PC on the local network running the software HD35-AP-S.
- Full FTP functionality: no limit on the data sending interval and on the number of data loggers.


Basic functionality

Storing and viewing of data only in the local database.

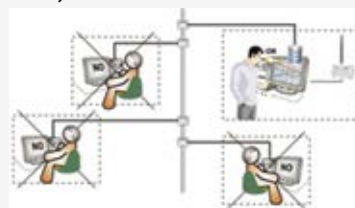

Plus functionality (Unlimited Access Points)

Storing of data in a local or remote database. Viewing of data from any PC of the local network in which the HD35-AP-S software has been installed.

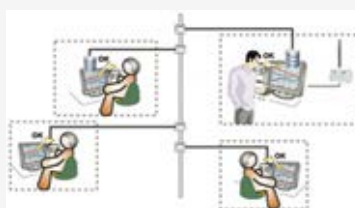

others upon request

MINIDATALOGGER FOR TEMPERATURE AND RELATIVE HUMIDITY



- HIGHLIGHTS:
- For temperature or temperature and relative humidity and dewpoint
 - Available with fixed or cable-bound sensors
 - Freely configurable limit values
 - Integrated report generator (PDF)
 - Software in scope of supply
 - Optional FDA 21 CFR Part 11 compatible software
 - Long battery life (2 years with 30 s logging interval)

HD208L.1NTV
Mini data logger for Temperature (NTC) and Relative humidity with permanently installed external sensors and display

HD208L.7PTC
Mini data logger for Temperature with external sensor (Pt1000) with cable, with display

On request, additional variants of the data logger for temperature or temperature and relative humidity with fixed or cable-bound sensors, one or two channels are available with or without LCD display.

General:

The data loggers of the series HD208 are compact instruments for monitoring temperature, relative humidity (RH) and dew point temperature. The data loggers are optionally available with integrated, permanently installed external or cable-bound sensors. Optionally with one sensor (temperature or temperature and relative humidity) or with two sensors (2 x temperature or 1 x temperature and relative humidity and 1 x temperature). Two limit values can be defined for each measurement. Flexible configuration of the logging parameters. In addition to the configuration of the data logger, the HD35AP-S software included in the scope of delivery enables realtime monitoring and transfer of measurements. At the end of the recording, an automatically created PDF report can be transferred to a PC conveniently via USB (without additional software).

Application:

Monitoring of climatic conditions during storage and transport of foods, pharmaceuticals and perishable goods and in laboratories, museums and document archives.

Specifications:	
RELATIVE HUMIDITY	
Sensor:	Capacitive
Measuring ranges:	0 ... 100 % RH
Resolution:	0.1 % RH
Accuracy:	±1.5 % RH (0 ... 85 % RH) / ±2.5 % RH (outside) @ 23 °C
Sensor working temperature:	-40 ... +80 °C
Response time T ₉₀ :	<20 s (air speed 2 m/s, without filter)
Stability:	1 % / year
TEMPERATURE	
Measuring ranges:	NTC 10 kΩ: -40 ... +105 °C, Pt1000: -50 ... +300 °C
With a permanently installed sensor, the measuring range can be limited by the maximum operating temperature range of the data logger (+75 °C).	
Resolution:	0.1 °C
Accuracy:	NTC10kΩ: ±0.3 °C (0 ... +70 °C) / ±0.4 °C (outside) Pt1000: class A, ±(0.15 + 0.002 t) °C
Stability:	0.1 °C / year
Unit of measurement:	°C or °F
Logging interval:	1, 2, 5, 10, 15, 30 s / 1, 2, 5, 10, 15, 30, 60 min
Storable quantities according to the model	
• Temperature	
• MKT (Mean Kinetic Temperature, calculated)	
• Relative Humidity	
• Dew Point	
• Battery Voltage	
Ring buffer or measurement stop with full buffer.	

Buffer size Ns:	Ns=921.600 / (1+0.75 x Ng) Example: >526.000 with one quantity stored (Ng=1) >147.000 with seven quantities stored (Ng=7)
Alarms:	Two alarm thresholds (configurable) for each measured quantity
Power supply:	not rechargeable lithium-thionyl chloride internal battery (Li-SOCl ₂), AA, 2-pole Molex 5264 connector
Battery life:	2 years typical, with logging interval 30 s
USB connection:	mini-USB connector (connecting cable not included in scope of supply)
Operating range:	-40 ... +75 °C / 0 ... 100 % RH non condensing
Material:	LURAN® S 777K
Precision degree:	IP 64
Installation:	Wall mount
Housing:	
Dimensions:	70 x 90 x 30 mm (instrument) 70 x 138 x 30 mm (TV model with fixed external sensor)
Weight:	approx. 150 g

Accessories and spare parts:	
TP35.1.5/C	External Pt1000 sensor for HD208L.7PTC, application range -50 ... +105 °C, sensor dimensions Ø 5 x 40 mm, AISI 316 stainless steel, M12 connection, cable length 5 m
Other sensors (NTC, Pt1000) with other cable lengths are also available on request for extended temperature ranges	
HD35-CP23	Art. no. 609449
USB connection cable (Necessary for configuration and for transfer of PDF reports and/or realtime monitoring)	
HD35 AP-CFR21	Optional software extension, compatible with the recommendations for archiving electronic measuring data according to FDA 21 CFR Part 11, incl. Audit Trail

TRANSMITTER



APPLICATION:	GTMU-MP.. GTMU ..	GTP-SG / TC 500	GTMU - IF ..	T03 BU ..	RT420 ..	GITT01 ..	MU 500 ..	IR-CT 20	GRHU ..MP	GHTU ..MP	HD 48 17 ..	HD 900..	HD46 /45..
Temperature	•	•	•	•	•	•	•	•		•	•	•	•
Air humidity									•	•	•	•	• / CO ₂
Ex-Protection						•	•						

DEVICE INFORMATION:

Catalogue page	167 / 168	169	170	170	171	172	173	174	177	178	175	176	179
----------------	-----------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----



APPLICATION:	GSMU ..	GMUD-MP..	A-10 / S-10 .. / S-11 .. / S-20 ..	WM 500	GT10-CO2-1R	GBS ..	LC..	TS 125 / 225	CVC-02 / 0201	TSA PWR	HD29-0-3-T...
Flow	•										
Pressure		•	•								
Carbon monoxide / -dioxide					•						
Level						•	•				
Power				•							
Switching contact / Namur								•			
Electricity / Voltage									•	•	
Air speed											•
Ex-Protection						•		•			

DEVICE INFORMATION:


Catalogue page	184	180	181	194	184	182	191	198	201	201	183
----------------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----



	OXY 36 .. MP	GPHU .. / GRMU ..	GLMU .. MP	LABO-...	VISION 2008	GEE771C-DN...	GODOX 200-...	pH 40	MU 125	UT 125	TV 125M / ST 125M	US2-...	FW1-...	RRI-...	LABO-F012-...
APPLICATION:															
Temperature									•	•					
Oxygen	•						•								
pH / Redox		•						•							
Conductivity			•												
Rotational speed				•											
Flow					•	•						•	•	•	•
Electricity										•	•				
Voltage										•	•				
Potentiometer									•	•					


DEVICE INFORMATION:															
Catalogue page	181 / 188	185 / 190	186	191	190	182	189	200	202	203	204	192	192	193	193
APPLICATION:	CT 500	CVT 500	VT 500	AF 500	CVG 500	BW 500	TV 500	TV 125 L	GS 125	FT 500	CT 500 P				
Electricity	•	•			•		•	•	•		•				
Voltage		•	•		•	•	•	•	•						
Potentiometer										•					
Frequency				•							•				
DEVICE INFORMATION:															
Catalogue page	194	195	195	199	196	196	197	197	198	200	199				

FREELY SCALEABLE TEMPERATURE TRANSDUCER PT1000



GTMU-MP-AP1
for direct screw connection

Standard type:
G = 1/2", FL = 100 mm, D = 6 mm

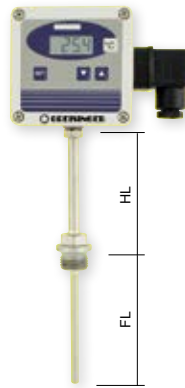

GTMU-MP-AP2
for high temperatures

Standard type:
G = 1/2", HL = 100 mm,
FL = 100 mm, D = 6 mm



GTMU-MP-AP3
indoor / outdoor probe
for direct wall mounting

Standard type:
FL = 50 mm, D = 3 mm



GTMU-MP-AP4
duct probe

Standard type:
FL = 100 mm, D = 6 mm



GTMU-MP-SHUT
with heat-
protective shield

**GTMU-MP-AP1**

Art. no. 607145

GTMU-MP-AP2

Art. no. 602820

GTMU-MP-AP3

Art. no. 602214

GTMU-MP-AP4

Art. no. 606675

GTMU-MP-SHUT

Art. no. 605012

General:

Temperature transducer (measuring range of -50 ... +400 °C) for:
• nearly all kinds of applications • output signal freely scalable
• on site temperature display • user-adjustment possible

Specifications:

Measuring ranges: -50.0 ... +400.0 °C, free scaleable (*The probe length FL has to be chosen long enough, that the allowable temperature of the case and the electronics of 70 °C is not exceeded!*)

Accuracy: (bei 25 °C)

Temperature display: ±0.4 % of measuring value ±0.2 °C

Output signal: ±0.2 % FS (compared to display)

Probe: Pt1000, 2-wire, DIN class B

Output signal: 4 ... 20 mA (2-wire), freely scaleable

Auxiliary energy: 12 ... 30 V DC or 18 ... 30 V DC (for output: 0- ... V)

Reverse voltage protection: 50 V, permanently

Permissible impedance (at 4 ... 20 mA): $R_A [\Omega] \leq (U_v [V] - 12V) / 0.02 A$

Permissible load (at 0 ... 1(10)V): $R_L [\Omega] > 3000 \Omega$

Display: approx. 10 mm high, 4-digit LCD-display

Working temperature: -25 ... +70 °C (electronic)

Storage temperature: -25 ... +70 °C

Relative humidity (electronic): 0 ... 95 % RH (non-condensing); If there is a risk of condensation due to temperature changes, please use our encapsulated or lacquered types (option).

Type SHUT: Heat protective shield / weather protective shield; **Application:** for highly precise outdoor measurements, strong solar radiation and rain without measurement falsification; **Design:** Weather protective shield made of plastic, Ø 110 mm, heights approx. 140 mm. Wall mounting panel made of stainless steel with 3 mounting holes for screws with maximal shaft diameter 5 mm. Largest overhang 160 mm.

Housing: ABS (IP65)

Probe tube: stainless steel

Electric connection: elbow-type plug acc. to EN 175301-803/A (IP65)

Mounting: 4 housing holes for wall mounting or by means of plastic tube clamps for duct mounting

Functions: min-/max-value memory, offset and slope digital adjustable, output signal freely scalable (without tools)

Scope of supply: Device, manual

Accessories and spare parts:**VAW**

Art. no. 610765

Mounting clip for VA-angle




GTMU-MP - **1** - **2** - **3** - **4** - **5** - **6** - **7**

Greisinger		
1.	Design type	
	AP1	With process connection for direct screw
	AP2	For higher temperatures, with process connection and neck tube
	AP3	Indoor/outdoor temperature sensor for direct wall mounting
	AP4	Duct sensor with sensor tube outlet centrally and perpendicularly down
	SHUT	Heat protective hat
2.	Output signal	
	-AA1	Analog output 4 ... 20 mA
	-AV1	Analog output 0-10 V
	-AV01	Analog output 0-1 V
3.	Fitting length EL	
	-050	50 mm, Standard A3
	-100	100 mm, Standard A1, A2, A4
	-100	100 mm, A3 special design type
	-200	200 mm
	-200	200 mm, A3 special design type
	-300	300 mm
	-400	400 mm
	-600	600 mm
4.	Probe diameter D	
	-D03	Ø 3 mm, Standard A3
	-D04	Ø 4 mm
	-D05	Ø 5 mm
	-D06	Ø 6 mm, Standard A1, A2, A4
	-D08	Ø 8 mm
5.	Thread	
	-G1	G 1/2, Standard A1, A2
	-G2	G 1/4
	-G3	G 3/4
	-G5	G 3/8
	-M5	M5
	-M6	M6
	-M8	M8
	-M10	M10
	-M12	M12
6.	Length of neck tube	
	-070	70 mm
	-100	100 mm, Standard A2
7.	Options	
	-000	Without option
	-LACK	Encapsulated PC Board

others on request

TEMPERATURE TRANSDUCER GTMU COMPLETE WITH PT100

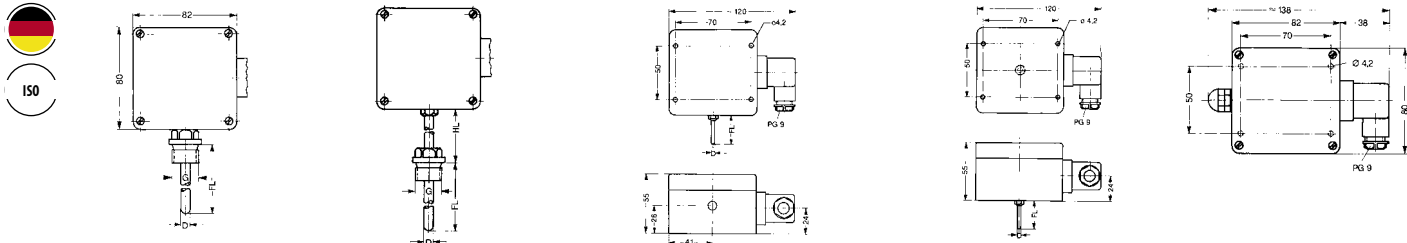

Design type 1
for direct screw connection

Standard type:
G = 1/2", FL = 100 mm,
D = 6 mm

Design type 2
for high temperatures

Standard type:
G = 1/2", HL = 50 mm,
FL = 100 mm, D = 6 mm

Design type 3
indoor / outdoor probe
for direct wall mounting

Standard type:
FL = 50 mm, D = 3 mm

Design type 4
duct probe

Standard type:
FL = 100 mm, D = 6 mm

Design type 5
for external probes

upon request

- GTMU-AP1
- GTMU-AP2
- GTMU-AP3
- GTMU-AP4
- GTMU-AP5

General:
The types 1 – 4 are supplied complete with Pt100 sensor, measuring transducer etc., calibrated and thus ready for use. Type 5 does not include sensor which is either already existing at your works or will have to be ordered separately according to your specifications. All versions have printed circuit lacquered on both sides for outdoor applications.

Specifications:	
Practical sensor elements:	
Resistance thermometer: Pt100 class B, potential-free	
Max. measuring ranges: (not available for every design type)	
Pt100:	-200 ... +800 °C
Standard measuring ranges:	
Pt100:	0 ... 100 °C, 0 ... 200 °C, -50 ... +50 °C, -50 ... +150 °C
Accuracy electronics:	<0.1 % of the current signal
Output signal:	
Standard:	4 ... 20 mA (2-wire)
Auxiliary energy:	U _v = 12 ... 30 V DC (at 0 ... 10 V: U _v = 18 ... 30 V DC); (for special types GTMU/GITT and GTMU/RT420: 8 ... 30 V)
Reverse voltage protection:	50 V permanently
Allowable burden (for 4 ... 20 mA):	R _A [Ω] ≤ (U _v [V] - 12 V) / 0.02 A (for special types GITT and RT420 refer to this pages)
Allowable load (for 0-__ Volt): R _L >3000 Ω	
Ambient temperature electronics:	0 ... +70 °C (-40 ... +85 °C at .../RT420 and .../GITT)
Temperature coefficient	
Pt100:	0.01 % / °C
Storage temperature:	-20 ... +70 °C
Housing:	ABS (IP65)
Probe tube:	stainless steel
Mounting:	with holes for wall mounting
Electric connection:	elbow plug acc. to EN 175301-803/A (IP65)
Scope of supply:	Device, manual

GTMU - 1 - 3 - 4 - 5 - 6 - 7 - 8 - 11

Greisinger		
1.	Design type	
	AP1	Channel /duct design with thread
	AP2	For higher temperatures, with process connection and neck tube
	AP3	Indoor / outdoor temperature sensor
	AP4	Duct sensor
	AP5	For external sensor connection
	SHUT	Heat protective hat
3.	Measuring range	
	-MB1	0 ... 100 °C
	-MB2	-50 ... +150 °C
	-MB3	0 ... +200 °C
	-MB4	-50 ... +50 °C
		others on request
4.	Signal output	
	-A1	4-20 mA
	-V2	0-10 V
5.	Fitting length EL	
	-100	100 mm
		others on request
6.	Probe diameter D	
	-3	3 mm
	-4	4 mm
	-5	5 mm
	-6	6 mm
	-8	8 mm
7.	Process connection	
	-G1	G 1/2
	-G2	G 1/4
	-G3	G 3/4
	-G5	G 3/8
8.	Length of neck tube	
	-050	50 mm, Standard A2
		each further 100 mm
11.	Option	
	-GITT	Electrically isolated transducer

TEMPERATURE-MEASURING TRANSMITTER IN SNAP-ON HOUSING



GTP-SG

Temperature-measuring transmitter in snap-on housing

General:

Design-type: PC board completely ready for operation (sensor not included) with any measuring range and any output. 3-pin connection terminal for Pt 100 in 2 or 3-wire technology. Connection terminal for output in 2-, 3-, or 4-wire technology - depending on type desired.

Specifications:

Sensor element:	for Pt 100 resistance thermometer acc. to DIN IEC 751. Suitable sensor can be supplied custom-designed according to your specifications or in standard design from stock (p.r.t. pages 205-220).
Sensor connection:	2- or 3-wire connection. Automatic line resistance compensation for 3-wire connection.
Auxiliary energy:	Uv = 12 ... 30 V DC (at 0 ... 10 V: Uv = 18 ... 30 V DC)
Reverse voltage protection:	50 V permanent
Permissible impedance (at 4 ... 20 mA):	$R_A [\Omega] \leq (U_v [V] - 12 V) / 0.02 A$
Operating temperature electronics:	0 ... +70 °C
Accuracy electronics:	±0.2 % FS
Temperature coefficient:	0.01 % / °C
Storage temperature:	-20 ... +70 °C
Relative humidity:	0 ... 80 % RH, non-condensing (standard)
Type option:	for top-hat rail (panel mounting), Width of housing (pitch) 22.5 mm
Mounting:	4 holes, 3.5 mm Ø each
Mounting distance:	43.5 x 58 mm (W x H)
Miscellaneous:	Potentiometer for zero point and scale
Electric connection:	screw-type terminals with wire protection and drill holes for testing pin, wire Ø max. 1.5 mm ² . Option: screw-type/plug-in terminal

GTP - 1 - 2 - 3 - 4 - 5

Greisinger		
1.	Model	
	SG	Temperature transmitter in snap-on housing
2.	Sensor element	
	P	Pt100
	-T	Pt1000
3.	sensor connection	
	...	2- or 3-wire
4.	Measuring range	
	-0100	0 ... 100 °C
	-0200	0 ... 200 °C
	-5050	-50 ... +50 °C
	-5015	-50 ... +150 °C
5.	Output signal	
	-AA1	Analog output 4 ... 20 mA

THERMOCOUPLE TRANSMITTER



TC 500

Thermocouple Transmitter

General:

Thermocouple Transmitter TC 500 converts thermovoltages into standard industry signals. The measuring range is programmable via rotary switches at the side.

Specifications:

Power supply

Supply voltage:	230 V AC ±10 % or 24 V DC ±15 %
Frequency AC:	47 ... 63 Hz
Power consumption:	<3.5 VA
Working temperature:	-10 ... +60 °C
CE-conformity:	EN55022, EN60555-2, IEC61000-4-4/5/11/13

Input

Thermocouple

Type J:	Fe-CuNi in range -100 ... +800 °C
Type K:	NiCr-Ni in range -150 ... +1200 °C
Type S:	Pt10Rh-Pt in range 0 ... +1600 °C


Output

Current:	0 ... 20 mA, 4 ... 20 mA switch selectable, burden ≤500 Ω
Voltage:	0 ... 10 V, 2 ... 10 V switch selectable, load max. 10 mA, short-circuit-proof
Start value:	adjustable approx. ±5 %
End value:	adjustable approx. ±5 %
Broken line:	outputs takes the end value (+1 %, overflow indication)
Short-circuit:	no indication (output takes terminal temperature)
Accuracy:	≤0.15 %, 1 °C
Temperature coefficient:	≤0.01 % / K
Housing:	Polycarbonate, UL94 V-0 TS35 acc. to DIN EN 60715:2001-09
Weight:	approx. 200 g
Protection class:	case IP30, terminals IP20 acc. to BGV A3
Connection:	screw terminals with pressure plate max. 2.5 mm ²

TC 500 - 1 - 2 - 3

Greisinger		
1.	Input	
	60	Thermocouple J, K, S programmable, output 0/4 ... 20 mA or 0/2 ... 10 V DC
2.	Supply voltage	
	0	230 V AC ±10 %
	5	24 V DC ±15 %
3.	Options	
	00	without option

TEMPERATURE TRANSMITTER PT 1000

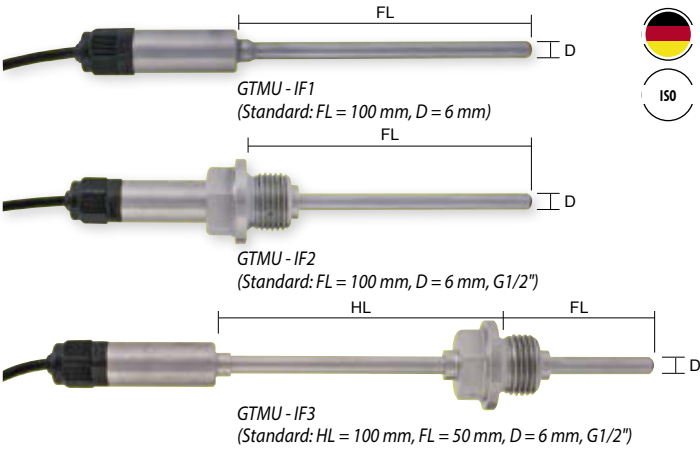

- GTMU-IF1**
Art. no. 602688
Temperature transmitter
- GTMU-IF2**
Art. no. 604409
Temperature transmitter
- GTMU-IF3**
Art. no. 603774
Temperature transmitter

General:	
High precision transmitter with compact design.	
Specifications:	
Measuring ranges:	The probe length FL has to be chosen long enough, that the allowable temperature range of the electronics situated in the tube sleeve is not exceeded.
GTMU-IF1 (Standard):	-30.0 ... +100.0 °C
GTMU-IF2 (Standard):	-30.0 ... +100.0 °C
GTMU-IF3 (Standard):	-70.0 ... +400.0 °C
	other measuring ranges (max. -200 ... +500 °C) upon request
Measuring probe:	internal Pt1000-sensor, DIN class B
Accuracy: (at nominal temperature = 25 °C)	
Electronic:	±0.2 % of measuring value ±0.2 °C
Measuring probe:	standard: DIN class B optionally higher sensor accuracy available
Output signal:	4 ... 20 mA (2-wire)
Auxiliary energy:	U _v = 10 ... 30 V DC
Permissible burden:	$R_x \leq (U_v - 10 V) / 0.022 A$ [R_x in Ohm, U_v in V]
Working temperature of electronic (in tube sleeve):	-25 ... +60 °C
Housing:	stainless steel housing
Dimensions:	depending on sensor construction
tube sleeve:	Ø 15 x 35 mm (without screwing)
Electric connection:	approx. 1 m long 4-pin cable (2 x current loop, 2 x interface)
Option:	
FL=...:	longer tube
HL=...:	longer collar tube
D=...:	other tube diameter
G=...:	other thread
MB=...:	other measuring ranges, set by factory
M12:	electric connection: M12 plug

ANALOG PT100-TRANSMITTER



T03BU/WE
Analog Pt100-transmitter (transmitter 0 ... 10 V, set by our works)

General:	
These transmitter are designed for industrial applications and are used to measure the temperature through Pt100 resistance thermometers in 2-/3-wire circuits connections. The 0 ... 10 V output signal is linear with temperature. The advantages of a continuous analog signal path and those of digital adjustment have been combined in the realization of this transmitter series.	
Specifications:	
Measurement input:	Pt100 (DIN EN60751)
Measuring ranges:	-200 ... +850 °C
Measuring span:	40 ... 1050 K
Zero shift:	at span <75 K: -40, -20, 0, 20 or 40 °C at span =75 K: ±50 °C at span >75 K: ±(span * 0.2 + 35 °C)
Sensor connection:	2- or 3-wire connection
Measuring current:	<0.5 mA
Max. perm. line resistance (3-wire):	11 Ohm per conductor
Sampling time:	continuous because of analog signal path
Output signal:	0 ... 10 Volt, 3-wire technology
Setting time on a temperature change:	≤10 ms
Transfer characteristic:	linear with temperature
Transfer accuracy:	±0.2 % FS
Calibration accuracy:	≤ ±0.2 °C or ±0.2 % of measuring span
Supply voltage: U _s	15 ... 30 V DC
Supply voltage error:	±0.01 % FS / V
Permissible load R _L :	R _L ≥ 10 kOhm
Load error:	≤ ±0.1 % FS
Operating temperature:	-40 ... +85 °C
Relative humidity:	0 ... 95 % RH (non condensing)
Storage temperature:	-40 ... +100 °C
Electric connection:	via terminals, cross section of connection terminals max. 1.75 mm ²
Housing:	PC-housing, suitable for installation in connection head acc. to DIN 43729 form B.
Operating position:	unrestricted
Dimensions:	Ø 44 mm x 21 mm
Protection rating:	Housing: IP54, connection terminals: IP00
Weight:	approx. 45 g

Accessories and spare parts:	
Hutschienenadapter Art. no. 603659 for snap-on the T03 BU to top-hat rail	

T03BU/WE - 1 - 2

Greisinger		
1.	Sensor connection	
	P2	Pt100 (2-wire)
	P3	Pt100 (3-wire)
2.	Measuring range	
	...	-200 ... +850 °C
	MB	Any measuring range desired

TEMPERATURE-MEASURING TRANSDUCER 4 ... 20 mA, PT100, 2- / 3- OR 4-WIRE



FOR HEAD AND RAIL CASE MOUNTING

RT420 with
rail adapter**RT420-00/WE**

Head transmitter, set by our works

RT420-SG/WE

Set by our works and mounted in snap-on rail housing

Specifications:	
Measuring ranges:	-200 ... +850 °C
Measuring span:	25 ... 1050 K
Zero shift:	-200 ... +825 °C
Resolution:	14 bit
Sensor connection:	2-, 3- or 4-wire connection
Measuring current:	<0.3 mA
Permitted resistance of connection cable:	max. 20 Ohm / wire
Compensation for cable error:	±0.02 K / Ohm (at 3-wire)
Sensor monitoring:	monitoring for sensor damage and short-circuit
Measuring cycle:	<700 ms
Linearisation:	linear to temperature acc. to IEC/DIN/EN 60 751-2
Accuracy:	±0.25 °C or ±0.1 % of measuring span
Temperature effect:	<±0.01 % / 1 K
Analog output:	4 ... 20 mA, 2-wire technology
Accuracy output:	<0.1 % of signal span
Auxiliary energy: U_B	8 ... 35 V DC (max. ripple factor: 3 Vss @ 50/60 Hz)
Permitted burden R_A:	$R_A \leq (U_B - 8 \text{ V}) / 0,023 \text{ A}$ [R _A in Ohm, U _B in V]
Effect of auxiliary energy:	±0.01 % / V
Power-on time:	10 s
Damping:	adjustable from 0 ... 30 s
Output limits:	3,5 mA, 23 mA
Signal for sensor damage:	3,5 mA or 23 mA
Operating temperature:	-40 ... +85 °C
Relative humidity:	0 ... 98 % RH (non condensing)
Storage temperature:	-55 ... +90 °C
Housing:	housing suitable for head mounting
Dimensions:	Ø 44 mm x 19 mm
Protection rating:	Housing: IP40, connection terminals: IP10
Electric connection:	via screw-type terminals
Weight:	approx. 35 g

Accessories and spare parts:**Hutschienenadapter**

Art. no. 603659

for snap-on the RT420 to top-hat rail

HIGHLIGHTS:

- low-price and robust (complete sealed - no pots, therefore vibration resistant and long time stable)
- selectable probe connection as 2- / 3- or 4-wire
- high accuracy (0.1 %)
- large ambient temperature range (-40 ... +85 °C)
- error message in case of sensor damage or sensor short-circuit
- functional warranty 5 years

RT420 - 1 - 2 - 3 - 4

Greisinger		
1.	Design type	
	00/WE	Head transmitter
	SG/WE	Head transmitter in snap-on housing
2.	Sensor connection	
	-P2	Pt100 (2-wire)
	-P3	Pt100 (3-wire)
	-P4	Pt100 (4-wire)
3.	Measuring range	
	-MB1	-200 ... +850 °C
	-MBS	0 ... +20 °C
	-MBS	0 ... +25 °C
	-MBS	0 ... +40 °C
	-MBS	0 ... +50 °C
	-MBS	-50 ... +50 °C
	-MBS	-200 ... +50 °C
	-MBS	0 ... +100 °C
	-MBS	-30 ... +100 °C
	-MBS	-50 ... +100 °C
	-MBS	0 ... +120 °C
	-MBS	0 ... +150 °C
	-MBS	-50 ... +150 °C
	-MBS	0 ... +160 °C
	-MBS	0 ... +170 °C
	-MBS	0 ... +180 °C
	-MBS	0 ... +200 °C
	-MBS	-50 ... +200 °C
	-MBS	0 ... +300 °C
4.	Sensor break signal	
	-FBU	3,5 mA
	-FBO	> 23 mA, Standard


PROGRAMMABLE, ELECTRICALLY ISOLATED, 4 ... 20 MA UNIVERSAL TRANSMITTER GITT01



RESISTANCE THERMOMETERS / THERMOCOUPLES /
RESISTANCE SENSOR / VOLTAGE SENSOR

HIGHLIGHTS:

- electrically isolated
- output linear to temperature
- high accuracy for the entire ambient temperature range (-40 ... +85 °C)
- also intrinsically safe, available with Ex-protection

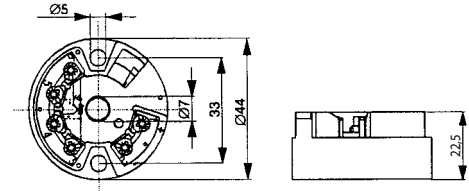

GITT01

Electrically isolated, 4 ... 20 mA universal transmitter

GITT01-EX

Electrically isolated, 4 ... 20 mA universal transmitter
(Ex-protection: ATEX II 1G Ex ia IIC T6/T5/T4)

Specifications:

Input signal: can be universally programmed to

Resistance thermometer:		max. meas. range	min. meas. span
Pt100	acc. to IEC 751	-200 ... +850 °C	10 K
Pt500	acc. to IEC 751	-200 ... +250 °C	10 K
Pt1000	acc. to IEC 751	-200 ... +250 °C	10 K
Ni100	acc. to DIN 43760	-60 ... +250 °C	10 K
Ni500	acc. to DIN 43760	-60 ... +150 °C	10 K
Ni1000	acc. to DIN 43760	-60 ... +150 °C	10 K

Thermocouples:		max. meas. range	min. meas. span
Type B	PtRh30-PtRh6	0 ... +1820 °C	500 K
Type C	W5Re-W26Re (ASTME 988)	0 ... +2320 °C	500 K
Type D	W3Re-W25Re (ASTME 988)	0 ... +2495 °C	500 K
Type E	NiCr-CuNi	-270 ... +1000 °C	50 K
Type J	Fe-CuNi (acc. to IEC 584)	-210 ... +1200 °C	50 K
Type K	NiCr-Ni	-270 ... +1372 °C	50 K
Type L	Fe-CuNi (acc. to DIN 43710)	-200 ... +900 °C	50 K
Type N	NiCrSi-NiSi	-270 ... +1300 °C	50 K
Type R	Pt13Rh-Pt	-50 ... +1768 °C	500 K
Type S	Pt10Rh-Pt	-50 ... +1768 °C	500 K
Type T	Cu-CuNi (acc. to IEC 584)	-270 ... +400 °C	50 K
Type U	Cu-CuNi (acc. to DIN 43710)	-200 ... +600 °C	50 K
	MoRe5-MoRe41	0 ... +2000 °C	500 K

Resistance-type sensor:		max. meas. range	min. meas. span
Resistance		10 ... 400 Ohm	10 Ohm
Resistance		10 ... 2000 Ohm	10 Ohm
Voltage sensor:		max. meas. range	min. meas. span
Voltage		-10 ... 100 mV	5 mV

Resistance thermometer:

Sensor connection:	2-, 3- or 4-wire connection
Meas. current:	<0.6 mA
Max. perm. line resistance:	11 Ohm / line
Accuracy:	
Pt100, Ni100:	±0.2 °C or ±0.08 % of measuring span
Pt500, Ni500:	±0.4 °C or ±0.16 % of measuring span
Pt1000, Ni1000:	±0.2 °C or ±0.08 % of measuring span
Temperature effect:	Td = ±(15 ppm/K * max. meas. range + 50ppm/K * meas. span)

Thermocouples:

Sensor connection:	2-wire connection
Sensor current:	<350 nA
Accuracy (typ.):	±0.5 K (Type: K, J, E, L, U), ±1.0 K (Type: N, C, D), ±2.0 K (Type: S, B, R, MoRe5-MoRe41)
CJC:	Pt100 internal or external (0 ... 80 °C)
CJC accuracy:	±1 °C
Temperature effect:	Td = ±(50 ppm/K * max. meas. range + 50 ppm/K * meas. span)
Output signal:	4 ... 20 mA or 20 ... 4 mA, 2-wire technology
Linearisation:	temperature linear, resistance linear or voltage linear
Auxiliary energy: U _b	8 ... 30 V DC (max. ripple factor: 5 Vss for U _b > 13 V)
Electr. isolation (E/O):	U _{eff} = 2 KV AC
Permitted load R _A :	R _A ≤ (U _b - 8 V) / 0.022 A [R _A in Ohm, U _b in V]
Supply effects:	≤ ±0.01 % / V deviation from 24 V
Load effect:	≤ ±0.02 % / 100 Ohm
Digital filter:	0 ... 60 s, configurable
Switch-on delay:	approx. 4 s
Response time:	1 s
Output limits:	3.8 ... 20.5 mA
Signal in case of sensor damage:	3.6 mA or ≥21.0 mA, configurable
Operating temperature:	-40 ... +85 °C
Climate class:	acc. to EN 60654-1, class C; condensation permissible
Vibration strength:	4 g / 2 ... 150 Hz acc. to IEC 60 068-2-6
Electric connection:	via terminals, cross section of connection terminals max. 1.75 mm ²
Housing:	PC-housing, suitable for installation in connection head acc. to DIN 43729 form B.
Dimensions:	Ø 44 mm x 22,5 mm
IP-rating:	Housing: IP54, connection terminals: IP00
Weight:	approx. 40 g
Ex-approved:	ATEX II 1G Ex ia IIC T6/T5/T4
Power supply set:	U _i ≤ 30 V DC, I _i ≤ 100 mA, P _i ≤ 750 mW C _i , L _i = negligibly small
Measuring circuit:	U _o ≤ 8.2 V DC, I _o ≤ 4.6 mA, P _o ≤ 9.35 mW
Max. connection values:	Lo = 4,5 mH (ia IIC), 8,5 mH (ia IIB) Co = 974 nF (ia IIC), 1900 nF (ia IIB)

Accessories and spare parts:

Hutschiennadapter

Art. no. 603659

rail adapter for snap-on the GITT01 to top-hat rail

TEMPERATURE TRANSMITTER (ELECTRICALLY ISOLATED)

**MU500-51-...**

Art. no. 602611 (MU500-51-0-00-GN)

Art. no. 604331 (MU500-51-5-00-GN)

Temperature transmitter (Pt100)

MU500-53-...

Art. no. 602613 (MU500-53-0-00-GN)

Temperature transmitter (Pt1000)

MU500-EX-51-...

Art. no. 603257 (MU500-EX-51-0-00-GN)

Art. no. 604830 (MU500-EX-51-5-00-GN)

Temperature transmitter (Pt100)

MU500-EX-53-...

Temperature transmitter (Pt1000)

General:

- Electrically isolated: between input / output / supply voltage
- 2 power-supply-designs with wide range of allowed supply voltage:
10 ... 30 V DC / 10 ... 42 V AC or 85 ... 265 V AC / 110 ... 125 V DC
- 22.5 mm standard case for rail mounting TS35
- Several measuring ranges, selectable via rotary switch at front panel
(13 for Pt100, 16 for Pt1000)
- Offset and span adjustable

For Ex-designs:

- Input intrinsically safe ATEX II (1) G [Ex ia] IIC, II (1) D [Ex iaD]
- Burden max. 1000 Ω

**Specifications:**

Measuring ranges:	selectable via rotary switch
Pt100:	-50 ... 0, -50 ... +50, -30 ... +20, -30 ... +70, -20 ... +30, -20 ... +80, 0 ... 50, 0 ... 100, 0 ... 150, 0 ... 200, 0 ... 300, 0 ... 450, 0 ... 600 °C
Pt1000:	-50 ... 0, -50 ... +50, -30 ... -20, -30 ... -10, -20 ... -10, -20 ... 0, -10 ... 0, -10 ... +10, 0 ... 10, 0 ... 20, 0 ... 30, 0 ... 40, 0 ... 50, 0 ... 100, 0 ... 150, 0 ... 200 °C
Offset adjust:	offset: approx. $\pm 8 \Omega$ ($\triangle 20$ °C for Pt100, $\triangle 2$ °C for Pt1000) span: approx. ± 20 %
Sensor connection:	2- or 3-wire connection
Sensor current:	approx. 1 mA (Pt100), approx. 0.25 mA (Pt1000)
Output signal:	0 ... 20 mA, 4 ... 20 mA, 0 ... 10 V or 2 ... 10 V (selectable via DIP switch)
max. load:	burden ≤ 1 k Ω (at mA), load: max. 15 mA (at V)
Basic accuracy:	≤ 0.2 % of measuring range
Temperature coefficient:	≤ 0.01 %/K
Output accuracy:	≤ 0.1 % of measuring range
Power supply:	... - 0 - 00: 85 ... 265 V AC / 110 ... 125 V DC ... - 5 - 00: 10 ... 42 V DC / 10 ... 30 V AC
Power consumption:	max. 2.2 W / 3.3 VA
Isolation voltage:	500 V AC, according to VDE 0110 Gr. 2 between input / output / supply voltage
Test voltage:	4 kV DC between input / output / supply voltage
Working temperature:	-10 ... +60 °C
Electrical connection:	screw-terminals with pressure plates, max. 2.5 mm ²
Ex-Protection:	TÜV 03 ATEX 2283, II (1) G [Ex ia] IIC, II (1) D [Ex iaD]

Connection data:

MU 500-ex-ia-51-... U0 = 1,3 V, I0 = <3 mA, P0 = <3 mW, C0 = 29 μ F,
L0 = 100 mH, Ci = 5 nF, Li = 0 mH

MU 500-ex-ia-53-... U0 = 4,9 V, I0 = <3 mA, P0 = <3 mW, C0 = 2,2 μ F,
L0 = 100 mH, Ci = 5 nF, Li = 0 mH

Dimensions: 22,5 x 75 x 110 mm (B x H x T)

Protection class: IP 30 (case), IP 20 (terminals)

Weight: approx. 200 g

Scope of supply: Device, manual

MU 500 - -

Greisinger		
1.	Device type	
	51	Pt100, 13 measuring ranges
	53	Pt1000, 16 measuring ranges
2.	Supply voltage	
	0	85 ... 265 V AC
	5	10 ... 30 V AC/DC

MU 500 EX- - -

Greisinger		
1.	Device type	
	51	Pt100, 13 measuring ranges
	53	Pt1000, 16 measuring ranges
2.	Supply voltage	
	0	85 ... 253 V AC/110 ... 125 V DC
	5	10 ... 30 V AC/DC
3.	Options	
	00	without option

INFRARED-MEASURING TRANSDUCER



HIGHLIGHTS:

- small infrared sensor heads with 22:1 optical resolution
- rugged and applicable without cooling up to 180 °C ambient
- adjustable emission factor
- freely scaleable analogue output
- illuminated liquid crystal display

**NON-CONTACT TEMPERATURE
MEASURING FROM -50 ... +975 °C**

IRCT20

Art. no. 602832

Precision infrared transducer, -50 ... +975 °C, optic 22:1

Application:

Glass, paper, plastic industries, automotive industry, metal industry, quality assurance / maintenance

Specifications:

Measuring ranges:	-50 ... +975 °C freely scaleable via programming keys
Spectral sensitivity:	8 ... 14 μm
Optic resolution:	22:1 (precision glass optics)
System accuracy:	±1% or ±1 °C (higher value applicable)
Reproducibility:	±0.5 % or ±0.5 °C (higher value applicable)
Nominal temperature:	23 ±5 °C
Temperature coefficient:	0.05 % or 0.05 °C/K (higher value applicable)
Temperature resolution:	0.1 °C
Response time:	150 ms (95 %)
Emission-, transmission factor:	adjustable from 0.100 ... 1.100
Output signals:	0 ... 20 mA, 4 ... 20 mA, 0 ... 5 V, 0 ... 10 V thermocouple type J or K

Output impedance

mA:	max. 500 Ohm (at 8 ... 36 VDC)
V:	min. 100 kOhm load resistance
Thermo couple:	20 Ohm
Voltage supply:	8 ... 36 VDC
Power consumption:	max. 100 mA
Cable length:	1 m (standard), 3 m, 15 m
Protection rating:	IP65 (NEMA-4)

Ambient temperature

Measuring head:	-20 ... +180 °C
Electronic box:	0 ... +65 °C

Storage temperature

Measuring head:	-40 ... +180 °C
Electronic box:	-40 ... +85 °C

Relative humidity: 10 ... 95 % RH, non condensing

Vibration (meas. head):

IEC 68-2-6: 3G, 11 ... 200 Hz, each axis

Schock (Messkopf):

IEC 68-2-27: 50G, 11 ms, each axis

Weight 40 g / 420 g

(meas. head / elec. box):

Dimensions electronic box: 120 x 70 x 30 mm

Scope of supply: electronics-box with LCD, stainless steel sensor head (M12) incl. screw nut, 1 m high temperature sensor head cable, manual

Options:

CB3
3 m sensor head cable

CB15
15 m sensor head cable

CF

Auxiliary lens for measuring of smallest objects
measuring zone dia 0.6 mm @10 mm, in long distance 1.5:1

Accessories and spare parts:

MW

Art. no. 604567

mounting bracket, fixed

MB

Art. no. 604568

mounting bolts with M12x1 thread

MG

Art. no. 603711

mounting fork, adjustable in 2 axis with M 12x1 mount

FVS

Art. no. 603138

standard blow clear header

FVL


Art. no. 603712

laminar blow clear header

ISO-WPS-IRCT


Art. no. 604967

calibration certificate 23 °C, 110 °C, 510 °C

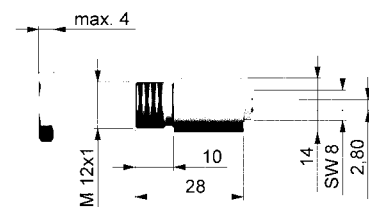


Further special design types (e.g. for metal processing, or with other optics) up on request

Optic resolution (standard)

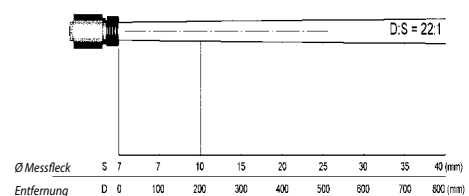

Optic resolution (with option CF)

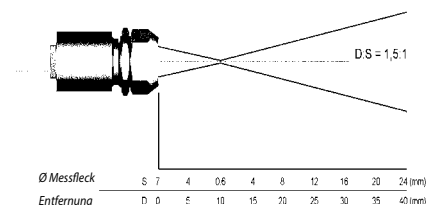

MEASURING TRANSDUCERS FOR TEMPERATURE, RELATIVE HUMIDITY AND DEWPOINT



HIGHLIGHTS:

- Proven temperature and relative humidity / dewpoint measuring transducer, freely configurable
- Various designs

**HD 4817S17TC2.2**

Measuring transducer for temperature and relative humidity, RS485 Modbus-RTU output, cable-bound probe (stainless steel AISI 304), probe length 335 mm, cable length 2 m, without display

HD 4817ETC2.2

Measuring transducer for temperature and relative humidity, 4...20mA output, extended temperature range, cable-bound probe (stainless steel AISI 304), probe length 335 mm, cable length 2 m, without display

HD 4817TO1

Measuring transducer for temperature and relative humidity, 4...20mA output, horizontally fixed probe (stainless steel AISI 304), probe length 135 mm, without display

See below for example versions and additional designs/combinations.

General:

The measuring transducers HD 48... measure temperature or temperature and relative humidity/or dewpoint. The measured values can be transferred via standard output signals (voltage or current interface) or via RS 485 Modbus-RTU. The power supply takes place via DC or AC voltage. The HD48... measuring transducers are optionally available with a display. A 20 µm stainless steel filter protects the sensors from dust and particles (filters are available for additional areas of application). The transmitters are factory-calibrated and ready for use immediately. Proven sensor technology with temperature compensation

Application:

For monitoring of the temperature and humidity for ventilation/air conditioning (HVAC), pharmaceuticals, in museums, clean rooms, ventilation ducts, auditors, conservatories or animal husbandry.

Specifications:

Extended measuring range:	Standard: -20 ... +80 °C (NTC Sensor) Extended: -40 ... +150 °C (Pt100 class A)
Power supply:	16 ... 40 VDC or 24 VAC (Screw type terminal block connection)
Operating temperature:	0 ... 60 °C (TV sensor), for TO and TC series -20 ... +100 °C (standard) or -40 ... +150 °C (extended measuring range)
Protection class:	IP66
Dimensions:	80 x 84 x 44 mm

Specifications sensor:

Relative humidity:	Capacitive
Measuring ranges:	0 ... 100 % RH
Accuracy:	at 15 ... 35 °C ±1.5 % RH (0 ... 90 % RH) ±2.0 % RH (90 ... 100 % RH)
Repeatability:	0.4 % RH
Working temperature sensor:	-20 ... +80 °C -40 ... +150 °C
Temperature:	Standard NTC Extended Pt100 class A
Measuring ranges:	-20 ... +80 °C -40 ... +150 °C
Accuracy:	±0.3 °C (0 ... +70 °C) ±0.3 °C
Repeatability:	0.05 °C 0.05 °C

Accessories and spare parts:**HD48TCAL**

Kit for connection to PC (USB cable), configuration, calibration, incl. cable and CD ROM, only for analog output models

HD48STCAL

Kit for connection to PC (USB cable), configuration, calibration, incl. cable and CD ROM, only for RS485 output models

P7

20 µm PTFE protection for Ø 14 mm probes, M12x1, up to 150 °C

P8

20 µm stainless steel grid and Pocan for Ø 14 mm probes, M12x1, up to 100 °C

Calibration solutions HD 75 and HD 33 see next page.

HD48- **1** - **2** - **3** - **4** - **5** - **6**

Greisinger		
1.	Signal output	
	Empty	4 ... 20 mA
	V	analog output 0 ... 10 V DC
	S	RS 485 Modbus-RTU (Exclusive)
2.	Measured variables	
	07	Temperature
	01	Relativ humidity
	17	Temperature and relativ humidity
	77	Temperature and Dew point
3.	Temperature ranges	
	Empty	Standard range -20 ... +80 °C
	E	Extended range -40 ... +150 °C (not for TV version)
4.	Probe length	
	TO1	135 mm
	TO2	335 mm
	TC1	135 mm
	TC2	335 mm
	TV	Vertical sensor (wall mounting)
5.	Cable length	
	2	2 m
	5	5 m
	10	10 m
6.	Display	
	Empty	without display
	L	with LCD display

HUMIDITY AND TEMPERATURE TRANSMITTERS FOR METEOROLOGICAL APPLICATION



- HIGHLIGHTS:
- Temperature and humidity transmitter, optional mit Strahlungsschutzhaube
 - Output 4 ... 20 mA, 0 ... 1 V or RS 485 Modbus-RTU. Configurable temperature output (with HD 9008TRR / HD 9009 TRR)

HD 9008 TRR
Configurable meteorological double measuring transducer for temperature and relative humidity (-40 ... +80 °C, 0 ... 100 % r.h.) signal output 4 ... 20 mA, supply 10 ... 30 V DC

HD 9009 TRR
Configurable meteorological double measuring transducer for temperature and relative humidity (-40 ... +80 °C, 0 ... 100 % RH) signal output 0 ... 1 V DC, supply 5 ... 35 V DC

HD 9008 T17S
Meteorological double measuring transducer for temperature and moisture (-40 ... +80 °C, 0 ... 100 % RH), RS 485 Modbus-RTU output, supply 5 ... 30 V DC

HD 9008 TR.2
Meteorological double measuring transducer for temperature and moisture (-40 ... +80 °C, 0 ... 100 % r.h.), 4 ... 20 mA output, supply 10 ... 30 V DC

General:
HD 9008 TRR and HD 9009 TRR are microprocessor-based monoblock transmitters for the measurement of temperature and relative humidity. The sensor elements (capacitive humidity sensor and Pt100 sensor element for the temperature) are arranged at the end of the plastic pipe. The humidity measuring transducer can be calibrated locally, for which purpose salt solutions with 33 % and 75 % saturation are required. At 0 % RH, the signal output is 4 mA (or 0 V) and at 100 % RH the signal output is 20 mA (or 1 V). The standard configuration of the temperature measuring range is -40 ... +80 °C, corresponding to 4 ... 20 mA, or 0 ... 1 V. The signal output of the temperature sensor can be configured freely with a Pt100 simulator or with precision resistances (within the range of -40 ... +80 °C, with a minimum range of 25 °C. (Only with HD 9008 TRR and HD 9009 TRR).


Application:
Climatic measurements, meteorology, agriculture, general use for measurement of outside temperature and humidity. Extensive mounting accessories, such as wall mounts and radiation shields, are available. When used without a radiation shield, assembly with the sensor head facing downwards is recommended in order to minimise the influence of dust deposits. The radiation shield (material: LURAN S777K) is extremely weatherproof with high UV resistance. Shielded cables are recommended for the communication of output signals.

Specifications:	HD9008TRR	HD9009TRR
Working temperature	-40 ... +80 °C	
Electronics (sensor):		
Power Supply:	10 ... 30 V DC (4 ... 20 mA)	5 ... 35 V DC (2 mA)
Relative humidity		
Measuring ranges:	0 ... 100 % RH	
Accuracy at 20 °C:	±1.5 % RH (at 0 ... 90 % RH) ±2.0 % RH (Outside)	
Response time T ₆₃ :	3 min. with filter; 6 s without filter	
Output Signal:	0 % RH = 4.0 mA 100 % RH = 20.0 mA	0 % RH = 0 V 100 % RH = 1 V

Temperature		
Messbereich (Standard Configuration):	-40 ... +80 °C	
Accuracy:	±0.15°C ±0.1% of measurement	
Response time T ₆₃ :	3 min. with filter; 6 s without filter	
Output signal:	-40 °C=4.0 mA 80 °C=20.0 mA	-40 °C = 0 V 80 °C = 1 V
Dimensions:	ø 26 x 225 mm	
Cable dimensions maximum length	200 m	10 m
Max. diameter:	0,5 mm ²	0,5 mm ²

- Recommended accessories:**
- HD9007 A1**
12-ring protection L=190 mm complete with mounting brackets.
- HD9007 A2**
16-ring protection L=240 mm complete with mounting brackets.
- HD 75**
Saturated salt solution 75 % R.H. for calibration with adapter M 24 x 1.5
- HD 33**
Saturated salt solution 33 % R.H. for calibration with adapter M 24 x 1.5
- HD9008.21.1**
Holder for vertical sensor, wall distance 250 mm, hole ø 26.
- HD9008.21.2**
Holder for vertical sensor, wall distance 125 mm, hole ø 26.

Dimensions of transmitter:

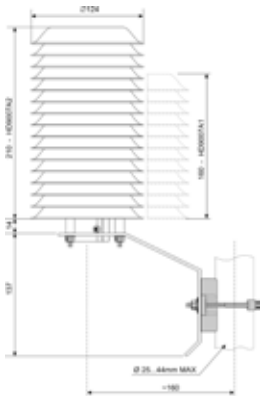

HUMIDITY TRANSDUCER



GRHU-1R-MP
Wall version

Standard version:
Probe length: 50 mm

GRHU-1K-MP
Wall / channel version

Standard version:
Probe length: 220 mm

GRHU-2K-MP
Channel version

Standard version:
Probe length: 220 mm

GRHU-SHUT-MP
absorption hat /
weather protection

GRHU-KABEL-MP
wall version with
cable and high
humidity sensor

GRHU-1R-MP

Art. no. 602938

GRHU-1K-MP

Art. no. 602941

GRHU-2K-MP

Art. no. 602943

GRHU-SHUT-MP

Art. no. 603953

GRHU-KABEL-MP

Art. no. 608043

General:

The humidity transducer offers even greater possibilities to compensate the special sensor characteristics due to the newest microprocessor technology. Regarding precision, temperature stability and functionality a new dimension is entered. The transducer can be used for almost all applications due to the different types (e.g. wall or channel mount, with separated probe or with heat absorption hat) and the wide temperature range (electronic: -25 °C ... +50 °C; sensor: -40 ... +120 °C).

Specifications:

Measuring ranges:

Humidity: 0.0 ... 100.0 % RH (temperature compensated)
Temperature: -40.0 ... 120.0 °C or -40.0 ... 248 °F

Recommended humidity range: 20.0 ... 80.0 % RH (standard)
5.0 ... 95.0 % RH (with option high humidity)

Display options: with option UNI an alternative display unit can be shown instead of the humidity measuring value. The unit selection will be done via keyboard.

Wet bulb temperature: -27.0 ... +60.0 °C
Dewpoint temperature: -40.0 ... +60.0 °C
Enthalpy: -25.0 ... 999.9 kJ/kg
Atmospheric humidity: 0.0 ... 640.0 g/kg
Absolute humidity: 0.0 ... 200.0 g/m³

Accuracy: (at 25 °C and in recommended range)

Display: humidity: ±2.5 % RH
temperature: ±0.4 % of measuring value ±0.2 °C

Output signal: ±0.2 % FS

Temperature compensation: automatically

Auxiliary energy: 12 ... 30 VDC or 18 ... 30 VDC (for output: 0 ... 10 V)

Reverse voltage protection: 50 V, permanently

Perm. impedance (at 4 ... 20 mA): $R_A [\Omega] \leq (U_v [V] - 12V) / 0.02 A$

Permissible load (at 0 ... 1(10)V): $R_L [\Omega] > 3000 \Omega$

Display: approx. 10 mm high, 4-digit LCD-display, alternating humidity and temperature display

Working temperature: -25 ... +50 °C (electronics)

Sensor head and tube: -40 ... +100 °C - for short time up to +120 °C

Storage temperature: -25 ... +70 °C

Relative humidity (electronic): 0 ... 95 % RH (non-condensing); If there is a risk of condensation due to temperature changes, please use our encapsulated or lacquered types (optionally available).

Housing: ABS (IP65)

Sensor tube: tube 14 mm Ø, with screw-type protection cap

Design type KABEL: with separated sensor tube, sensor head (Ø1 4x 68 mm) connected to device via 1 m teflon cable. Inclusive option high-humidity sensor

Design type SHUT: Heat protective shield / weather protective shield; **Application:** for highly precise outdoor measurements, strong solar radiation and rain; **Design:** Weather protective shield made of plastic, Ø 110 mm, heights approx. 140 mm. Wall mounting panel made of stainless steel with 3 mounting holes for screws with maximal shaft diameter 5 mm. Largest overhang 160 mm.

Electric connection: elbow-type plug acc. to EN 175301-803/A (IP65)

Mounting: 4 housing holes for wall mounting or by means of plastic tube clamps for duct mounting

Functions: min-/max-value memory, offset and slope adjustable, output signal scaleable

Accessories and spare parts:

VAW

Art. no. 610765

Mounting clip for VA-angle



GRHU - 1 - 2 - 3 - 4 - 5

Greisinger		
1.	Design type	
	1R-MP	Surface design
	1K-MP	Surface / duct design
	2K-MP	Duct design
	KABEL-MP	Surface design with cable and high humidity sensor
	SHUT-MP	Weather protective shield / heat-protective hat
2.	Options Sensor	
	...	Standard sensor
	-HO	High humidity sensor
3.	Fitting length EL	
	...	No installation length
	-050	50 mm
	-220	220 mm
	-300	300 mm
	-400	400 mm
	-500	500 mm
4.	Output signal	
	...	4 ... 20 mA
	-AV1	Analog output 0-10 V
	-AV01	Analog output 0-1 V
	-AV10G	0-10 V (3 or 4 pins)
5.	Option	
	-LACK	Encapsulated PC Board
	-UNI	Selectable humidity display instead of the standard humidity values

HUMIDITY- AND TEMPERATURE TRANSDUCER

2-CHANNEL HUMIDITY/
TEMPERATURE TRANSDUCER

GHTU-1R-MP
Wall version
Standard version:
Probe length: 50 mm

GHTU-1K-MP
Wall / channel version
Standard version:
Probe length: 220 mm

GHTU-2K-MP
Channel version
Standard version:
Probe length: 220 mm

GHTU-SHUT-MP
absorption hat /
weather protection

GHTU-KABEL-MP
wall version with
cable and high
humidity sensor

GHTU-1R-MP

Art. no. 602585

GHTU-1K-MP

Art. no. 602587

GHTU-2K-MP

Art. no. 602592

GHTU-SHUT-MP

Art. no. 603896

GHTU-KABEL-MP

Art. no. 604436

General:

The humidity & temperature transducer offers even greater possibilities to compensate the special sensor characteristics due to the newest microprocessor technology. Regarding precision, temperature stability and functionality a new dimension is entered. The transducer can be used for almost all applications due to the different types (e.g. wall or channel mount, with separated probe or with heat absorption hat) and the wide temperature range (electronic: -25 °C ... +50 °C; sensor: -40 ... +120 °C), 2 standard signal outputs.

Specifications:**Measuring ranges:**

Humidity: 0.0 ... 100.0 % RH (temperature compensated)
Temperature: -40.0 ... +120.0 °C or -40.0 ... +248 °F

Recommended humidity range: 20.0 ... 80.0 % RH (standard)
5.0 ... 95.0 % RH (with option high humidity)

Display options: with option UNI an alternative display unit can be shown instead of the humidity measuring value. The unit selection will be done via keyboard.

Wet bulb temperature: -27.0 ... +60.0 °C

Dewpoint temperature: -40.0 ... +60.0 °C

Enthalpy: -25.0 ... +999.9 kJ/kg

Atmospheric humidity: 0.0 ... 640.0 g/kg

Absolute humidity: 0.0 ... 200.0 g/m³

Accuracy: (at 25 °C and in recommended range)

Display: humidity: ±2.5 % RH
temperature: ±0.4 % of measuring value ±0.2 °C

Output signal: humidity ±0.2 % FS, temperature ±0.2 % FS

Temperature compensation: automatically

Auxiliary energy: 12 ... 30 VDC or 18 ... 30 VDC (for output: 0 ... 10V)

Reverse voltage protection: 50 V, permanently

Perm. impedance (at 4 ... 20 mA): $R_A [\Omega] \leq (U_v [V] - 12 V) / 0.02 A$

Permissible load (at 0 ... 1(10)V): $R_L [\Omega] > 3000 \Omega$

Display: approx. 10 mm high, 4-digit LCD-display, alternating humidity and temperature display

Working temperature: -25 ... +50 °C (electronics)

Sensor head and tube: -40 ... +100 °C - for short time up to 120 °C

Storage temperature: -25 ... +70 °C

Relative humidity (electronic): 0 ... 95 % RH (non-condensing); If there is a risk of condensation due to temperature changes, please use our encapsulated or lacquered types (optionally available).

Housing: ABS (IP65)

Sensor tube: tube 14 mm Ø, with screw-type protection cap

Design type KABEL:

with separated sensor tube, sensor head (Ø 14 x 68 mm) connected to device via 1 m teflon cable. Inclusive option high-humidity sensor

Design type SHUT:

Heat protective shield / weather protective shield
Application: for highly precise outdoor measurements, strong solar radiation and rain

Design: Weather protective shield made of plastic, Ø 110 mm, heights approx. 140 mm. Wall mounting panel made of stainless steel with 3 mounting holes for screws with maximal shaft diameter 5 mm. Largest overhang 160 mm.

Electric connection: elbow-type plug acc. to EN 175301-803/A (IP65)

Mounting: 4 housing holes for wall mounting or by means of plastic tube clamps for duct mounting

Functions: min-/max-value memory, offset and slope adjustable, output signal scaleable

Accessories and spare parts:**VAW**

Art. no. 610765

Mounting clip for VA-angle



GHTU - 1 - 2 - 3 - 4 - 5 - 6

Greisinger		
1.	Design type	
	1R-MP	Surface design
	1K-MP	Surface / duct design
	2K-MP	Duct design
	KABEL-MP	Surface design with cable and high humidity sensor
	SHUT-MP	Weather protective shield / heat-protective hat
2.	Fitting length EL	
	...	No installation length
	-050	50 mm
	-220	220 mm
	-300	300 mm
	-400	400 mm
	-500	500 mm
3.	Output signal	
	...	4 ... 20 mA
	-AV01	0-1 V
	-AV01G	0-1V (galvanically isolated)
	-AV10	0-10 V
	-AV10G	0-10 V (galvanically isolated)
4.	Options Sensor	
	...	Standard sensor
	-HO	High humidity sensor
5.	Option	
	-LACK	Encapsulated PC Board
6.	Option	
	-UNI	Selectable humidity display instead of the standard humidity values

TRANSMITTERS AND REGULATORS FOR HUMIDITY, TEMPERATURE AND CO₂

HIGHLIGHTS:

- Indoor air quality permitting automatic ventilation rate by CO₂ analysis correlate to the real presence of people in the rooms



HD46... series



HD45... series

AIR QUALITY

other design types upon request

HD46-17B-DT-RHumidity, Temperature and CO₂ with display and 3 x relay output**HD46-17B-DT-A**Humidity, Temperature and CO₂ with display and 3 x 4 ... 20 mA output**HD45-B-0-R**Only CO₂ without display (just indicator) and 1 x relay output
other design types upon request**General:**

The instruments of the series HD45 and HD46 are transmitters, indicators and regulators, to measure and control, depending on the model, the following environmental parameters:

- Relative humidity (RH)
- Ambient temperature (T)
- Carbon dioxide (CO₂)
- Dew point temperature (DP, calculated measurement)

They are suitable for monitoring indoor air quality. A typical application is the examination of air quality in: buildings where there is crowding of people (schools, hospitals, auditoriums, cafeterias, etc.); workplaces to optimize comfort and in general to see if there are small losses CO which may cause explosions or fire. This analysis allows the adjustment of air conditioning (temperature and humidity) and ventilation (changes air/hour) in order to achieve a twofold objective. The instruments are factory calibrated and require no further adjustment by the installer. The instruments are wall mounted and their sensors are installed inside the housing. The temperature T is measured with a high precision NTC sensor. The measurement of CO₂ (carbon dioxide) is obtained with a special infrared sensor (NDIR technology: Non-Dispersive Infrared Technology), which, by using a double filter and a particular measurement technique, ensures accurate measurements and stable measurements over time. The presence of a protective membrane, which is spread through the air portion, protects the sensor from dust and weather. The instrument can be wall mounted and sensors are internal to the instrument.

The measurement of RH (Relative Humidity) is obtained with a capacitive sensor.

All models perform continuous measure storing and data can be downloaded on a PC.

Specifications:

Measuring frequency:	1 sample every 3 s
Storage capacity:	2.304 records
Serial output:	Serial output for USB (mini-USB/USB cable with adapter cod. RS45I)
Analog output:	4 ... 20 mA (RL MAX = 400 Ω) (only HD45_A and HD46_A)
Relay output:	Two-state (only HD45 ... R and HD46 ... R) Contact: max 1 A @ 30 V dc resistive load
Power supply:	24 V AC ±10 % (50 ... 60 Hz) or 15 ... 35 V DC
Power consumption:	100 mW (except of the models with current output) 400 mW (for the models with current output)
Stabilizing time:	15 min (to guarantee the declared accuracy)
Working temperature of the instrument:	0 ... 50 °C
Working humidity of the instrument:	0 ... 90 % RH no condensate
Dimensions:	34 x 80 x 80 mm (HD45-B-Blank) (H x W x D) 34 x 80 x 120 mm (HD46.17B...) (H x W x D)
Housing material:	ABS
Protection degree:	IP30
Scope of supply:	Device, manual

Relative humidity RH

Sensor:	Capacitive
Measuring ranges:	0 ... 100 % RH, -40 ... +85 °C Dew point Td

Working range of the sensor:	-40 ... +80 °C
Accuracy:	±1.5 % RH (0 ... 90 % RH) ±2 % RH (elsewhere) for T=15 ... 35 °C ±(1.5 + 1.5 % of the measure) % RH for T=40 ... +80 °C
Resolution:	0.1 %
Temperature dependence:	2 % on the whole temperature range
Hysteresis and repeatability:	1 % RH
Response time (T₉₀):	<20 s (air speed = 2 m/s and stable temperature)

Temperature T

Sensor type:	NTC 10 kΩ
Measuring ranges:	-30 ... +85 °C (-22 ... +185 °F)
Accuracy (except for models with current outputs):	±0.2 °C ±0.15 % of the measured value within 0 ... 70 °C ±0.3 °C ±0.15 % of the measured value within -30 ... 0 °C and 70 ... 85 °C
Accuracy (for models with 4 ... 20 mA):	±0.5 °C ±0.15 % of the measured value within -30 ... +85 °C
Resolution:	0.1 °C
Response time (T₉₀):	<30 s (air speed = 2 m/s)

Carbon dioxide (CO₂)

Sensor:	Dual wavelength NDIR (2 frequencies)
Measuring ranges:	0 ... 5.000 ppm
Working range of the sensor:	0 ... 50 °C
Accuracy:	±50 ppm +3 % of the measured value) @ 20 °C and 1013 hPa
Resolution:	1 ppm
Temperature dependence:	0.1 % f.s./°C
Response time (T₉₀):	<120 s (air speed = 2 m/s and stable temperature)

Configuration:

The instruments are equipped with serial output easily accessible on the side of the instrument that allows you to connect to the USB port of your PC via the cable RS45-0 or RS45-I with built-in adapter, for custom configurations. With the RS45-0 cable the instrument is powered directly from the USB port of your PC, thus allowing the configuration of the instrument in the field using a laptop before installing fixed.

Accessories:**DeltaLog14**

Software for connecting to the PC via the serial output, for the configuration of the instrument and data download. For Windows® operating systems.

RS45-0

Not isolated serial connection cable with built-in adapter. USB connector for PC and mini-USB connector for the serial port of the instrument. The cable powers the instrument.

RS45-I

Isolated serial connection cable with built-in adapter. USB connector for PC and mini-USB connector for the serial port of the instrument. The cable does not power the instrument.

HD45-TCAL

The Kit includes the RS45 cable with built-in adapter and the CD-ROM with the DeltaLog14 software for Windows operating systems. The cable is provided with USB connector on the PC side and mini-USB connector for the serial port of the instrument.

Important information:

RS45-... and DeltaLog14 are necessary for configuration.
Models of the series HD46-... can be equipped with keyboard that allows you to easily configure the instrument even without a PC connection.

PRESSURE MEASURING TRANSDUCER FOR ABSOLUTE PRESSURE OR OVER / UNDER PRESSURE AND PRESSURE DIFFERENCE



FREELY SCALABLE



absolute pressure connection

HIGHLIGHTS:

- Change between 4 ... 20 mA / 0 ... 10 V
- With display
- Switching output
- Configuration protected by code lock

GMUD-MP - S

Pressure measuring transducer for pressure difference or absolute pressure (pressure range >25 mbar)

GMUD-MP - F

Pressure measuring transducer for pressure difference (fine pressure range ≤25 mbar)

General:

Microprocessor controlled, digital pressure transducer with display and operation via 3 buttons. With freely scalable analog output that can be switched between 4 ... 20 mA and 0 ... 10 V. Code lock for input, after code input parameters can be changed (code permanently stored).

Application:

For air and non-aggressive gases

Area of application:

controlling, measuring and monitoring, climate and ventilation, environmental and medical technology

Measuring ranges:

Difference fine pressure range:

GMUD MP-F-MR0: Art. no. 602483	Measuring range: 0.000 ... 1.000 mbar Overload: 250 mbar, Burst pressure: 500 mbar
GMUD MP-F-MR1: Art. no. 602485	Measuring range: 0.00 ... 10.00 mbar Overload: 150 mbar, Burst pressure: 200 mbar
GMUD MP-F-MR2: Art. no. 602487	Measuring range: 0.00 ... 20.00 mbar Overload: 150 mbar, Burst pressure: 200 mbar
GMUD-MP-F-MR3: Art. no. 605958	Measuring range: -1.999 ... +2.500 mbar Overload: 250 mbar, Burst pressure: 500 mbar
GMUD-MP-F-MR4: Art. no. 604355	Measuring range: -19.99 ... +20.00 mbar Overload: 150 mbar, Burst pressure: 200 mbar

Difference pressure range:

GMUD MP-S-MR0: Art. no. 602482	Measuring range: 0.0 ... 100.0 mbar Overload: 1000 mbar, Burst pressure: 1500 mbar
GMUD MP-S-MR1: Art. no. 602491	Measuring range: 0.0 ... 500.0 mbar Overload: 1000 mbar, Burst pressure: 1500 mbar
GMUD MP-S-MR2: Art. no. 602493	Measuring range: 0 ... 1000 mbar Overload: 2000 mbar, Burst pressure: 3000 mbar
GMUD MP-S-MR3: Art. no. 602495	Measuring range: 0 ... 2000 mbar Overload: 4000 mbar, Burst pressure: 6000 mbar
GMUD MP-S-MR4: Art. no. 602497	Measuring range: 0 ... 5000 mbar Overload: 7000 mbar, Burst pressure: 7000 mbar
GMUD-MP-S-MR5 Art. no. 607278	Measuring range: -100.0 ... +100.0 mbar Overload: 1000 mbar, Burst pressure: 1500 mbar
GMUD-MP-S-MR6 Art. no. 607925	Measuring range: -500 ... +500 mbar Overload: 1000 mbar, Burst pressure: 1500 mbar
GMUD-MP-S-MR7 Art. no. 607252	Measuring range: -1000 ... +1000 mbar Overload: 2000 mbar, Burst pressure: 3000 mbar

Absolute pressure range:

GMUD MP-S-MA0: Art. no. 602499	Measuring range: 0 ... 1100 mbar abs. Overload: 2000 mbar, Burst pressure: 3000 mbar
GMUD MP-S-MA1: Art. no. 602501	Measuring range: 0 ... 2000 mbar abs. Overload: 4000 mbar, Burst pressure: 6000 mbar

Types of pressure:

Absolute pressure is the pressure related to vacuum (zero pressure). When no pressure is applied (pressure port open), the ambient pressure is displayed.

Examples: meteorological measurements (eg 1013 hPa abs), vacuum processes

Differential pressure is the pressure difference between 2 press. Mostly both pressures are connected to a respective side of the measuring membrane, the sensor must have two pressure connections.

Examples: ventilation technology / filters, dynamic pressure measurements

The **relative pressure** is the pressure difference between a pressure / vacuum and the ambient pressure. For relative pressure measurement with a differential pressure sensor (2 pressure ports) one of the terminals is left open.

Examples: pneumatic, tire pressure, hydraulic

Specifications:

Sensor element:	piezoresistive pressure sensor with integrated temperature
Typ. accuracy:	depends on type (see manual) ±0.15 % (linearity) ±0.6 % FS (hysteresis and temperature 0 ... 70 °C)
Output signal:	4 ... 20 mA / 0 ... 10 V (selectable in menu)
Auxiliary energy:	only needed if 0 ... 10 V output signal is selected (18 ... 30 V DC)
Permissible burden:	(4 ... 20 mA): $R_L [Ω] ≤ (U_V [V] - 12 [V]) / 0.02 A$
Permissible load:	(0 ... 10 V): ≥3000 Ω
Betriebstemperatur:	-20 ... +70 °C
Storage temperature:	-40 ... +70 °C
Display / Operation:	4-digit 7-segment display and 3 buttons
Display range:	-1999 ... 9999 digit
Pressure connection:	universal pressure connecting pieces for 6 x 1 mm or 8 x 1 mm plastic tubes (4 or 6 mm inner pipe diameter)
Mounting position:	any position (small influence of mounting position for low ranges)
Housing:	ABS (IP65): with fixing holes for wall mounting (accessible after cover has been removed)
Dimensions:	Housing 80 x 82 x 55 mm (without elbow-plug and pressure connecting pieces)
Electric connection:	Elbow-type plug acc. to EN 175301-803/A (IP65) max. wire cross section: 1.5 mm ² , wire / cable Ø: 4.5 ... 7 mm
Scope of supply:	Device, calibration protocol, manual

Option:

LACK

card coated on both sides for outdoor application

OUT

SSwitching output (max 28 V, 40 mA), switches if meas. Value falls below or exceeds limit value connection via 2nd elbow-type plug

WE

Default settings according to customer's specifications, includes: output signal, measuring range, default state in case of error (without upcharge if together with MBF / MBS)

MBF

Option any fine pressure range ≤25 mbar, please state desired measuring range


MBS

Option any pressure range >25 mbar ... 5000 mbar, please state desired measuring range

Accessories and spare parts:

Tube and accessories: see page 86.

PRESSURE TRANSMITTER

**A10**

Pressure transmitter (relative pressure, zero output at atmospheric pressure)

Application:

Suitable for all applications in machine and systems engineering, automotive technology as well as cooling and air conditioning technology.

Specifications:**Measuring range (MR), Overload limit (OL), Burst pressure (BP):**

MB:	1, 40,	1.6, 60,	2.5, 100,	4, 160,	6, 250,	10, 400,	16, 600,	25,
ÜL:	2, 80,	3.2, 120,	5, 200,	8, 320,	12, 500,	20, 800,	32, 1200,	50,
BD:	5, 400,	10, 550,	10, 800,	17, 1000,	34, 1200,	34, 1700,	100, 2400,	100,

Output signal: 4 ... 20 mA, 2-wire, $R_A [Ω] < (U_V [V] - 8V) / 0.02 A$
0 ... 10 V, 3-wire, $R_L > 10 kΩ$ (other output signals upon request)

Auxiliary energy U_V : 8 ... 30 V DC (for output 4 ... 20 mA)
14 ... 30 V DC (for output 0 ... 10 V)

Accuracy: * ≤1.0 % FS (optional: ≤0.5 % FS)
* = including non-linearity, hysteresis, zero point and scale error. Corresponds to error of measurement per IEC 61298-2. Sensor adjusted in vertical mounting position with lower pressure connection.

Non-Linearity: ≤0.5 % FS (optional: ≤0.25 % FS)
Zero Offset: ≤0.5 % FS (typ.), ≤0.8 % FS (max.),
(Optional: ≤0.15 % FS (typ.), ≤0.4 % FS (max.))

Hysteresis: ≤0.16 % FS
Repeatability: ≤0.1 % FS
Long-term drift: ≤0.1 % FS (according to IEC 61298-3)

Response time: T_{90} ≤4 ms
Permitted temperature of measurement media: 0 ... +80 °C (optional: -30 ... +100 °C)

Ambient temperature: 0 ... +80 °C (optional: -20 ... +100 °C)

Storage temperature: -20 ... +80 °C

Temperature compensated area: 0 ... +80 °C
Temperature error in compensated area: ≤1.0 % FS (typ.), ≤2.5 % FS (max.)

Material: Parts coming into contact with pres. media

Pressure connection: 316 L

Pressure sensor: 316 L (as of 10 bar rel. 13 ... 8 PH)

Housing: 316 L

Pressure connection: G 1/4 A, DIN 3852-E with NBR sealing

Protection rating: IP65 or IP67 with cable

Electric connection: elbow-type plug acc. to EN 175301-803/A or connection cable, cable length 2 m

Electric protections: reverse voltage and short-circuit protection

Weight: approx. 80 g

Options:

Absolute pressure
(0 ... 1 bar abs. to 0 ... 25 bar abs.)

Under pressure
(-1.0 ... +1.5 bar, -1.0 ... +3.0 bar, -1.0 ... +9.0 bar)

G2
Higher sensor accuracy (class 0.5)

T2
Extended temperature range: -30 ... +100 °C

V2
Output signal 0 ... 10 V

Fixed connecting cable
2 m with bend protection (instead of elbow-type plug, protection rating: IP67)

PRESSURE MEASURING TRANSDUCER
FOR OVER/UNDER AND ABSOLUTE PRESSURE

S10



S11



S20

**S10 REL**

Pressure measuring transducer (Standard, zero output at ambient pressure)

S11 REL

Pressure measuring transducer (Flush, zero output at ambient pressure)

S20 REL

Pressure measuring transducer (Standard, zero output at ambient pressure)

S10 ABS

Pressure measuring transducer (Standard, absolute, zero output at vacuum)

S11 ABS

Pressure measuring transducer (Flush, absolute, zero output at vacuum)

S20 ABS

Pressure measuring transducer (Standard, absolute, zero output at vacuum)

General:

Piezoresistive pressure sensor with temperature compensation. Completely welded and stainless steel design, filled food safe (up to 16 bar), thin film strain (above 25 bar).

Specifications:

Measuring ranges: in bar (other values upon request)

S10 / S11 REL: 0,1, 0,16, 0,25,

S11 / S20 REL: 0,4, 0,6, 1, 1,6, 2,5, 4, 6, 10, 16, 25, 40, 60, 100, 160, 250, 400, 600,
S20 REL only: 1000, 1600

S10 / S11 ABS: 0,25,

S11 / S20 ABS: 0,4, 0,6, 1, 1,6, 2,5, 4, 6, 10, 16, **S20 ABS only:** 20, 40

S10 ABS: 0,8 ... 1,2,

Available overload pressure limits: 3-fold at measuring range <10 bar (150 psi)
2-fold at measuring range ≥10 bar (150 psi)

Output signal: 4 ... 20 mA (0 ... 10 V - refer to options; others upon request)

Permissible impedance: $R_A [Ω] ≤ (U_V [V] - 10 V) / 0.02 A$ (for output 4 ... 20 mA)

Permissible load: $R_L > 10 kΩ$ (for output 0 ... 10 V)

Auxiliary energy: 10 ... 30 V DC (14 ... 30 V DC for output 0 ... 10 V)

Accuracy:

deviation from parameter (% of Span): ≤0.5 (setting of cut-off point)
≤0.25 (setting of tolerance band, BFSL)

Repeatability (% of Span): ≤0.1 %

Stability/year (% of Span): ≤0.2 (at reference conditions)

Hysteresis (% of Span): ≤0.1

Permissible temperature of media: -30 ... +100 °C (refer to options)

Operating temperature ambient: -30 ... +100 °C

Compensated temperature range: 0 ... +80 °C

Temperature coefficient: ≤0.02 % FS / K (or ≤0.04 % FS for MB ≤0.25 bar)

Housing: stainless steel 1.4435 (IP65)

Pressure connection: (other upon request)

Type S10 / 20...: G 1/2 B, other upon request

Type S11...: G 1 B (up to 1.6 bar), G 1/2 B (from 2.5 ... 600 bar)

Mounting position: any

Electric connection: standard via elbow-type plug EN 175301-803/A

Electric protections: reverse voltage protection, over voltage and short-circuit

Options:**Special measuring range**

Media temperature: -40 ... +125 °C (S10 / 20 only)

Media temperature: -30 ... +125 °C (S11 only)

Media temperature: -20 ... +150 °C
(S-11 only with cooling section)

Output signal 0 ... 10 V
(other upon request)

Ex-protection

upon request

WATER LEVEL / WELL PROBE TANK CONTENTS MEASURING PROBE



FOR SIMPLE AND INEXPENSIVE APPLICATIONS

GBS 01

Art. no. 603059

Water level / well probe

Application:

Suitable for permanent level measuring in tanks, rivers, lakes, drinking-water wells, drilling holes, waste water plants...

GBS 02

Art. no. 603146

Tank contents measuring probe for difficult measuring conditions

General:

Piezoresistive pressure sensor with temperature compensation. Welded, non-corrosive design with integral and additionally sealed water-proof connecting cable. The pressure compensation is done via a cable-integrated air path to the atmosphere. A special feature of GBS 02 is the lateral flow resistance, which prevents media ingress.

Application:

For measuring the level of fuel and other aggressive media. The sensor is highly precise, insensitive to lateral flow and offers optionally lightning protection and other output signals (e.g. 0 ... 10 V). For measuring of gasoline please order Ex-design.

Specifications:

Measuring ranges: 0.1 bar (100 mbar) ... 10 bar = 1 ... 100 m water column

Available ranges: 0.1, 0.25, 0.4, 0.6, 1, 1.6, 2.5, 4, 6, 10

Overload (bar): 1 2 2 3 5 8 8 10 10 10

Output signal: 4 ... 20 mA (option: 0 ... 10 V only for GBS 02)

Permissible impedance: 4 ... 20 mA: $R_A [\Omega] < (U_v [V] - 10 V) / 0.02 A$

Permissible load: 0 ... 10 V: $R_L [\Omega] > 100 k\Omega$

Auxiliary energy: 10 ... 30 V DC (14 ... 30 V DC at 0 ... 10 V)

Accuracy: accuracy (% of span):

GBS 01: ≤ 0.5 setting of cut-off point) resp. ≤ 0.25 (BFSL)

GBS 02: accuracy (% of span): ≤ 0.25 (setting of cut-off point) resp. ≤ 0.125 (BFSL); (at 0.1 bar: ≤ 0.5 setting of cut-off point) resp. ≤ 0.25 (BFSL)

Hysteresis (% of span): ≤ 0.1

Repeatability (% of span): ≤ 0.05

Stability per year (% of span): ≤ 0.2 (at reference conditions)

Operating temperature: -10 ... +50 °C (GBS 01) or -10 ... +85 °C (GBS 02)

Temperature coefficient (% of span): $\leq 0.02 / K$ (for meas. range > 0.4 bar)

Filling: KN77, food safe

Housing: chromium-nickel alloy 1.4571. Male thread G 1/2" accessible after removal of plastic protection cap.

Probe dimensions: $\varnothing 27$ mm, length of metal body: approx. 100 mm (GBS 01), approx. 147 mm (GBS 02), cable $\varnothing$ approx. 7.5 mm

Connection: 10 m stationary casted PUR cable (GBS 01) resp. FEP-cable (GBS 02), loose ends. Glass-fibre screen protects cable against tearing. (Extra long cable against upcharge - please specify when ordering)

Options GBS 01:

extra long connection cable (PUR)
till max. 300 m

Options GBS 02:

extra long connection cable (FEP, teflon)
till max. 100 m

Output signal 0 ... 10 V

Lightning protection, Ex-protection, meas. range 16 and 25 bar

INLINE COMPRESSED AIR FLOWMETER FOR COMPRESSED AIR CONSUMPTION MEASUREMENTS



GEE 771C-DN15

Art. no. 602917

Flowmeter with DN15 sensor and assembly ball valve DN15

GEE 771C-DN20

Art. no. 602918

Flowmeter with DN20 sensor and assembly ball valve DN20

GEE 771C-DN25

Art. no. 602919

Flowmeter with DN25 sensor and assembly ball valve DN25

General:

The inline flowmeter is based on the thermal mass flow measuring principle and is well suited for flow measurements in pipes DN15 till DN25. It allows measuring the consumption of compressed air (optionally also nitrogen, CO₂, oxygen, helium or other non-corrosive, incombustible gases).

The device sets standards in terms of accuracy and repeatability, its unique mounting concept as well as its close-to-application adjustment at a pressure of 7 bar.

The mounting in a measurement assembly ensures easy installation and removal of the sensor for regular calibration and assures at the same time an exact and reproducible positioning of the flow sensor in the pipe. There are two signal outputs to read-out the measured values. Depending on the application the outputs can be configured as analog output (current or voltage), switching output or pulse output for consumption measurement.

Configuration software

The flow meter can be configured to its desired use by means of its integrated USB interface and a software included in shipping.

Functions of the software:

- configuration of outputs (range / switching points)
- 2 point adjustment for flow and temperature
- read-out of consumption meter
- reset of min-/max- values and consumption meter

Application:

Leakage detection: Consumption of compressed air despite of shut-down installations is a serious hint for a leak in one of the pipes (even a 1.5 mm sized hole can already yet energy costs of € 1.500!)

Improvement in efficiency: Compressed air is one of the most expensive form of energy in many plants! Therefore the knowledge about the consumption is essential for the application of an energy management system (e.g. acc. to DIN50001)

Specifications:

Measuring unit: Volume flow acc. to DIN1343

Measuring ranges: DN15: 0.32 ... 63 Nm³/h
DN20: 0.57 ... 113 Nm³/h
DN25: 0.90 ... 176 Nm³/h

Meas. range temperature: -20 ... +80 °C

Output 1: Analog output 0(4) ... 20 mA or 0 ... 10 V

Output 2: Pulse output or switching output

Voltage supply: 18 ... 30 V AC/DC, max. 200 mA

Working temperature: -20 ... +60 °C

Media temperature: -20 ... +80 °C

Working pressure: max. 16 bar

Accessories and spare parts:

GEE-KH-DN15

Art. no. 604559

Assembly ball valve DN15

GEE-KH-DN20

Art. no. 604560

Assembly ball valve DN20

GEE-KH-DN25

Art. no. 607966

Assembly ball valve DN25

GEE-AK-2m

Art. no. 607967

Connection cable transmitter $\leftrightarrow$ sensor, 2 m

AIR SPEED TRANSMITTERS



HD29-0-3-T01

HD29-0-3-TC1-2

HIGHLIGHTS:

- For air conditioning HVAC
- For calculation of outdoor air exchange
- For evaluating the frequency of renewal of air
- For airflow duct control
- For actuators (ventilation rate)

other design types upon request

HD29-0-3-T01

Art. no. 609883

Air speed transmitter, sensor length 150 mm

Combined with temperature and humidity, other cable lengths, probe lengths or output 0 ... 10 V upon request

HD29-0-3-TC1-2

Art. no. 609884

Air speed transmitter, sensor length 250 mm, cable length 2 m

Combined with temperature and humidity, other cable lengths, probe lengths or output 0 ... 10 V upon request

General:

The HD29-0-3-T... is employed in the control of air speed in the air conditioning and ventilation (HVAC / BEMS) in the pharmaceutical, museum, clean rooms, ventilation ducts, industrial sectors and households, crowded places, cafeterias, auditoriums, gymnasiums or on farms with large numbers of animals. The sensors in combination with an accurate electronics guarantee precise and reliable measurements in the time.

Common technical specifications:

Air speed measuring range:	0.05 ... 1 m/s 0.1 ... 2 m/s 0.20 ... 10 m/s 0.20 ... 20 m/s	Notes: The measuring range can be selected by dip-switch.
----------------------------	---	--

Air speed accuracy range 0 ... 1 m/s	±(0.1 m/s + 3 % of measurement)	at 50 % RH and 1.013 hPa
range 0 ... 2 m/s	±(0.15 m/s + 3 % of measurement)	
range 0 ... 10 m/s	±(0.5 m/s + 3 % of measurement)	
range 0 ... 20 m/s	±(0.7 m/s + 3 % of measurement)	

Output:	4 ... 20 mA	R _L < 500 Ω
---------	-------------	------------------------

Power supply:	16 ... 40 V DC or 12 ... 24 V AC ±10 %
---------------	--

Response time:	0.2 s	Fast
(selected by jumper)	2.0 s	Slow

Operating temperature electronics	0 ... +60 °C
probe	-10 ... +80 °C

Storage temperature:	-10 ... +70 °C
----------------------	----------------

Protection class:	IP67
-------------------	------

Sensor working conditions:	clean air, RH < 80 %
----------------------------	----------------------

Case dimensions:	80 x 84 x 44 mm	without probe
------------------	-----------------	---------------

Installation notes:


- To fix the probe inside a ventilation duct, a pipe, etc. you can use a PG16-12 metal cable gland (Ø 10 ... 14 mm) or a 3/8" universal biconical connection.
- The transmitters are factory calibrated and no further adjustments are required.
- To select the air speed output range use the dual dip-switch on the board

Accessories:

PG16-12

Art. no. 700081


Metal gland PG16 for probes Ø 12 mm




PG16-12 metal cable gland
D = 10 ... 14 mm
L = 6.5 mm
H = 23 mm
A = PG 16



PG16-12

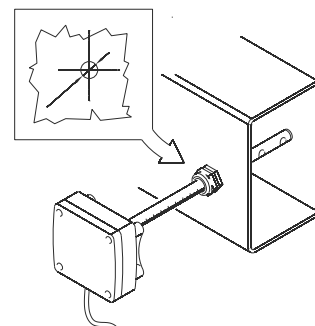

Probe dimensions:

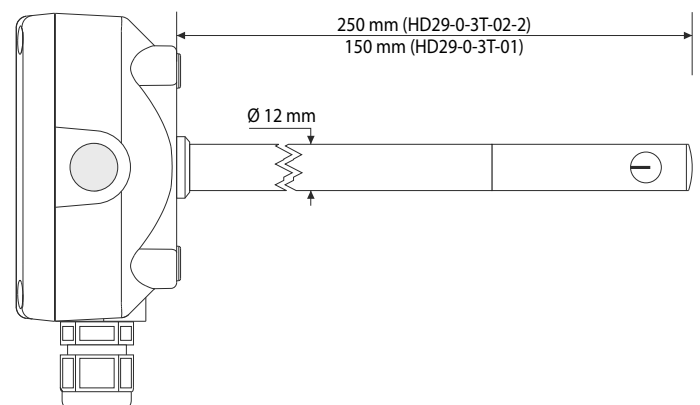

MINIATURE AIR VELOCITY TRANSMITTER



GSMU 671

Art. no. 608997

Miniature air velocity transmitter

General:

The GSMU 671 measuring transducer is a compact rod-type flow probe for HVAC applications. The integrated flow sensor is a high-quality thin film sensor element of the latest generation - based on the hot film anemometer principle in combination with state-of-the-art transfer moulding technology.

Application:

- heating, ventilating
- air conditioning technology
- supply air control of ovens

Specifications:

Measuring ranges:	0 ... 20 m/s, others (0 ... 5 m/s, 0 ... 10 m/s, 0 ... 15 m/s) upon request
Output signal:	0 ... 10 V
Accuracy:	+0,4 m/s +6 % of measured value (at 20 °C, 45 % RH, 1013 hPa and 1 ... 20 m/s)
Response time (T₉₀):	typ. 4 s
Power supply:	10 ... 29 V DC
Power consumption:	max. 70 mA (at 20 m/s)
Working conditions:	-20 ... +60 °C, 5 ... 95 % RH (non condensing)
Storage temperature:	-30 ... +60 °C
Connection:	0.5 m cable, PVC, 5 x 0.25 mm ² , wire end ferrule
Housing:	Polycarbonate, length: 130 mm, Ø 12 mm
Protection class:	IP50 (measuring head), IP54 (housing)

Accessories and spare parts:

GNG 24/150

Art. no. 600275

Power supply: 24 V DC, 150 mA

CO₂-TRANSDUCER

MAXALARM

MIN MAX



HIGHLIGHTS:

- excellent long term stability
- auto-calibration procedure
- for surveillance of the recommended CO₂ concentration in ambient air
- output signal free scaleable

GT10-CO2-1R

Art. no. 602599

CO₂-Transducer

General:

Due to the fact, that CO₂ is an important indicator for the quality of air in rooms, it's super important to measure the CO₂ content. The recommended CO₂ limit value for ambient air is 1000 ppm. An exceeding of this limit causes tiredness and a loss of concentration. The high quality and precise CO₂-transducer works according to the infrared principle (NDIR). An auto-calibration procedure compensates aging effects and is responsible for an excellent long term stability of this CO₂ transducer. Due to the freely adjustable output signal the transmitter could be used for nearly each existing controller input etc. Additionally, there is a local display which shows beside the actual CO₂ concentration, the minimum and maximum values as well as an optical alarm.

Specifications:

Measuring ranges:	Standard: 0 ... 2000 ppm CO ₂ (carbon dioxide) Optional: 0 ... 5000 ppm CO ₂ (carbon dioxide)
Measuring principle:	infrared principle (NDIR)
Accuracy:	standard: ±50 ppm ±2 % of meas. value (at 20 °C, 1023 mbar) opt. /5000: ±50 ppm ±3 % of meas. value (at 20 °C, 1023 mbar)
Output signal:	4 ... 20 mA (3-wire), standard 0 ... 1 V or 0 ... 10 V (3-wire), upon upcharge
Output scaling:	free scaleable, by entering display range
Auxiliary energy:	12 ... 30 V DC, max. 600 mA (at option 0 ... 10 V: 18 ... 30 V DC, max. 600 mA)
Permissible burden (at 4 ... 20 mA):	R _k <200 Ω
Perm. load (at 0-...Volt):	R _L >3000 Ω
Display:	approx. 10 mm high, 4-digit LC-display
Working condition:	-10 ... +50 °C, 5 ... 95 % RH, 850 ... 1100 hPa
Storage condition:	-25 ... +60 °C, 5 ... 95 % RH, 700 ... 1100 hPa
Electric connection:	elbow-type plug acc. to EN 175301-803/A (IP65), max. wire cross section: 1.5 mm ² , wire diameter from 4.5 ... 7 mm
Housing:	ABS, 82 x 80 x 55 mm (without elbow-type plug)
Mounting:	with fixing holes for wall mounting
Mounting distance:	70 x 50 mm (W x H)
Fixing screws:	max. shaft-Ø 4 mm
Weight:	approx. 225 g
Features:	min-/max-value memory, optical alarm, input of offset and scale for adjusting

Option:

MB2:

Measuring ranges: 0 ... 5000 ppm CO₂

AV01:

Output signal 0 ... 1 V

AV010:

Output signal 0 ... 10 V

Accessories and spare parts:

GSN 24-750

Art. no. 604387

Plug-in power supply (230 V AC => 24 V DC / 750 mA)

AIR OXYGEN MEASURING TRANSDUCER



pic. sensor GGO



pic. sensor GOO

**OXY 3690 MP**

Art. no. 602027

Air oxygen measuring transducer incl. sensor; For protective gases with a high O₂ concentration and oxygen content <35 vol.% O₂ (GOEL 370)

OXY 3690 MP-LO

Art. no. 602139

Air oxygen measuring transducer incl. sensor; For protective gases in general, precise even with very low measurements (e.g. <0.5 vol. % O₂) and above 35 vol.% O₂ (GOEL 381)

Specifications:**Measuring ranges:**

Oxygen concentration: 0.0 ... 100.0 % O₂ (gaseous)
OXY 3690 MP: recommended range 0.2 ... 35.0 vol.% O₂ (reduced precision outside)
OXY 3690 MP-LO: also suitable for values ≤0.2 vol.% O₂

Temperature: -20.0 ... 50.0 °C

Accuracy device (at nominal temperature 25 °C):

Oxygen: ±0.1 % ±1 digit

Temperature: ±0.1 °C ±1 digit

Output signal (O₂ only): 4 ... 20 mA (2-wire - standard), 0 ... 10 V (3-wire - option)

Electric isolation: input electrically isolated

Auxiliary energy: 12 ... 30 V DC (at output 4 ... 20 mA)
 18 ... 30 V DC (at output 0 ... 10 V - option)

Perm. impedance (at 4 ... 20 mA): R_A [Ω] ≤ (U_V [V] - 12 V) / 0.02 A

Permissible load (at 0 ... 10 Volt): R_L >3000 Ω

Working condition: 0 ... +50 °C, 0 ... 95 % RH (non-condensing)

Storage temperature: -20 ... +70 °C

Reverse voltage protection: 50 V permanently

Display: approx. 10 mm high, 4-digit LCD-display

Housing: ABS (IP65 - with the exception of sensor plug)

Dimensions: 82 x 80 x 55 mm (without elbow-type plug and sensor plug)

Electric connection: elbow-type plug acc. to EN 175301-803/A (IP65), max. wire cross section: 1.5 mm², wire diameter from 4.5 ... 7 mm

Sensor connection: 5-pin jack connector, screwable

Calibration: 1-point calibration in atmospheric air

Air pressure compensation: 500 ... 2000 hPa abs., manually input

Oxygen sensor:

Sensor type: depending on the version, see above

Measuring ranges: 0.0 ... 100.0 % O₂

Response time T₉₀: <10 s, depending on temperature

Warranty: 12 months (assuming appropriate usage according to the manual)

Application area: suitable for air and pure oxygen, protective gases

Temperature compensation: integrated in sensor housing

Connection cable: approx. 1.3 m, with 5-pin plug, screwable

Operating pressure: 500 ... 2000 hPa (static).

For air and gas-stream use the option GOO.../MU.

Working condition: 0 ... +45 °C, 0 ... +95 % RH (non-condensing)

Storage temperature: -15 ... +60 °C

Dimensions of housing: approx. Ø 40 x 103 mm (153 mm incl. anti-buckling glanding), housing with M16x1-screw thread (sensor can be connected to line tubes by means of an included adapter piece)

Weight: approx. 135 g

Option:

AV010:
Output signal 0 ... 10 V

GOO:
Oxygen sensor, open sensor type, suitable for air and gas-stream. (further information p.r.t. page 77)

KL10:
Sensor connection cable 10 m

LO:
Design type for fast measurements of low oxygen contents (0 ... 25 %) with sensor element GOEL 381

Accessories and spare parts:**GOEL 370**

Art. no. 601490

Spare sensor element

GOEL 381

Art. no. 610035

Spare sensor element

OXY3690MP - 1 - 2 - 3 - 4 - 5

Greisinger		
1.	O ² -sensor-element	
	0	GOEL 370, protection gases with higher CO ₂ concentrations and O ₂ concentrations below < 35 Vol. % O ₂
	2	GOEL 381, precise measuring at low O ₂ (e.g. <0.5 Vol. % O ₂ or concentrations above 35 Vol. % O ₂)
2.	Sensor design	
	-GGO	Closed sensor
	-GOO	Open sensor design
3.	Output signal	
	-A1	4-20 mA (2-wire)
	-V2	0-10 V
4.	Measuring range	
	...	0.0 ... 100.0 % O ₂ , recommended measuring range 0.2 ... 35.0 Vol. O ₂ (beyond reduced precision)
	-LO	0.0 ... 100.0 % Vol. O ₂ (also for values ≤0.2 % Vol. O ₂)
5.	Cable length	
	-L01	1.3 m
	-L04	4 m
	-L10	10 m

CONDUCTIVITY MEASURING TRANSDUCER



HIGHLIGHTS:

- Compact measuring cells
- Freely scalable
- Adjustable cell constant
- Local display
- Integrated temperature compensation
- Measuring cell included, pre-adjusted

Optional PG (with PG 13.5 thread)
up to 6 bar (@ 22 °C)
Standard cable length: 1 m

Laboratory measuring cells
best value
Standard cable length: 1 m

Professional, field installation M12,
G 1/2 A fitting, max. 16 bar (@ 22 °C)
Standard cable length: 5 m

GLMU 200 MP-TR

Conductivity measuring transducer,
incl. 2-pole measuring cell

General:

2-pole measuring cells,
suitable for use in clean / potable / fresh
water
Recommended usage range:
up to 2000 µS/cm
4 Measuring ranges:
0.1 µS/cm ... 200.0 mS/cm

**GLMU 200 MP-TR**

Art. no. 607814

Ø 12 mm 2-pole measuring cell LFE 202
Graphite, C=1.0; -5 ... +80 °C

PG 13.5 THREAD**GLMU 200 MP-TR-PG**

Art. no. 607815

Ø 12 mm 2-pole measuring cell LFE 202-PG;
Graphite, C=1.0; -5 ... +80 °C

**GLMU 200 MP-TRP*)**

Art. no. 607816

Ø 16 mm 2-pole measuring cell LFE 230
Graphite, C=0.9; 0 ... +60 °C
(higher available on request)

PROFESSIONAL

GLMU 400 MP-SW

Conductivity measuring transducer,
incl. 4-pole measuring cell

General:

4-pole measuring cells,
especially well-suited for use above
2000 µS/cm, applications susceptible to
contamination, sea water, etc.
5 Measuring ranges:
0.1 µS/cm ... 500 mS/cm

**GLMU 400 MP-SW**

Art. no. 607819

Ø 12 mm 4-pole measuring cell LFE 400
Graphite, C=0.55; -5 ... +80 °C

PG 13.5 THREAD**GLMU 400 MP-SW-PG**

Art. no. 607820

Ø 12 mm 4-pole measuring cell LFE 400-PG
Graphite, C=0.55; -5 ... +80 °C

**GLMU 400 MP-SWP*)**

Art. no. 607821

Ø 16 mm 4-pole measuring cell LFE 430
Graphite, C=0.4; 0 ... +60 °C
(higher available on request)

PROFESSIONAL

GLMU 200 MP-RW

Clean/cleanest water measuring system

General:

2-pole measuring cells,
recommended usage range up to
200 µS/cm
Usage range up to 200 µS/cm
3 Measuring ranges: 0.01 ... 200.0 µS/cm

**GLMU 200 MP-RW**

Art. no. 607817

Ø 12 mm 2-pole measuring cell LFE 240
stainless steel/ PEEK; C=0.1; -5 ... +80 °C

**GLMU 200 MP-RWP*)**

Art. no. 607818

Ø 12 mm 2-pole measuring cell LFE 220
stainless steel/ PEEK; C=0.1; -10 ... +100 °C

PROFESSIONAL

GLMU 200 MP-LTG

Measuring transducer with 2-pin electrode

General:

2-pole measuring cells,
suitable for use in organic substances
(alcohol, benzine, diesel)
Usage range up to 1000 µS/cm
2 Measuring ranges:
0.1 µS/cm ... 2000 µS/cm

**GLMU 200 MP-LTG**

Art. no. 607641

Ø 12 mm 2-pole measuring cell LFE 210
Platinum glass; C=1.0

*) Attention:

A special cable is supplied with the professional version.

The measuring cell can be unscrewed locally without having to change the wiring!

CONDUCTIVITY MEASURING TRANSDUCER

General:

Cheap conductivity measurement in drinking water, sea water, process water and wastewater, operational.

Specifications:	GLMU 400 MP	GLMU 200 MP	GLMU 200 MP-RW
Measuring ranges: (customer-selectable)			
Conductivity:	0.0 ... 200.0 µS/cm 0 ... 2000 µS/cm 0.00 ... 20.00 mS/cm 0.0 ... 200.0 mS/cm 0 ... 500 mS/cm	0.0 ... 200.0 µS/cm 0 ... 2000 µS/cm 0.00 ... 20.00 mS/cm 0.0 ... 200.0 mS/cm	0.0 ... 200.0 µS/cm 0.00 ... 20.00 µS/cm
Specific resistance:	0.0 ... 200.0 kOhm*cm 0.00 ... 20.00 kOhm*cm 1 ... 5000 Ohm*cm 1.0 ... 500.0 Ohm*cm 1.00 ... 50.00 Ohm*cm	5.0 ... 100.0 kOhm*cm 0.50 ... 10.00 kOhm*cm 50 ... 1000 Ohm*cm 5.0 ... 100.0 Ohm*cm	0 ... 200 kOhm*cm 0 ... 2000 kOhm*cm
TDS:	0.0 ... 200.0 mg/l 0 ... 500.0 mg/l 0 ... 2000 mg/l 0.0 ... 20.0 g/l 0 ... 200 g/l	0.0 ... 200.0 mg/l 0 ... 2000 mg/l	0.0 ... 200.0 mg/l 0.00 ... 20.00 mg/l
Salinity:	0.0 ... 70.0 (PSU)	0.0 ... 70.0 (PSU)	
Temperature measurement:	5.0 ... +140.0 °C (device) - permissible temperature of the measuring cell note!		
Measuring cell:	4-pole measuring cell	2-pole measuring cell	2-pole measuring cell
Standard measuring cell:	conductivity measuring cell with integrated temperature sensor. Cell constant determined from the factory and preset.		
Accuracy: (at nominal temperature = 25 °C)			
Conductivity:	0.5 % of reading ± 0.3 % FS (-RW: ±1 % v. MW ±0.3 % FS)		
Temperature measurement:	±0.2 °C ±1 digit		
Cells connection:	7-pin DIN socket		
Cell constant:	K = 0.30 ... 1.20, adjustable (-RW: 0.03 ... 0.12)		
Temperature compensation:	off: no compensation Lin: linear compensation (of 0.3 ... 3.0 % / K) nLF: non-linear function of natural water according to EN27888 (ISO 7888) in salinity: automatically after IOT		
Display:	approx. 10 mm high, 4-digit LCD display		
Output signal:	4 ... 20 mA (2-wire), standard, 0 ... 1 V or 0 ... 10 V (3-wire), surcharge		
Galvanic isolation:	input electrically isolated		
Power supply:	12 ... 30 V DC (for option 0 ... 10 V: 18 ... 30 V DC)		
Reverse polarity:	50 V continuous		
perm. burden (at 4 ... 20 mA):	$R_A [\Omega] \leq (U_v [V] - 12 V) / 0,02 A$		
perm. load (at 0 ... 10 volts):	$R_L > 3000 \Omega$		
Working temperature:	-25 ... +50 °C (transmitter), 0 ... +80 °C (measuring cell)		
Storage temperature:	-25 ... +70 °C		
Electrical connection:	Angle connector according to EN 175301-803/A (IP65)		
Housing:	ABS (IP65) except electrode connection sockets		
Dimensions:	82 x 80 x 55 mm, without angle plug and socket		
Warranty:	12 months		
Mounting:	with fixing holes for wall mounting, mounting distance: 70 x 50 mm (W x H)		
Scope of supply:	Device, measuring cell, manual		

Options:

AV010:
Output signal 0 ... 10 V

AV01:
Output signal 0 ... 1 V

KL=...:
longer measuring cell cable (recommended max. 5 m)

Accessories and spare parts:

GLMU 400 MP-UNI-AV010

Art. no. 608006

GLMU 400 MP-UNI-AV01

Art. no. 608053

GLMU 400 MP-UNI-AV420

Art. no. 608052

Transmitter without measuring cell, suitable for 2- and 4-pole measuring cells to create your own conductivity measuring system with special measuring cells.

Different standard systems:

- Area selection of cell constant 0.01; 0.1; 1.0; 10, for example, 1.0 corresponds to 0.300 ... 1.200, 0.1 corresponds to 0.0300 ... 0.1200
- Depending on this measuring range selection without limitations (5 regions)
- selection of temperature input Pt1000 or NTC10 k

Note: The measuring accuracy of the overall system strongly from the measuring cell used and the dependent on the area of application

LFE 202

Art. no. 604344

2-pole spare measuring cell (for GLMU 200 MP-TR)

LFE 202-PG

Art. no. 603594

2-pole spare measuring cell (for GLMU 200 MP-TR-PG)

LFE 230

Art. no. 607825

2-pole spare measuring cell (for GLMU 200 MP-RWP)

LFE 400

Art. no. 604635

4-pole spare measuring cell (for GLMU 400 MP)

LFE 400-PG

Art. no. 603565

4-pole spare measuring cell (for GLMU 400 MP-PG)

LFE 430

Art. no. 607827

4-pole spare measuring cell (for GLMU 400 MP-SWP)

LFE 240

Art. no. 607828

2-pole replacement measuring cell (for GLMU 200 MP-RW)

LFE 220

Art. no. 607829

2-pole replacement measuring cell (for GLMU 200 MP-RW-RWP)

LFE 210

Art. no. 606991

2-pole replacement measuring cell (for GLMU 200 MP-LTG)

PG 13.5

Art. no. 603205

Plug on thread adapter for pressureless use, for electrodes with 12 mm shank diameter

GWA1Z

Art. no. 602914

Thread adapter PG13.5 to G1", plastics

GKL 100

Art. no. 601396

Conductivity control solution

100 ml bottle with 1413 µS/cm, according to DIN EN 27888

GKL 101

Art. no. 601398

Conductivity control solution

(250 ml bottle with 84 µS/cm)

GKL 102

Art. no. 601400

Conductivity control solution

(100 ml bottle containing 50 mS/cm)

VKMU-M12

Art. no. 609306

Connection cable, 5 m long



HIGHLIGHTS:

- For the installation of up to 3 electrochemical transducers with an installation length of 120 mm and PG 13,5 process connection
- Side connections with G1/2 thread
- Flow direction reversible by reinserting the filling tube

DFG70

Art. no. 611372

Flow-Thru Vessel

General:

The flow vessel DFG70 is used for the installation of electrochemical transducers (e.g. pH and redox electrodes, glass conductivity sensors, compensation thermometers etc.) with PG13, 5-screw-in thread and an installation length of 120 mm. It protects the built-in sensors from breakage and ensures a correct flow of the sensor to prevent measurement errors. Up to 3 transducers can be installed. Unneeded openings are sealed with sealing plugs (2 pieces included). The flow vessel is mounted inline or in a bypass.

Specifications:

Container:	PC Polycarbonate, crystal clear, color less, 250 ml
Connector block:	PVC-U with mounting holes for 6 mm screw
O-Ring seals:	EPDM
Storage vessel hose connection:	PP polypropylene, outside/inside diameter 6/4 mm
Working temperature:	0 ... 60 °C
Operating pressure:	6 bar at 20°C; 0,2 bar at 60°C
Line connection:	2 x female G1/2 thread, sideways
Sensor connection:	3 x female PG 13.5 thread, topwise (2 with sealing plugs)

OXYGEN MEASURING TRANSDUCER FOR DISSOLVED OXYGEN IN LIQUIDS



OXY 3610 MP

Art. no. 602029

Oxygen measuring transducer incl. sensor

Specifications:	
Measuring ranges:	
Oxygen concentration:	0.00 ... 25.00 mg/l (dissolved)
Temperature:	0.0 ... 50.0 °C
Accuracy (at nominal temperature 25 °C):	
Oxygen:	±1.5 % of m.v. ±0.2 mg/l
Temperature:	±0.1 °C ±1 digit
Output signal (only O₂):	4 ... 20 mA (2-wire - standard), 0 ... 10 V (3-wire - option)
Electric isolation:	input electrically isolated
Auxiliary energy:	12 ... 30 V DC (at output 4 ... 20 mA) 18 ... 30 V DC (at output 0 ... 10 V - Option)
Perm. impedance (at 4 ... 20 mA):	$R_A [\Omega] \leq (U_v [V] - 12 V) / 0.02 A$
Permissible load (at 0 ... 10 Volt):	$R_L > 3000 \Omega$
Working condition:	0 ... +50 °C, 0 ... +95 % RH (non-condensing)
Storage temperature:	-20 ... +70 °C
Reverse voltage protection:	50 V permanently
Display:	approx. 10 mm high, 4-digit LCD-display
Housing:	ABS (IP65 - with the exception of sensor plug)
Dimensions:	82 x 80 x 55 mm (without elbow-type plug and sensor plug)
Electric connection:	elbow-type plug acc. to EN 175301-803/A (IP65), max. wire cross section: 1.5 mm ² , wire diameter from 4.5 ... 7 mm
Sensor connection:	5-pin jack connector, screwable
Calibration:	1-point calibration: simple quick calibration in atmospheric air.

Oxygen sensor:	
Type:	active membrane type, with integrated NTC-resistor
Response time:	95 % in 10 s, depending on temperature
Operation life:	3 years or more, depending on maintenance
Operating pressure:	max. 3 bar
Flow rate:	min. 30 cm/s
Build in diameter:	Ø 12.0 ±0.2 mm (suitable for ½" screw connection)
Overall length:	approx. 220 mm (with anti-buckling glanding)
Build in length:	approx. 110 mm
Connection cable:	approx. 4 m, with 5-pin plug, screwable
Warranty:	12 months
Working temperature:	0 ... +40 °C
Scope of supply:	device incl. electrode, GWOK 01 and KOH 100

Variant:	
OXY3610MP-V2	
Art. no. 602720	
Output signal 0 ... 10 V	

Accessories and spare parts:	
GWO 3600-L04-MU	
Art. no. 607198	
Spare electrode with 4 m cable	
GWO 3600-L10-MU	
Art. no. 610382	
Spare electrode with 10 m cable	
GWO 3600-L30-MU	
Art. no. 610171	
Spare electrode with 30 m cable	
GSKA 3600	
Art. no. 601414	
protection cap for depth measuring	
GAS 3600	
Art. no. 603497	
Working set (consisting of 3 spare diaphragm heads and 100 ml KOH-electrolyte)	
GWOK 01	
Art. no. 601411	
spare diaphragm head	
KOH 100	
Art. no. 603356	
spare electrolyte KOH, 100 ml-bottle	
GCAL 3610	
Art. no. 611371	
Calibration bottle	

M12-CONNECTION CABLE



KM4P-G02

Art. no. 606224

Straight connector, 4-pole, 2 m cable

KM4P-G10

Art. no. 604518

Straight connector, 4-pole, 10 m cable

KM4P-W02

Art. no. 604104

90° connector, 4-pole, 2 m cable

KM4P-W10

Art. no. 607963

90° connector, 4-pole, 10 m cable

KM4P-GL

Art. no. 607964

Connector for self-tailoring, 4-pole

General:

Screened PUR-connection cable with moulded M12x1-connector (and loose ends). Available in straight and angular design.

OPTICAL OXYGEN CONVERTER



HIGHLIGHTS:

- Two 4 ... 20 mA (or 0 ... 5 V) outputs: concentration and saturation
- Fully pressure and temperature compensated
- Calibration in many applications once per year!
- No flow required

**LOW MAINTENANCE
& ROBUST**

GODOX-200-ST

Art. no. 608019

Optical oxygen transmitter for universal applications, stainless steel

GODOX-200-PS

Art. no. 608020

Optical oxygen transmitter for continuous measurements in salt water

General:

The oxygen transmitter GODOX-200 is a robust measuring system for the low-maintenance continuous use. Compared to electrochemical sensors, it comes without electrolyte, measured with a fluorescence-maturity method. Together with the complete data preparation including automatic ambient pressure and temperature compensation it provides a free package for continuous measurements. Measurement in depth up to 30 m is possible. The life of the replaceable measuring membrane is generally 2 years.

Specifications:

Measuring ranges (both can be used simultaneously)

Oxygen concentration:	0 ... 20 mg/l (=ppm)
Oxygen saturation:	0 ... 200 % O ₂
Output signal:	4 ... 20 mA or 0 ... 5 V respectively (changeable)
Accuracy:	±0.1 mg/l less than 1 mg/l, ±0.2 mg/l more than 1 mg/l
Response time T₉₀:	<30 s
Operating temperature:	0 ... 65 °C

Supply: 5 ... 15 V DC, approx. 160 mA

Material

Housing:	PVC / stainless steel, option „marine“: PVC
Diaphragm:	PET

Dimensions sensor

Length:	225 mm length
Mounting length:	70.5 mm
Diameter:	42.1 mm
Mounting diameter:	28.0 mm
Process connection:	1" NPT front / rear (others on request)

Connection

Loose cable ends:	No	color	description
	1	red	supply +
	2	black	supply -
	3	green	output O ₂ concentration
	4	white	output O ₂ saturation

Cable length: 5 m

Scope of supply: Transmitter (consisting of sensor body and evaluation, connected via cable), storage cap

Option:

Cable length 10 m

Cable length 15 m

Cable length 30 m

Accessories and spare parts:

GSKA 200

Art. no. 607992

Metal cap steel (Mechanical protection / browsing protection)

EMS 200

Art. no. 607990

Spare membrane head-set

GNG 12/300

Art. no. 600274

Power Supply



PH-MEASURING TRANSDUCER WITH ON SITE DISPLAY

HIGHLIGHTS:

- automatically and manually temperatur compensation
- external Pt1000-temperature probe connectable

WITH ELECTRICALLY ISOLATION



GPHU 014 MP-BNC

Art. no. 601985

pH-measuring transducer with on site display without electrode, BNC-connection

GPHU 014 MP-Cinch

Art. no. 601989

pH-measuring transducer with on site display without electrode, Cinch-connection

Specifications:

Measuring ranges:	0.00 ... 14.00 pH
Accuracy:	0.02 pH ±1 digit (at nominal temperature = 25 °C)
Output signal:	4 ... 20 mA (2-wire), standard; 0 ... 10 V (3-wire), upon upcharge
Electric isolation:	input electrically isolated
Auxiliary energy:	12 ... 30 V DC (for option 0 ... 10 V: 18 ... 30 V DC)
Perm. impedance (at 4 ... 20 mA):	$R_A [\Omega] \leq (U_v [V] - 12 V) / 0.02 A$
Permissible load (at 0 ... 10 Volt):	$R_L > 3000 \Omega$
Electrode:	any standard pH electrode is suitable (not in scope of supply)
Input resistance:	10 ¹² Ohm
Electrode socket:	BNC-socket or Cinch-socket
Temperature compensation:	-30 ... +150 °C, manually via 3 keys or automatically via external Pt1000 sensor, banana plug
Adjustment:	via 3 keys and integrated LCD, 2-point-calibration
Temp. sensor socket:	2 x banana socket Ø 4 mm, for Pt1000 probe
Display:	approx. 10 mm high, 4-digit LCD-display
Working temperature:	0 ... +50 °C (electronic)
Storage temperature:	-20 ... +70 °C
Electric connection:	elbow-type plug acc. to EN 175301-803/A (IP65)
Housing:	ABS (IP65), with the exception of electrode and temperature connection sockets. (cpl. IP65 upon request)
Dimensions:	82 x 80 x 55 mm (H x W x D)
Mounting:	with fixing holes for wall mounting (accessible after removal of cover), Mounting distance: 70 x 50 mm (W x H), Fixing screws: max. shaft-Ø 4 mm

Option:

V2: Output signal 0 ... 10 V

MB...: limited measuring range (please state the desired range) (i.e.: 2.00 ... 10.00 pH)

Accessories and spare parts:

GTF 2000-B-WD

Art. no. 601884

Water proof Pt1000-temperature probe, with 2 banana plugs Ø 4 mm

GE 100-BNC

Art. no. 600704

Standard electrode, BNC-plug (thread adapter PG 13.5 optional available)

GE 100-Cinch

Art. no. 600702

Standard electrode, Cinch-plug (thread adapter PG 13.5 optional available)

GE 117-BNC

Art. no. 600730

pH electrode with integrated Pt1000-sensor, 1 x BNC-plug and 1 x banana plug Ø 4 mm, thread PG13.5, pressure resistant up to 6 bar

GE 173-BNC

Art. no. 600735

Process electrode for continuous operation, with thread PG 13.5, pressure resistant up to 6 bar, BNC-plug

GE 173-Cinch

Art. no. 600734

Process electrode for continuous operation, with thread PG 13.5, pressure resistant up to 6 bar, Cinch-plug

GAK 1400

Art. no. 603523

working and calibration set (p.r.t. page 62)



DFG70

Art. no. 611372

Flow-thru vessel (p.r.t. page 187)

For add. electrodes and accessories p.r.t. p. 65/66, Pt1000 probes p.r.t. page 21 - 23 and from 207.

REDOX-MEASURING TRANSDUCER

WITH ELECTRICALLY
ISOLATIONDimensioned sketch
GPHU / GRMU:

GRMU 2000 MP-BNC

Art. no. 602019

Redox-measuring transducer without electrode, BNC-connection

GRMU 2000 MP-Cinch

Art. no. 602021

Redox-measuring transducer without electrode, Cinch-connection

Specifications:

Measuring ranges:	±2000 mV or special limited measuring ranges acc. to customer specification!
Accuracy:	0.2 % FS (at nominal temperature = 25 °C)
Output signal:	4 ... 20 mA (2-wire), standard 0 ... 10 V (3-wire), upon upcharge
Electric isolation:	input electrically isolated
Auxiliary energy:	12 ... 30 V DC (for option 0 ... 10 V: 18 ... 30 V DC)
Perm. impedance (at 4 ... 20 mA):	$R_A [\Omega] \leq (U_v [V] - 12 V) / 0,02 A$
Permissible load (at 0 ... 10 Volt):	$R_L > 3000 \Omega$
Input resistance:	10^{12} Ohm
Electrode socket:	BNC-socket or Cinch-socket
Option: on site display	approx. 10 mm high, 4-digit LCD-display
Working temperature:	0 ... +50 °C (electronic)
Storage temperature:	-20 ... +70 °C
Electric connection:	elbow-type plug acc. to EN 175301-803/A (IP65)
Housing:	ABS (IP65) with the exception of electrode connection sockets. (cpl. IP65 upon request)
Dimensions:	82 x 80 x 55 mm (H x W x D)
Mounting:	with fixing holes for wall mounting (accessible after removal of cover), Mounting distance: 70 x 50 mm (W x H), Fixing screws: max. shaft-Ø 4 mm

Option:

VO:
On site display**V2:**
Output signal 0 ... 10 V**MB...:**
Limited measuring range (please state the desired range)

Ordering example:

GRMU 2000 MP-BNC-VO:
GRMU2000MP with BNC electrode socket and on site display

Accessories and spare parts:

GR 105-Cinch
Art. no. 607797
Redox electrode with cinch-plug**GR 105-BNC**
Art. no. 607798
Redox electrode with BNC-plug**GR 175-BNC**
Art. no. 607801
Redox electrode with BNC-plug**PG 13,5**
Art. no. 603205
Plug on thread adapter for pressureless use, with external thread PG 13.5 (suitable for any electrode with shank diameter 12 mm)

For additional electrodes and accessories p.r.t. page 65/66

FLOW MEASURING TRANSDUCER WITH HALL-EFFECT SENSOR

FOR LOW VISCOS NON
AGGRESSIVE LIQUIDS

VISION 2008

Art. no. 603492

Flow measuring transducer with hall-Sensor incl. elbow-type plug

General:


- minimum size, maximum accuracy
- easy installation
- installation in any position possible
- optimum-quality due to high-quality materials used
- no maintenance

Application:

- manufacturing of oil and gas burners, flow heaters or cooling systems
- for dish washers and washing machines
- automotive technology (measuring of petro consumption, etc.)
- laboratories, chemical works, pharmaceutical industry
- agriculture and horticulture

Specifications:


Rotor-position scanning:	hall sensor
Measuring ranges:	1.5 ... 25 l/min
Resolution:	approx. 1000 pulses/l
Measuring agent:	clean liquids, we recommend filtering with approx. 20 ... 40 micron
Viscosity:	up to approx. 15 cSt.
Accuracy:	±3 % ranging from 10 - 10 %
Repeatability:	<0.5 %
Working temperature:	-20 ... +100 °C
Operating pressure:	25 bar
Electric connection:	elbow-type plug acc. to EN 175301-803/A, type C industrial
Auxiliary energy:	5 ... 24 V DC, approx. 8 mA
Multiplier (R):	1 ... 2.2 kOhm
Output signal:	frequency 5 ... 416 Hz, open collector NPN
Output current:	max. 20 mA
Material:	
Housing:	Grilamid TR55 (PA12)
Rotor:	Grilamid (PA12 Ferrit)
Bearings:	PTFE 15 % graphite
Delivery connection:	G 3/8" thread
DN:	8 mm
Dimensions:	approx. 55 x 17 x 30 mm
Weight:	approx. 15 g
Scope of supply:	Device, manual

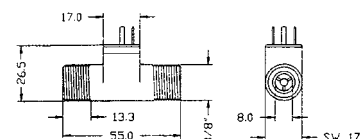

SCREW-IN TRANSMITTER

HIGHLIGHTS:

- Complete sensor with transmitter in the housing of a proximity switch
- Conversion of frequencies into current, voltage, frequency or pulse signals
- 16-bit microcontroller
- Linearisable
- A parameter can be set locally

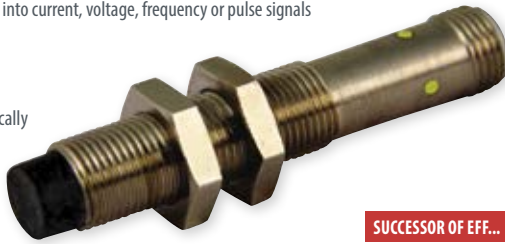

SUCCESSOR OF EFF...

LABO-D...I / U / F / C

Screw-in transmitter

Specifications:	
Sensor:	Magnetic field sensor (magneto-resistive) Pre-tensioned hall sensor Inductive sensor
Detection distance:	Magnetic field sensor: Depending on magnets used, signal threshold typ. 8 Gauss (= 0.8 milliTesla), switching distances over 25 mm possible Pre-tensioned hall sensor: Typ. 0.5 ... 2.5 mm Inductive sensor: Typ. max. 4 mm based on 1 cm ³ ST37
Measuring ranges:	0 ... 10 kHz
Measurement uncertainty:	±0.1 % measured value
Pressure resistance:	Pressureless application
Operating temperature:	-0 ... +70 °C
Storage temperature:	-20 ... +80 °C
Materials:	Housing: CW614N nickelled Sensor flap: PA Plug insert: PC Contacts: CuZn, gold-plated
Supply voltage:	+10 ... +30 V DC, with voltage output 10 V: 15 ... 30 V DC
Power requirement:	<1 W (for no-load output)
Output data:	all outputs are resistant to short circuits and reversal polarity protected
Current output:	4 ... 20 mA (0 ... 20 mA available on request)
Voltage output:	0 ... 10 V (2 ... 10 V available on request)
Frequency output:	Transistor output „Push-Pull“, I _{out} = 100 mA max.
Pulse output:	Transistor output „Push-Pull“, I _{out} = 100 mA max. Pulse width 50 ms Pulse/quantity is to be stated
Display:	Yellow LCD shows Operating voltage (LABO-D...I / U) or Output status (LABO-D...F / C) (rapid flashing = Programming)
Electrical connection:	for round plug connector M12x1, 4pole
Protection rating:	IP67


Accessories and spare parts:

Round plug connector/cable see page 188

LABO-D- 1 - 2 - 3 - 4

Greisinger		
1.	Sensor	
	H	Magnetic field sensor
	V	Pre-tensioned hall sensor
	I	Inductive sensor
2.	Signal output	
	I	Current output 4 ... 20 m
	U	Voltage output 0 ... 10 V
	F	Frequency output
	C	Pulse output
3.	Programming	
	P	Programmable (teaching possible)
	N	Cannot be programmed (no teaching)
4.	Electrical connection	
	S	For round plug connector M12x1, 4-pole

LEVEL TRANSMITTER



LC-S45HM...

Level transmitter (brass)

LC-S44HM...

Level transmitter (brass)

LC-K52HK...

Level transmitter (stainless steel)

General:

A magnet equipped float activates a reed chain inside a tube which is connected to resistors comparable to a potentiometer. The gapless positioning of the sensors provides a continuous signal with good resolution (up to 10 ... 20 mm) and repeatability.

- top assembly
- selectable material combinations
- optional: with user-specific characteristic (for adjustment to tank design)

Application:

Sensor suitable for: Water, oil, aggressive substances (only LC-K52K...)

Specifications:

Tube length:	250 mm, 500 mm, 750 mm, 1000 mm, 1500 mm and 2000 mm					
Float travel:	...0250	...0500	...0750	...1000	...1500	...2000
LC-S45M...:	190 mm	440 mm	690 mm	940 mm		
LC-S44M...:				930 mm	1430 mm	1930 mm
LC-K52K...:	160 mm	410 mm	660 mm	910 mm	1410 mm	1910 mm
Division (resolution):	10 mm (LC-S45..., LC-K52K0250) or 20 mm					
Output signal:	4 ... 20 mA (2-wire) (see option)					
Optional:	0 ... 10 V (3-wire) (see option)					
Auxiliary energy:	10 ... 30 V DC (at option Flex: 18 ... 30 V DC)					
Electrical connection:	elbow-type plug acc. to DIN 43650-A / ISO 4400 (at option Flex: 4-pole locked plug M12 x 1)					
Working temperature:	0 ... 85 °C					
Working pressure:	max. 20 bar (LC-S...), max. 40 bar (LC-K...)					
Density medium:	>0,34 g / cm ³ (LC-S45...), >0,44 g / cm ³ (LC-S44...), >0,66 g / cm ³ (LC-K52...)					

Mounting position: vertical, float pointing downwards**Protection rating:** IP 65

Dimensions:	LC-S45...	LC-S44...	LC-K52...
Sensor head:	~50 x 50 x 78 mm	~60 x 58 x 78 mm	Ø 69 x 78 mm
Tube length:	according to design type		
Mounting SW:	SW 40	SW 46	SW 46
Screw-in thread:	G1 A	G1 1/2 A	G2 A
Float:	Ø 30 x 45 mm	Ø 44 x 50 mm	Ø 52 x 70 mm
Materials			
Housing:	Ms58	Ms58	stainl. steel 1.4571
Switching tube:	Ms58	Ms58	stainl. steel 1.4571
Float:	Spansil	Spansil	stainl. steel 1.4571

Option:

Output signals 4 ... 20 mA (2- or 3-wire), 0 ... 10 V

Versions:

Tube length:	..0250	..0500	..0750	..1000	..1500	..2000
LC-S45HM...	.	.	.	.		
LC-S44HM...				.	.	.
LC-K52HK...	.	.	.	.	.	.

FLOW SWITCH FLUVATEST

NEW!



- HIGHLIGHTS:
- Highly reproducible
 - Low pressure loss
 - Hermetic separation between electrical and hydraulic component

US2-...HH / VM

Flow switch Fluvatest

General:	
The paddle flow rate controller in plastic design has a titanium axis which assures a low-friction bearing. The paddle follows the flow rate against the force of two magnets acting as springs. The paddle magnet also activates a reed contact positioned outside the flow chamber. The paddle is available in two standard lengths, wherein each paddle can also be shortened at a predetermined breaking point.	
Specifications:	
Switch:	Reed switch
Nominal width:	DN 25 ... 80
Process connection:	Union nut G ¾
Switching point H ₂ O:	3 ... 62 l/min
Q _{max.} :	up to 600 l/min
Tolerance:	±15 %
Pressure resistance:	PN 10 bar
Medium temperature:	-20 ... +85 °C
Ambient temperature:	-20 ... +70 °C
Media:	Water, oils
Wiring:	normally opened Nr. 0.372
Switching voltage:	max. 240 V AC / 46 V DC
Switching capacity:	100 VA / W
Protection rating:	2
Switching current:	max. 1 A
Protection class:	IP 65
Cable:	0.5 m (optional 1 m / 2 m / 3 m)
Materials medium-contact:	Noryl (PPO), titanium, barium ferrite, Ms58 (with version VM)
Non-mediumcontact materials:	Noryl, seal EPDM
Installation location:	Installation location influences the adjustment range! The installation position with a flow from top to bottom is not permitted.
Dimensions:	Ø 34 x 127 mm (US2-025-...), Ø 34 x 150 mm (US2-050-...)
Weight:	approx. 50 g (-HH), approx. 105 g (-VM)
Scope of supply:	Device, manual

Accessories and spare parts:	
E PDM	Seal 14 x 4 mm
FKM	Seal 14 x 4 mm

US2- 1 - 2 - 3 - 4

Greisinger		
1.	Nominal width	
	025	DN 25 ... 40
	050	DN 50 ... 80
2.	Nominal width	
	HH	Screw-in thread G 3/4 Noryl
	VM	Brass soldering nozzles
	VK	Stainless steel welded nozzles (Option)

FLOW SWITCH

NEW!



- HIGHLIGHTS:
- Economical design
 - High switching power
 - Insensitive to dirt

FW1- ... GP

Flow Switch

General:	
Mechanical flow switch, for fluid media, with spring-supported piston and magnetic triggering of a reed switch. Robust construction in POM material.	
Specifications:	
Switch:	reed switch
Nominal width:	DN 15 ... 25
Process connection:	female thread G 1/2 ... G 1 (note: for plastic parts it is not possible to guarantee trueness of calibration; further process connections available on request)
Switching range:	1 ... 11 l/min
Pressure loss:	0.2 ... 0.8 bar at Q _{max.}
Q _{max.} :	to 30 l/min
Tolerance:	±10 % of full scale value
Pressure resistance:	PN 10 bar
Media temperature:	-20 ... +90 °C
Ambient temperature:	-20 ... +70 °C
Media:	water (oil available on request)
Wiring:	normally open no. 0.378
Switching voltage:	max. 230 V AC
Switching current:	max. 0.5 A
Switching capacity:	max. 50 VA
Protection rating:	2 - safety insulation
Ingress protection:	IP 67
Electrical connection:	for round plug connector M12x1, 4-pole
Materials medium-contact:	POM GV, POM, 1.4310, hard ferrite
Non-mediumcontact materials:	PC, 1.4301, 1.4305
Installation location:	Standard: horizontal inwards flow; other installation positions are possible; the installation position affects the switching point and range.
Dimensions:	FW1-015GP 85 x 30 (L x H) FW1-020GP 100 x 36 x 36 (L x H x W) FW1-025GP 38 x 40 mm (H x W)
Weight:	FW1-015GP 0.05 kg FW1-020GP 0.15 kg FW1-025GP 0.20 kg
Scope of supply:	Device, manual

FW1- 1 - G - P - 4

Greisinger		
1.	Nominal width	
	015	DN 15 - G 1/2
	020	DN 20 - G 3/4
	025	DN 25 - G 1
2.	Nominal width	
	G	female thread
3.	Connection material	
	P	POM
4.	Switching range H ₂ O for horizontal inwards flow	
	006	1 - 6 l/min (DN 15 - G 1/2 only)
	011	1 - 11 l/min (DN 20 - G 3/4, DN 25 - G 1 only)

FLOW TRANSMITTER



HIGHLIGHTS:

- Uncomplicated measurement of flow rates
- No magnets; uses inductive sensor
- Long working life thanks to high quality ceramic axis and special plastic bearing
- Run-in and run-out sections are not necessary.
- Modular construction with various connection systems
- Plug-in and rotatable connections
- Output signal PNP or NPN
- Intrinsically safe behaviour
- Optionally, non-return valve, filter, constant flow rate device in the connections

RRI-010GVQ020V10KPK

Flow transmitter 0.1 ... 1.5 l/min

RRI-010GVQ050V10KPK

Flow transmitter 0.2 ... 10.0 l/min

RRI-010GVQ070V10KPK

Flow transmitter 0.4 ... 12.0 l/min

RRI-025GVQ080V10KPK

Flow transmitter 2 ... 30 l/min

RRI-025GVQ120V10KPK

Flow transmitter 3 ... 60 l/min

RRI-025GVQ160V10KPK

Flow transmitter 4 ... 100 l/min

General:

The flow meter consists of a spinner which is rotated by the flowing medium. The rotor's rotational speed is proportional to the flow volume per unit time. The rotor is fitted with stainless steel clamps (optionally titanium or Hastelloy®). An inductive proximity switch records the rotational speed, which is proportional to the flow rate.

Application:

Cooling water monitoring, filling control

Specifications:

Measuring ranges:	RRI-010GVQ020V10KPK: 0.1 ... 1.5 l/min, approx. 10000 Imp./l RRI-010GVQ050V10KPK: 0.2 ... 10.0 l/min, approx. 3300 Imp./l RRI-010GVQ070V10KPK: 0.4 ... 12.0 l/min, approx. 1750 Imp./l RRI-025GVQ080V10KPK: 2 ... 30 l/min, approx. 1200 Imp./l RRI-025GVQ120V10KPK: 3 ... 60 l/min, approx. 600 Imp./l RRI-025GVQ160V10KPK: 4 ... 100 l/min, approx. 250 Imp./l <i>To achieve the greatest possible precision, the pulse/l-value determined on the test stand is specified on the type plate for each version.</i>
Sensor:	inductive (without magnets!)
Nominal width:	DN 10 (RRI-010) DN 25 (RRI-025)
Mechanical Connection:	female thread G 3/8 (RRI-010), G 1 (RRI-025)
Pressure resistance:	PN 16
Medium temperature:	0 ... 60 °C
Materials medium-contact:	Housing: PPS, PVDF (Fortron 1140L4) Rotor: PVDF Clamps: 1.4310 Bearing: Iglidur X Axis: ceramic ZrO ₂ -TZP Seal: FKM
Supply voltage:	10 ... 30 V DC (quiescent current consumption max. 10 mA)
Electronic output:	PNP, max. 200 mA, short-circuit proof, reversed polarity protected
Electrical connection sensor:	cable 2 m, PVC optional for round plug connector M12x1, 4-pole
Ingress protection:	IP 67
Conformity:	CE
Dimensions:	RRI-010: 50 x 50 x 29 mm, RRI-025: 70 x 70 x 53 mm without connections and sensor
Weight:	RRI-010 approx. 0.2 kg, RRI-025 ca. 0.5 kg
Scope of supply:	Device incl. connecting pieces and sensor

CABLE/ROUND PLUG CONNECTOR SEE PAGE 188

FLOW TRANSMITTER



HIGHLIGHTS:

- Complete transmitter in 12 mm housing
- For various nominal tubing widths, the same transmitter
- No moving parts
- Signal proportional to the flow speed
- 4 ... 20 mA or 0 ... 10 V or frequency output
- Adjustable working range
- User-configurable via plug pin (teaching)
- Wide temperature range
- Mounting in crimp-on connection G1/2

LABO-F012-I100KP

Flow transmitter (Current output 4 ... 20 mA)

LABO-F012-U100KP

Flow transmitter (Voltage output 0 ... 10 V)

LABO-F012-S100KPLO

Flow transmitter (Switching output)

General:

The flow transmitter LABO-F012 is intended for measurement and monitoring of the flow speed of water in pipelines. It works without moving parts. The functional principle is the measurement of heat removal at the sensor tip through the flowing medium (calorimetric measurement principle). Versions with an analogue output (4 ... 20 mA or 0 ... 10 V) or switching output are available. The analogue output issues a proportional signal to the flow speed. In the process, the user can set the maximum value on the device. The switching output signals when a minimum flow speed is undercut, which can also be set on the instrument.

Application:

Cooling water monitoring, general flow monitoring of water

Specifications:

Sensor:	calorimetric measurement principle
Process connection:	push-in sensor Ø 12 mm
Measuring ranges:	2 ... 300 cm/s adjustable limit value
Measurement accuracy:	depending on the installation location and flow conditions typically ±10 % of full scale value or 2 cm/s, with 10 x D in inlet and outlet
Repeatability:	±1 %
Pressure resistance:	with crimp-on connection up to PN40 (with assembly according to requirements)
Medium temperature:	-20 ... +100 °C (extended temperature range)
Ambient temperature:	0 ... +60 °C
Temperature dependency:	±0.01 % / K
Supply voltage:	24 V DC ±10 % (controlled)
Power consumption:	<2 W
Analog output:	4 ... 20 mA / load max. 500 Ohm or 0 ... 10 V / min. load 1 kOhm
Switching output:	push-pull, max. 100 mA
Electrical connection:	for round plug connector M12x1, 4-pole
Ingress protection:	IP 67
Materials medium-contact:	Housing 1.4571
Weight:	approx. 0.05 kg excluding screwed connection
Conformity:	CE
Dimensions:	Ø 12 mm, Length 137.5 mm
Scope of supply:	Device

Accessories and spare parts:**ADQ-012G015AM**

Crimp-on connection for mounting of the sensor

CABLE/ROUND PLUG CONNECTOR SEE PAGE 188

ACTIVE POWER TRANSMITTER



- HIGHLIGHTS:
- For 1- and 3-phase power systems with symmetric load
 - Current measuring range 1 A or 5 A
 - Power-factor (cos φ) selectable 0.72 or 1
 - Frequency range 45 ... 400 Hz

WM 500
Active Power Transmitter

General:
Active-power transmitter WM 500 converts active-power of symmetric 1-3 phase power supply systems into proportional industry standard signals. Devices without compensating circuits can be used to measure active-power of phase-angle controlled equipments or electric motor drives controlled by frequency inverters.

Specifications:	
Power supply	
Supply voltage:	230 V AC ±10 % or 24 V DC ±15 %
Frequency AC:	47 ... 63 Hz
Power consumption:	<3 VA
Working temperature:	-10 ... +50 °C
CE-conformity:	EN 55022, EN 60555, IEC 61000-4-4/5
Inputs	
Current:	0 ... 1 A: R _i = 82 mΩ, over load 2-times, 4-times for max. 5 s 0 ... 5 A: R _i = 10 mΩ, over load 2-times, 4-times for max. 5 s
Frequency range:	45 ... 400 Hz, Crest-factor: 3
Curve shape:	insignificant
Voltage:	0 ... 440 V, R _i = 3,4 kΩ/V, over load max. 700 V
Frequency range:	45 ... 400 Hz
Curve shape:	insignificant, without compensating circuit sinusoidal, with compensating circuit
End value:	adjustable -30 ... +5 % for factory adjustment
Outputs: Voltage/current	
Current:	0/4 ... 20 mA selectable, burden ≤500 Ω
Burden error:	<0.1 % (R _L = 0 ... 200 Ω), <0.2 % (R _L = 0 ... 500 Ω)
Voltage:	0/2 ... 10 V selectable, load max. 10 mA
Adjustment:	P = U x I x √ 3 x cosφ = 20 mA (10 V)* (* cosφ=1)
Rise time (T ₉₀):	<500 ms
Housing:	
Connection:	screw terminals, max. 2.5 mm ²
Protection class:	Housing IP30, terminals IP20 acc. to BGV A3

WM500 - 1 - 2 - 3 - 4 - 5

Greisinger		
1.	Power supply system	
	1	1-phase
	3	3-phase
2.	Measuring voltage	
	100	100 V AC
	110	110 V AC
	230	230V AC
	400	400 V AC
	440	440 V AC
3.	Measuring current	
	1	1 A AC
	5	5 A AC
4.	Model	
	1	without compensating circuit
	2	with compensating circuit
5.	Supply voltage	
	0	230 V AC ±10 %
	5	24 V DC ±15 %

Important: For the factory provided settings please specify the measurement range of the effective power and the primary current range of the upstream current transformer in the purchasing order.

AC CURRENT TRANSMITTER



- HIGHLIGHTS:
- 12 measuring ranges selectable
0 ... 6 A / 0 ... 60 A AC
 - Average function selectable
 - Frequency range 40 ... 2000 Hz

CT 500
AC Current Transmitter

General:
AC current transmitter CT 500 converts true r.m.s. current measuring values of all types of waveform into industry standard signals for process control systems. For example, the load current of an frequency converter can be detected and converted. The universal limit interpretation of the inputs and outputs and the wide auxiliary voltage ranges the variety of types in 2 versions.

Specifications:	
Power supply	
Supply voltage:	85 ... 265 V AC or 10 ... 30 V AC/DC
Frequency AC:	40 ... 400 Hz
Power consumption:	<3 VA
Working temperature:	-10 ... +60 °C
CE-conformity:	EN 55022, EN 60555, IEC 61000-4-3/4/5/11/13
Input	
Current:	
Terminals:	0 ... 1 / 2 / 3 / 4 / 5 / 6 A AC, over load max. 9 A
Bushing connection:	0 ... 10 / 20 / 30 / 40 / 50 / 60 A, over load max. 90 A, cable diameter max. 8 mm
R _i :	<20 mΩ
Frequency:	40 ... 2000 Hz fundamental wave, 16 _{2/3} Hz on request
Start value:	adjustable ±5 %
End value:	adjustable ±35 %
Output	
Current:	0/4 ... 20 mA, selectable, burden ≤1 kΩ
Voltage:	0/2 ... 10 V DC, selectable, load max. 15 mA, short circuit proof (parallel with the voltage output max. 5 mA)
Rise time (T ₉₀):	≤150 ms
Accuracy:	≤0,5 %; single adjustment ≤ 0.2 %
Housing:	Polycarbonat, UL 94 V-0, TS35 acc. to DIN EN 60715:2001-09
Weight:	approx. 200 g
Connection:	terminals, max. 2.5 mm ²
Protection class:	housing IP30, terminals IP20, acc. to BGV A3

Accessories and spare parts:
KA-VT
terminal cover for measuring voltages >400 V AC

CT500 - 1 - 2

Greisinger		
1.	Measuring ranges	
	30	0 ... 1 / 2 / 3 / 4 / 5 / 6 and 0 ... 10 / 20 / 30 / 40 / 50 / 60 A AC
		custom range on request
2.	Supply voltage	
	0	85 ... 265 V AC
	5	10 ... 30 V DC

CURRENT AND VOLTAGE TRANSMITTER



HIGHLIGHTS:

- Measuring input for DC- and sinusoidal AC-signals
- Arithmetic average value measurement RMS calibrated
- Frequency range 40 ... 200 Hz

CVT 500

Current and Voltage Transmitter

General:

Transmitter CVT 500 convert current or voltage signals to proportional industry standard signals. Currents up to 5 A AC / DC and voltages up to 400 V AC / DC can go directly to the transmitters. For larger AC currents is a current transformer or for larger AC voltages ahead one voltage transformer.

Specifications:

Power supply

Supply voltage:	230 V AC $\pm 10\%$ (47 ... 63 Hz) or 24 V DC $\pm 15\%$
Power consumption:	<3 VA
Working temperature:	-10 ... +50 °C
CE-conformity:	EN 55022, EN 60555, IEC 61000-4-3/4/5/11/13

Inputs

Accuracy:	$\leq 0.5\%$ ($\leq 0.2\%$ single adjustment)
------------------	--

Standard measuring ranges

Current:	0 ... 1 A and 0 ... 5 A sinusoidal or DC
R_i:	20 m Ω (5 A-) or 100 m Ω (1 A-input)
Overload:	2-times, 4-times max. 5 s

Voltage

Measuring ranges:	0 ... 125 V and 0 ... 250 V AC or DC
R_i:	600 k Ω (125 V-) or 1.2 M Ω (250 V-input)
Overload:	max. 500 V AC/DC

Custom measuring ranges

Voltage:	end value in range 0.1 ... 400 V AC/DC, R _i 4.8 k Ω /V
Overload:	5-times UN, max. 500 V AC/DC
Current:	end value in range 0.001 ... 5 A AC/DC, R _i 100 m Ω
Overload:	2-times, 4-times max. 5 s

Output

Output changing

Voltage/current:	link between terminal 8 and 9
Current output:	0/4 ... 20 mA selectable, burden $\leq 500\ \Omega$
Rise time (T₉₀):	<650 ms
Burden error:	<0.1 % (R _L = <200 Ω), <0.2 % (R _L = <500 Ω)
Voltage:	0/2 ... 10 V selectable, load max. 10 mA

Housing

Connection:	screw terminals, max. 2.5 mm ²
Protection class:	Housing IP30, terminals IP20 acc. to BGV A3

CVT500 - 1 - 2 - 3

Greisinger		
1.	Current ranges	
	0	not installed (custom measuring range voltage)
	1 / 5	standard device 0 ... 1 A and 0 ... 5 A AC / DC
	X	please specify custom measuring range
2.	Voltage ranges	
	0	not installed (custom measuring range current)
	125 / 250	standard device 0 ... 125 V and 0 ... 250 V AC/DC
	X	please specify custom measuring range
3.	Supply voltage	
	0	230 V AC $\pm 10\%$
	5	24 V DC $\pm 15\%$

AC VOLTAGE TRANSMITTER



HIGHLIGHTS:

- 6 measuring ranges
- Average function selectable
- Frequency range 40 ... 2000 Hz fundamental wave

VT 500

AC Voltage Transmitter

General:

VT 500 AC voltage measuring transducers convert the actual effective value of AC voltage of arbitrary curve shapes into proportional unit signals. Consequently, the load voltage of a frequency converter, for example, can be detected and converted. The universal configuration of inputs and outputs and the wide auxiliary voltage ranges limit the range of types to 2 versions. The low housing width enables space-saving installation.

Specifications:

Power supply

Supply voltage:	85 ... 265 V AC or 10 ... 30 V AC/DC
Frequency AC:	40 ... 400 Hz
Power consumption:	<3 VA
Working temperature:	-10 ... +60 °C
CE-conformity:	EN 55022, EN 60555, IEC 61000-4-3/4/5/11/13

Input

Voltage AC:	0 ... 100 / 200 / 300 / 400 / 500 / 600 V AC, overload max. 1200 V max. 5 s
R_i:	720 k Ω
Frequency:	40 ... 2000 Hz fundamental wave, 16 _{2/3} Hz on request
Start value:	adjustable $\pm 5\%$
End value:	adjustable $\pm 35\%$

Output

Current:	0/4 ... 20 mA, selectable, burden $\leq 1\ \text{k}\Omega$
Voltage:	0/2 ... 10 V DC, selectable, load max. 15 mA, short-circuit-proof (parallel with the voltage output max. 5 mA)
Rise time (T₉₀):	$\leq 150\ \text{ms}$
Accuracy:	$\leq 0.5\%$; single adjustment $\leq 0.2\%$

Housing

Version:	Polycarbonat, UL 94 V-0, TS35 acc. to DIN EN 60715:2001-09
Weight:	approx. 200 g
Connection:	screw terminals, max. 2.5 mm ²
Protection class:	Housing IP30, terminals IP20 acc. to BGV A3

Accessories and spare parts:

KA-VT

Terminal cover for measuring voltages >400 V AC

VT500-1 - 2

Greisinger		
1.	Measuring ranges	
	30	0 ... 100 / 200 / 300 / 400 / 500 / 600 V AC
		custom range on request
2.	Supply voltage	
	0	85 ... 265 V AC
	5	10 ... 30 V DC

CURRENT AND VOLTAGE MONITORING RELAY



- HIGHLIGHTS:
- Arithmetic average value measuring RMS calibrated (AC) or DC
 - Contact function min/max selectable
 - Hysteresis and time delay adjustable

CVG 500
Current and Voltage Monitoring Relay

General:	
CVG 500 monitoring relays can be used for monitoring current or voltage levels. The standard model is designed for input 0 ... 1/5 A and 0 ... 125/250 V AC/DC. Models with inputs in range of 0 ... 1 mA/ 5 A AC/DC or 0 ... 50 mV/400 V AC/DC are available.	
Specifications:	
Power supply	
Supply voltage:	230 V AC ±10 % (47 ... 63 Hz) or 24 V DC -30/+40 %
Working temperature:	-10 ... +50 °C (-25 °C ... +70 °C on request)
CE-conformity:	EN 55022, EN 60555, IEC 61000-4-3/4/5/11/13
Inputs	
Scale error:	≤2 %
Standard ranges	
Current:	0 ... 1 A and 0 ... 5 A AC (sinusoidal) or DC
R _i :	20 mΩ (5 A input) or 100 mΩ (1 A input)
Overload:	2-times, 4-times for max. 5 s
Voltage:	0 ... 125 V and 0 ... 250 V sinusoidal or DC
R _i :	600 KΩ (125 V input) or 1.2 MΩ (250 V input)
Overload:	max. 300 V AC/DC
Custom ranges	
Voltage:	end value in the range 0.05 ... 400 VAC/DC
R _i :	4.8 kΩ/V
Overload:	5-times nominal voltage, max. 500 V AC / DC
Current:	end value in the range 0.001 ... 5 A AC/DC
R _i :	= 100 mΩ ÷ (measuring range [A])
Overload:	2-times, 4-times for max. 5 s
Output	
Relay SPDT:	250 V AC <250 VA <2 A; 100 V= <50 W <1 A
Switching function:	min. / max. selectable
Hysteresis:	1 ... 25 %
Time delay:	0.1 ... 8 s
Housing	
Protection class:	Housing IP30, terminals IP20, (BGV A3)
Connection:	screw terminals, max. 2.5 mm ²

CVG500- 1 - 2 - 3

Greisinger		
1.	Current measuring ranges	
0	not installed (at custom range voltage)	
1/5	standard range 0 ... 1 A and 0 ... 5 A AC/DC	
X	custom range state in clear text	
2.	Voltage measuring ranges	
0	not installed (at custom range current)	
125/250	standard range 0 ... 125 V and 0 ... 250 V AC/DC	
X	custom range state in clear text	
3.	Supply voltage	
0	230 V AC ±10 %	
5	24 V DC -30 ... +40 %	

BATTERY VOLTAGE GUARD



- HIGHLIGHTS:
- Monitoring of battery voltages 12 V, 24 V, 48 V or 60 V
 - Alarm function under-voltage / over-voltage selectable
 - Time delay adjustable
 - Measuring voltage and supply voltage are identical

BW 500
Battery voltage guard

General:	
The BW500 is designed for monitoring of battery voltages. Undervoltage or over-voltage can be selected.	
Under-voltage: The relay switches off, if the voltage falls under the limit value and if the delay time ran off. If the voltage exceeds the limit value + hysteresis, the relay will be activated.	
Over-voltage: The relay switches on, if the voltage exceeds the limit value and if the delay time ran off. If the voltage falls under the limit value - hysteresis, the relay will be deactivated.	
Specifications:	
Power supply	
Battery voltage:	12 V, 24 V, 48 V or 60 V DC, -30 ... +40 %
Current consumption:	14 mA (24 mA at 12 V type) with activated relay
Working temperature:	-10 ... +60 °C
CE-conformity:	EN 50022, EN 60555, IEC 61000-4-4/5/11/13 vibration,- shock- and jolt-inspection acc. to IEC 68-2-6/27/29
Measuring input/measuring range	
12 V:	11 ... 14 V
24 V:	22 ... 28 V
48 V:	44 ... 56 V
60 V:	55 ... 70 V
Scale error:	≤2 %
Output	
Relay SPDT:	250 V AC <250 VA <2 A; 300 V= <50 W <2 A
Alarm function:	under-voltage/over-voltage selectable
Hysteresis:	2 ... 16 % adjustable (related to the nominal battery voltage)
Time delay:	in 2-steps switch selectable 1 ... 60 s or 5 ... 300 s adjustable
Housing:	
standard case polycarbonate 8020 UL 94 V-1 acc. to DIN EN 60715:2001-09	
Weight:	approx. 100 g
Protection class:	Housing IP30, terminal IP20, (BGV A3)
Connection:	screw terminals, max. 2.5 mm ²

BW500- 1 - 2 - 3

Greisinger		
1.	Measuring input	
	1	1 input
2.	Battery voltage / measuring scale	
	12V	11 ... 14 V
	24V	22 ... 28 V
	48V	44 ... 56 V
	60V	55 ... 70 V
3.	Option	
	00	without option

ISOLATING SIGNAL CONVERTER



TV 500

Isolating Signal Converter

General:

Isolating signal converter of the series TV 500 / ST 500 are suitable for potential isolation or for conversion of unit signals. The universal design of the in- and outputs and the wide range of supply voltage limits the devices into 2 models.

Specifications:

Power supply

Supply voltage:	100 ... 265 V AC or 10.8 ... 30 V AC/DC
Frequency AC:	47 ... 63 Hz
Power consumption:	<3.5 VA
Working temperature:	-10 ... +60 °C
CE-conformity:	EN 55022, EN 60555-2, IEC 61000-4-4/5/11/13

Inputs

Current:	0/4 ... 20 mA selectable, $R_i = 25 \Omega$, overload max. 100 mA
Voltage:	0/2 ... 10 V DC selectable, R_i approx. 40 k Ω , overload max. 100 V
Span and start value 4 mA/2 V:	adjustable approx. $\pm 5 \%$
Transmitter supply:	approx. 24 V DC, R_i approx. 150 Ω , short-circuit current approx. 35 mA

Outputs

Current:	0/4 ... 20 mA selectable, burden max. 1 k Ω
Voltage:	0/2 ... 10 V selectable, load max. 15 mA, short-circuit-proof (parallel with the current output max. 5 mA)
Rise time (T_{90}):	model 10: <20 ms, max. frequency 18 Hz model 11: <100 μ s, max. frequency 1 kHz
Accuracy:	$\leq 0.2 \%$ (single range adjustment $\leq 0.1 \%$)

Housing

Design type:	standard case polycarbonate 8020 UL94V-1 acc. to DIN EN 60715:2001-09
Weight:	approx. 200 g
Connection:	screw terminals, max. 2.5 mm ²
Protection class:	Housing IP30, terminals IP20 acc. to BGV A3

1 - 2 - 3

Greisinger		
1.	Model	
	TV500	signal converter
2.	Measuring range	
	10	inputs 0/4 ... 20 mA and 0/2 ... 10 V outputs 0/4 ... 20 mA and 0/2 ... 10 V
	11	as 10, but rise time $T_{90} < 100 \mu$ s
3.	Supply voltage	
	0	100 ... 265 V AC
	5	10.8 ... 30 V AC/DC

UNIVERSAL ISOLATING AMPLIFIER



HIGHLIGHTS:

- Safe galvanic isolation
- Step response T_{90} 40 ms
- Output deviation <0.2 % of the limit value
- Operating display and status messages via two-colour LED
- Configuration via front DIP switches
- Narrow installation width of 12.5 mm for carrier rail

TV 125 L

Universal Isolating Amplifier

General:

Isolating amplifiers of the series TV 125 L are suitable for potential isolation or for conversion of unit signals. The universal layout of the inputs and the output enables a broad range of applications with only one type of device. The plug-in terminal strips enable simple and time-saving wiring. The configuration is also quick and easy with the front DIP switches.

Specifications:

Auxiliary power

Auxiliary voltage:	18 ... 30 V DC
Power consumption:	<0.5 VA
Conformity:	CE, Richtlinie 2004/108/EG
EMV:	DIN EN 61326-1: 2013-07, Class A
Standards:	DIN EN 61010-1: 2011-07, DIN EN 61010-2: 2011-07
Rated voltage:	300 V AC/DC in accordance with DIN EN 61010-1
Test voltage:	3 kV AC, 50 Hz, 1 min

Input / Output / Auxiliary power

Environmental conditions

Working temperature:	-10 ... +60 °C
Storage temperature:	-20 ... +60 °C
Air humidity:	<95 % (no condensation)

Inputs

Voltage input:	Switchable, 0 ... 10 V or 2 ... 10 V, $R_i = 47 \text{ k}\Omega$. Max. overload 32 V AC
Current input:	Switchable, 0 ... 20 mA or 4 ... 20 mA. $R_i = 48 \Omega + 15 \Omega (R_{PTC})$. Max. overload 32 V AC/DC in accordance with DIN EN 61010-2-30

Output

Current output:	Switchable, 0 ... 20 mA or 4 ... 20 mA. Load <150 Ω
Step response:	40 ms
Standard error:	<0.2 % of final value
Temperature coefficient:	<0.01 % / K

Housing

Material:	Polyamide (PA) 6.6, UL94V-0
Weight:	91 g
Protection rating:	Housing IP30, terminals IP20 BGV A3
Colour:	light grey
Installation width:	12.5 mm
Dimensions:	108 x 114 mm (H x D)
Installation:	Carrier rail mounting TS35 DIN EN 60715

Ordering code:

TV125L - 10 - 5 - 00

SWITCH AMPLIFIER



HIGHLIGHTS:

- 1 or 2 channel version
- Safe galvanic isolation between input / output / auxiliary voltage
- Functional safety up to SIL2 EN61508
- Inputs for switching contacts, Namur initiators, or optocouplers



TS 125 und TS 225

Switch amplifier

General:

Switch amplifiers of the series TS 125 and TW 255 are used in switch cabinets for the conversion and isolation of digital switching signals, as well as in explosion-prone areas. The devices are available in one- or two-channel versions.

Passive sensors, such as switching contacts, Namur initiators, or passive electronic outputs of third-party devices, can be connected to the intrinsically safe inputs. The TS125 series in 12.5 mm wide carrier rail housing offers relay outputs with output make circuit. The TW225 series in 22.5 mm wide carrier rail housing offers relay outputs with changeover function. The plug-in terminal strips enable simple and time-saving wiring. The configuration is also quick and easy with the front DIP switches.

Specifications:

Wide-range mains: 20 ... 125 V DC and 20 ... 250 V AC, (47 ... 63 Hz), max. 1.5 W

Auxiliary voltage: 24 V DC +/- 15 % max. 1.5 W

Test voltage: 3kV AC between input / output / auxiliary voltage

Working temperature: -10 ... +60 °C

Storage temperature: -20 ... +80 °C

Air humidity: 10 ... 90 % (non-condensing)

Measuring inputs (in accordance with EN60947-5-6 Namur)

Open circuit voltage: approx. 8 V

Short circuit voltage: approx. 8 mA

Switching points: inactive <= 1.2 mA, active >= 2.1 mA, hyst. < > 0.5 mA

Error recognition: Wire break: <0.2 mA, short circuit: >7 mA

Relay outputs:

Switching voltage: <250 V AC <2 A <500 VA, <125 V DC <0.2 A <25 W, <30 V DC <2 A <60 W

Switching frequency: max. 5 Hz

Delay: max. 30 ms

Housing

Dimensions (W x D x H): TS125: 12,5 x 114 x 108 mm, TS225: 22,5 x 114 x 108 mm

Protection rating: IP20

Terminals: 0.2 ... 2.5 mm², AWG 24 ... 14, removable coded terminals

Explosion protection: specific data on request

Functional safety: SIL2 in accordance with EN61508

TS - **1** - **2** - **3**

Greisinger		
1.	Device version	
	125L	Housing width 12.5 mm, Relay NO contacts, Auxiliary voltage 24 V DC +/- 15 %
	125M	Housing width 12.5 mm, Relay NO contacts, Wide-range mains adapter
	225M	Housing width 22.5 mm, Relay changeover contacts, Wide-range mains adapter
2.	Explosion protection	
	00	Installation of the device TV125L in Zone 2 permitted, in accordance with ATEX ignition protection rating, 'n'
	Ex	With installation of the devices outside the Ex area: Inputs intrinsically safe in accordance with ATEX ignition protection rating, 'ia' for Zones 0 and 20. The device TS125L may be installed in Zone 2 in accordance with ATEX ignition protection rating, 'ic'.
3.	Number of channels	
	1	Single channel
	2	Dual channel
	F	Single channel with additional error relay or parallel relay

LIMIT VALUE SWITCH



HIGHLIGHTS:

- Universal input for unit signals,
- Pt100, thermocouple, potentiometer, switchable via front-side DIP switch
- 2-colour illuminated scales for limit value adjustment, colour depends on switch status



colour depends on switch status

GS 125

Limit value switch

General:

Limit value switches of the series GS125 are used in switch cabinets for process monitoring or for simple process regulation. Both temperatures and derived variables such as voltage, current and resistance are used as control signals. In the process, 1 or 2 limit values can be monitored. For assignment of the measuring unit to the scale labelling, 24 transparent adhesive labels are supplied. They can be glued between the adjusting wheels on the front panel.

Specifications:

Measurement inputs Switchable via DIP switch

Unit signals: 0/2 ... 10 V, 0/4 ... 20 mA

Potentiometer: 500 Ω ... 20 kΩ

Pt100: -50 ... +50 °C, 0 ... 50 °C, 0 ... 100 °C, 0 ... 150 °C, 0 ... 200 °C, 0 ... 300 °C, 0 ... 500 °C

Thermocouple: FeCuNi, Type J: 0 ... 250 °C, 0 ... 500 °C
NiCrNi, Type K: 0 ... 500 °C, 0 ... 750 °C, 0 ... 1000 °C
PtRhPt, Type S: 0 ... 1500 °C

Wide-range power supply

24 V power supply

Rated voltage: 253 V AC

Test voltage: 3kV AC between input/relay output/auxiliary voltage

Working temperature: -10 ... +60 °C

Storage temperature: -20 ... +80 °C

Air humidity: 10 ... 90 % (non-condensing)

Relay outputs

Switching voltage: <250 V AC <2 A <500 VA, <125 V DC <0.2 A <25 W, <30 V DC <2 A <60 W

Switching frequency: max. 5 Hz

Switching hysteresis: approx. 1 %

Functional safety: SIL2 in accordance with EN61508 (specific data available on request)

Setpoint setting: Skalengenauigkeit: 2 %

Actual value output: 4 ... 20 mA, Bürde max. 120 Ω, keine galvanische Trennung zum Eingangssignal

Accessories and spare parts:

PRVK

Power Rail supply terminal

GS - **1** - **2** - **3** - **4**

Greisinger		
1.	Device version	
	125L	Power supply 24 V DC +/- 15 %
	125LP	Power supply 24V DC +/-15% with carrier rail bus connection
	125M	Wide-range power supply 20 ... 125 VDC / 20 ... 253 V AC
2.	Limit value contacts	
	1	1 relay (changeover contact)
	2	2 relays (universal connection)
	3	2 relays (potential-free n.o. contacts)
3.	Actual value output	
	0	not provided
	1	Output 4 ... 20 mA
4.	Options	
	01	No options
	01	Push-in terminals (plug-in)

AC CURRENT TRANSMITTER



HIGHLIGHTS:

- 1- and 2-channel device
- Measuring ranges 0 ... 1 A / 0 ... 5 A AC
- Arithmetic average value measurement RMS calibrated
- Frequency range 45 ... 400 Hz
- Loop voltage 14 ... 30 V DC

CT 500 P

AC Current Transmitter

General:

The transmitter converts AC current from 0 ... 1 A or 0 ... 5 A to the proportional standard signal 4 ... 20 mA. The measurement method is calibrated an arithmetic averaging on RMS. The CT 500 P operates like an 2-wire transmitter, which is supplied from the measuring device (e.g. SPS input circuit board). Small housing width allows a space-saving installation.

Specifications:

Power supply

Loop voltage: 14 ... 30 V DC**Working temperature:** -10 ... +60 °C**CE-conformity:** EN55022, EN60555, IEC61000-4-4/5**Input:** 1- or 2-channels**Current:** 0 ... 1 A or 0 ... 5 A AC, overload max. 10 A**R_i:** <20 mΩ**Frequency:** 45 ... 400 Hz fundamental wave, 16_{2/3} Hz on request**End value:** adjustable ±5 %

Output

Current: 4 ... 20 mA, burden R_{max} = (UB - 14 V) ÷ 20 mA**Rise time (T₉₀):** ≤1 s**Accuracy:** ≤0.2 %

Housing

Version: Makrolon standard enclosure 8020 UL 94 V-1 acc. to DIN EN 60715:2001-09**Weight:** approx. 200 g**Connection:** screw terminals, max. 2.5 mm²**Protection class:** Housing IP30, terminals IP20 acc. to BGV A3

Accessories and spare parts:

KA-500

Terminal cover for measuring voltages >400 V AC

CT500P- **1** - **2** - **3**

Greisinger		
1.	Number of channels	
	1	
	2	
2.	Input direct connection / via transformer	
	0	1 A
	5	5 A
3.	Options	
	00	without option

ANALOG FREQUENCY TRANSMITTER



HIGHLIGHTS:

- Output frequency from 0 ... 0.01 Hz / 20 kHz programmable
- Inputs for 0/4 ... 20 mA, 0/2 ... 10 V DC
- Teach-in programming for analog start- and end value
- Outputs transistor and relay SPDT
- Power- and programming indicator via 2-color LED

AF 500

Analog Frequency Transmitter

General:

Analog frequency transmitter AF 500 converts standard industry signals 0/4 ... 20 mA or 0/2 ... 10 V DC into a proportional frequency. The output frequency is programmable with rotary switches at the case side.

Specifications:

Power supply

Supply voltage: 230 V AC ±10 % or 24 V DC ±15 %**Frequency AC:** 47 ... 63 Hz**Power consumption:** <3 VA**Working temperature:** -10 ... +60 °C**CE-conformity:** EN 55022, EN 60555, IEC 61000-4-4/5/11/13

Input

Current: 0/4 ... 20 mA, switch selectable**Internal resistance:** R_i = 51 Ω**Voltage:** 0/2 ... 10 V DC, switch selectable**Internal resistance:** R_i = 20 kΩ**Start value:** via software programmable 0 ... +25 %**End value:** via software programmable -15 ... +10 %

Output

Transistor: max. 30 V DC, load max. 30 mA**Frequenzbereich:** 0 ... 0,01 Hz, 0 ... 20 kHz Tastverhältnis 0,5**Relais:** 250 V AC <250 VA <2 A, 100 V = <50 W <1 A**Frequency range:** 0 ... 0.01 Hz, 0 ... 20 kHz duty cycle 0.5**Accuracy:** 0.1 % of the end value

Housing

Version: Makrolon standard enclosure 8020 UL 94 V-1 acc. to DIN EN 60715:2001-09**Weight:** approx. 140 g**Connection:** screw terminal, max. 2.5 mm²**Protection class:** Housing IP30, terminals IP20 acc. to BGV A3AF500- **1** - **2** - **3**

Greisinger		
1.	Measuring range	
	10	0/4 ... 20 mA, 0/2 ... 10 V DC output frequency from 0 ... 0.01 up to 20 kHz
2.	Supply voltage	
	0	230 V AC ±10 %
	5	24 V DC ±15 %
3.	Options	
	00	without option

FREQUENCY ANALOG TRANSMITTER



HIGHLIGHTS:

- Frequency ranges from 0 ... 0.01 Hz / 20 kHz programmable
- start- and end value of the measuring range programmable
- Multipurpose inputs for 24 V sensors, switching contacts and Namur actors
- Integrated transmitter supply

FT 500

Frequency Analog Transmitter

General:

Frequency transmitter FT 500 are used to convert an impulse frequency range into industry standard signals. The transmitter accepts impulses from proximity switch, contact switch, light barriers and Namur proximity switches. Start- and end value will be programmed with 5 rotary switches. The setting of intermediate values occurs at the front trim. Increasing or decreasing output characteristic is therefore programmable.

Specifications:

Power supply

Supply voltage: 85 ... 265 V AC or 10 ... 30 V AC / DC

Frequency AC: 47 ... 63 Hz

Power consumption: <4 VA

Working temperature: -10 ... +60 °C

CE-conformity: EN 55022, EN 60555, IEC 61000-4-4/5/11/13

Input

Frequency range: 0 ... 0.01 Hz / 20 kHz

Pulse cycle

pulse / stop: min. 20 µs (electronic) and min. 5 ms (contacts)

Start value: programmable 0 ... +25 %

End value: programmable -15 ... +5 %

Impulse input

(Terminals 2, 3): Low-Signal -30 V ... +3 V, High-Signal +10 V ... +35 V

Input resistance: $R_i > 10 \text{ k}\Omega$

Transmitter supply

(Terminal 1): approx. 20 V DC, 25 mA short circuit current

Namur input

(Terminal 4, 5): acc. to DIN 19234, Namur

input resistance: approx. 1 kΩ

Output

Current: 0/4 ... 20 mA selectable, burden $\leq 1 \text{ k}\Omega$

Voltage: 0/2 ... 10 V DC, load max. 10 mA, short-circuit-proof (parallel with current output, 5 mA)

Accuracy: 0.1 % Measuring end value

Rise time (T_{90}): <130 ms

Housing

Version: Makrolon standard enclosure 8020 UL 94 V-1 acc. to DIN EN 60715:2001-09

Weight: approx. 140 g

Connection: screw terminals, max. 2.5 mm²

Protection class: case IP30, terminals IP20, acc. to BGV A3

FT500- 1 - 2 - 3

Greisinger		
1.	Measuring range	
	70	einstellbare Frequenz-Messbereiche von 0 ... 0.01 Hz up to 20 kHz, output 0/4 ... 20 mA and 0/2 ... 10 V DC
2.	Supply voltage	
	0	85 ... 265 V AC
	5	10 ... 30 V AC / DC
3.	Options	
	00	without option

PH HEAD-TRANSMITTER



HIGHLIGHTS:

- Measuring range -1 ... +15 pH
- 2-wire transmitter 4 ... 20 mA
- Error free measurement up to 100 m

pH 40

pH Head-Transmitter

General:

The head transmitter PH 40 provides a cost-effective way of pH measurement. It is simply plugged on the pH sensor with „Überwurfmutter“. The electrical connection is via the 8-pole. Circular Connectors. Depending on the execution is the signal from the pH sensor issued with either a low output impedance or available as galvanically isolated 4 ... 20 mA signal is available.

Specifications:

Power supply

Supply voltage: 5 ... 30 V DC output 0
10 ... 30 V DC output 2

Working temperature: -10 ... +60 °C

Input pH / Redox

Measuring ranges: -1 ... +15 pH / $\pm 1500 \text{ mV}$

Input resistance: $> 10^{12} \Omega$

Output

Type 1: 1:1 transfer of the pH-signal with low output impedance, error free measurement up to 100 m

Type 2: 4 ... 20 mA, 2-wire technology in the range -1 ... +15 pH depending at 25 °C, zero-point pH 7.0, slope 59.2 mV/pH, not compensated

Accuracy: type 0 = 0.01 %, type 2 = 0.2 %

Housing

Material: PVC-U

Weight: approx. 100 g

Process connection: S7

Electrical connection: 8 pole round socket

Protection class: IP65

Accessories and spare parts:

SKM8E-02

2 m IP67, connection cable terminated with 8-pin. Cable socket and open on one side with ferrules, PU cable

SKM8E-05

5 m IP67, connection cable terminated with 8-pin. Cable socket and open on one side with ferrules, PU cable

SKM8E-10

10 m IP67, connection cable terminated with 8-pin. Cable socket and open on one side with ferrules, PU cable

SKM8E-25

25 m IP67, connection cable terminated with 8-pin. Cable socket and open on one side with ferrules, PU cable

Ordering code:

pH40 - 0 - 2 - 00

Output: -1 ... +15 pH, 1:1 signal transfer

pH40 - 2 - 2 - 00

Output: 4 ... 20 mA = -1 ... +15 pH

CVC-AMPLIFIER



CVC-02/0201

CVC-Amplifier

General:

The CVC-amplifier is used for potential-free signal processing and filtering of currents. For this, two channels per board are available. About pluggable filter modules, the signal can be filtered in any specified frequency range. For an input current range of ± 2 A, the output voltage is ± 1 V. The functionally reliable supply voltage range is 6 ... 18 V DC.

Specifications:

Supply voltage	12 V DC
Specified range	6 ... 18 V DC
Power consumption at nominal voltage (without sensor / without load)	45 mA
Electrical isolation (3-way isolation)	1000 V DC
Accuracy (typ.):	0.1 %
Cut-off frequency (standard / maximum)	5 kHz / 10 kHz
Linearity (typical):	0.02 %
Input – Current	± 2 A
Input range	
Output – Voltage	
Output range	± 1 V
max. Current output	± 10 mA
short circuit proof	ja
Residual ripple	
$f_g = 1$ kHz	typ. 10 mV _{pp}
$f_g = 10$ kHz	typ. 15 mV _{pp}
Environmental temperature:	0 ... 50 °C
Plug-in filter	10, 30, 50, 100, 300, 500, 1 k, 3 k, 5 k, 10 k
Standard frequencies in Hz:	
Connectivity	Spring-loaded terminals
Rated Current IN	9 A
Wire Gauge flexible	0.2 ... 1 mm ²
Wire Gauge solid	0.2 ... 1.5 mm ²
Housing:	100 x 33 x 21 mm (W x H x D)
Scope of supply:	Device, manual

CVC- 1 - 2 - 3 - 4 - 5

Greisinger	
1.	Model
02	2 Channels
2.	Input
02	± 2 A
3.	Output
01	± 1 V
4.	Ausgangsfrequenz(en) in Hz
XXX	Enter standard values: 10, 30, 50, 100, 300, 500, 1 k, 3 k, 5 k, 10 k
YY	Enter non-standard value: 1 ... 30 k
5.	Filter characteristics
BW	Butterworth 4th order
BS	Bessel 4th order

TSA-PWR MODULE



TSA-PWR

TSA-PWR module

General:

The TSA-PWR module is used for control of loads up to a power of 2 W at a current of up to 200 mA. Depending on the application, the required configuration must be specified.

Specifications:

Supply voltage:	24 V DC (10 ... 30 V DC)
Power consumption at nominal voltage (without sensor / without load)	100 mA
Electrical isolation (3-way isolation)	1000 V DC
Accuracy	0.1 %
Cut-off frequency (standard / maximum)	5 kHz / 10 kHz
Linearity (typical)	0.02 %
Input – Voltage	
Input range (V1 / V2)	± 10 V / 0 ... 10 V
Input resistance	10 M Ω
Input – Current	
Input range (A1 / A2 / A3)	± 20 mA / 0 ... 20 mA / 4 ... 20 mA
Input resistance	50 Ω
Output – Voltage	
Output range (V10)	± 10 V / 0 ... 10 V
Output – Current	
Output range (A5 / A6)	± 200 mA / 0 ... 200 mA
Max. load current (U output)	± 200 mA
Residual ripple	
$f_g = 1$ kHz	typ. 10 mV _{pp}
$f_g = 10$ kHz	typ. 15 mV _{pp}
Environmental temperature	0 ... 50 °C
Plug-in filter	10, 30, 50, 100, 300, 500, 1 k, 3 k, 5 k, 10 k
Standard frequencies in Hz	
Housing:	ME 22.5: 22.5 x 99 x 114.5 mm (W x H x T)
Scope of supply:	Device, manual

TSA-PWR- 1 - 2 - 3 - 4 - 5

Greisinger	
1.	Model
1	1 Output
2.	Input (not all combinations with output feasible)
V1	± 10 V
V2	0 ... 10 V
A1	± 20 mA
A2	0 ... 20 mA
A3	4 ... 20 mA
3.	Output filter frequencies (Hz)
XXX	Enter standard values: 10, 30, 50, 100, 300, 500, 1 k, 3 k, 5 k, 10 k
YY	Sonderwert einzusetzen: 1 ... 30 k
4.	Filter characteristics
BW	Butterworth 4th order
BS	Bessel 4th order
5.	Output (not all combinations with input feasible)
V10	± 10 V (I = max. ± 200 mA)
A5	± 100 mA
A6	± 200 mA

TEMPERATURE MEASURING TRANSDUCER



HIGHLIGHTS:

- Universal input for Pt100, Pt1000, thermocouple, NTC and resistance measurement value
- Configuration via front DIP switches
- Analog actual value output 4 ... 20 mA
- Zero point and limit value can be adjusted via trim potentiometers on the front
- With Pt100 and Pt1000 sensors, monitoring of sensor break and short-circuit
- Wide-range power supply or 24 V DC
- Optional supply via carrier rail bus
- Removable coded screw terminals or optional push-in terminals
- Housing width 12.5 mm
- Carrier rail mounting TS35 EN60715

MU 125

Temperature Measuring Transducer

General:

Devices of the MU125 series convert a temperature measurement value or resistance measurement value from various sensors to a current signal of 4 ... 20 mA. The universal configurability of the measuring inputs reduces the stock requirement for various applications. The housing width of only 12.5 mm enables space-saving installation in the switch cabinet.

Specifications:

Wide-range power supply

Supply voltage: 20 ... 125 V DC and 20 ... 250 V AC (47 ... 63 Hz), max. 1.5 W

24 V power supply

Supply voltage: 24 V DC +/- 15 %, max. 1.5 W

Combined data

Rated voltage: 253 V AC

Test voltage: 3 kV AC between supply // input = output

Working temperature: -10 ... +60 °C

Storage temperature: -20 ... +80 °C

Humidity: 10 ... 90 % (no condensation)

Measurement inputs

Pt100: linearised, measuring current approx. 1.6 mA

Pt1000: linearised, measuring current approx. 130 µA
In the event of a sensor break or short circuit, the analog output drops to 0 mA. The operation LED blinks red.

Thermocouple: linearised with comparison position compensation (optionally without internal compensation)

NTC: linearised for $B_{25/85}=3977$ K or 3528 K
Max. load 200 µW (averaged)

Linear resistance: Mb. 0 ... 2 kΩ: approx. 1.4 mA
Mbs. 0 ... 5 kΩ, 0 ... 10 kΩ: approx. 300 µA

Zero point setting: +/- 40 % of the factory measuring range (= end value – start value) via 12-turn trim potentiometer

End value reduction: -50 % based on the factory end value via 12-turn trim potentiometer; Note: The measuring accuracy drops proportionally with the narrowing of the measuring range

Potentiometer setting limits: Limitation of the aforementioned adjustment ranges
Pt100: -50 ... +500 °C (... +600 °C)
Pt1000: -50 ... +250 °C (... +300 °C)
FeCuNi: -100 ... +500 °C (... +800 °C)
NiCrNi: -150 ... +1250 °C
PtRhPt: 0 ... 1500 °C (... +1600 °C)
NTC (10 kΩ): -20 ... +100 °C (... +150 °C)
NTC (2 kΩ): -40 ... +100 °C (-50 °C ... +150 °C)
R linear: 0 ... 10 kΩ
(values in parentheses apply for optional, customer-specific special measuring ranges that are configured at the factory)

Analog output: 4 ... 20 mA, max. burden 400 Ω, no galvanic isolation from the input signal (max. burden error of 0.2 % at 400 Ohm)

Dimensions: 12,5 x 114 x 108 mm (W x D x H)

Material: PA6.6, light grey, Flammability class V0 (UL94)

Weight: 120 g

Protection rating: IP20

Screw terminals: 0.2 ... 2.5 mm², AWG 24 ... 14, removable, coded

Push-in terminals: (spring-type terminals) 0.5 ... 1.5 mm², AWG 25 ... 16, Double connection (12 A between the connections), removable, coded

Power Rail: 8 A over the entire bus system (power supply via removable terminals 0.2 ... 2.5 mm², AWG 24 ... 14)

Accessories and spare parts:

PRVK

Power Rail supply terminal

A service mode for the trim potentiometers on the front offers the following possibilities:

- 1) A check of whether potentiometers are positioned at the calibrated factory settings
- 2) The pre-adjustment of a new output characteristic curve only with connection of a current measuring device only. (a temperature calibrator is not necessary)
- 3) Specification of a constant value at the current output, e.g. in order to test the reaction of connected devices. (Limited range from 5.6 ... 20 mA)

MU - **1** - **2**

Greisinger		
1.	Device version	
	125L	Supply voltage 24 V DC +/- 15 %
	125LP	Supply voltage 24 V DC +/- 15 % with carrier rail bus connection
	125M	Wide-range power supply 20 ... 125 V DC / 20 ... 253 V AC
2.	Options	
	00	No options
	01	Push-in terminals (plug-in)

UNIVERSAL TRANSMITTER



HIGHLIGHTS:

- Transmitter for electrical signals
- Universal input for standard signals, Pt100, thermocouple, potentiometer, configuration via front-side DIP switch
- Analog output 4 ... 20 mA
- With Pt100 sensors, monitoring of sensor break and short-circuit
- Wide-range power supply or 24 V DC
- Housing width 12.5 mm
- Removal coded screw terminals
- Carrier rail mounting TS35 EN60715

UT 125

Universal Transmitter

General:

The UT 125 series of universal transmitters are designed for the affordable transformation of standard signals, temperatures and potentiometer statuses into a current signal of 4 ... 20 mA. The universal configurability of the measuring inputs reduces the stock requirement for various applications. The measuring inputs and actual value output are not galvanically isolated. The housing width of only 12.5 mm enables space-saving installation in the switch cabinet.

Specifications:

Wide-range power supply

Supply voltage: 20 ... 125 V DC and 20 ... 250 V AC (47 ... 63 Hz), max. 1.5 W

24 V power supply

Supply voltage: 24 V DC +/- 15 %, max. 1.5 W

Combined data

Rated voltage: 253 V AC

Test voltage: 3 kV AC between power supply // input = output

Working temperature: -10 ... +60 °C

Storage temperature: -20 ... +80 °C

Air humidity: 10 ... 90 % (no condensation)

Measurement inputs

Voltage: 0/2 ... 10 V, R_i approx. 20 k Ω

Current: 0/4 ... 20 mA, R_i approx. 60 Ω

Pt100: linearised, measurement current 1.6 mA; recognition of sensor break or short circuit: Actual value drops to approx. 0 mA

Thermocouple: linearised with comparison point compensation

Resistance: Potentiometer (3-wire), rated value 500 Ω ... 20 k Ω , Intern. reference voltage approx. 1.5 V

Actual value output: 4 ... 20 mA, max. burden 400 Ω , no galvanic isolation from the input signal

Input signal	Basic precision	actual value output	Temperature deviation*)
0/2 ... 10 V	0.2 %		0.004 % / K
0/4 ... 20 mA	0.2 %		0.004 % / K
Potentiometer	1 %		0.007 % / K
Pt100 -50 ... +50 °C	0.5 %		0.03 % / K
Pt100 0 ... 50 °C	0.9 %		0.04 % / K
Pt100 0 ... 100 °C	0.5 %		0.03 % / K
Pt100 0 ... 150 °C	0.2 %		0.02 % / K
Pt100 0 ... 200 °C	0.4 %		0.02 % / K
Pt100 0 ... 300 °C	0.3 %		0.01 % / K
Pt100 0 ... 500 °C	0.2 %		0.007 % / K
FeCuNi 0 ... 250 °C	1.0 %		0.04 % / K
FeCuNi 0 ... 500 °C	0.5 %		0.03 % / K
NiCrNi 0 ... 500 °C	0.5 %		0.04 % / K
NiCrNi 0 ... 750 °C	0.4 %		0.03 % / K
NiCrNi 0 ... 1000 °C	0.3 %		0.02 % / K
PtRhPt 0 ... 1500 °C	1.0 %		0.04 % / K

Measurement deviation depending on the environmental temperature in the switch cabinet (-10 ... +60 °C)

Housing

Dimensions: 12.5 x 115 x 108 mm (W x D x H)

Material: PA6.6, light grey, Flammability class V0 (UL94)

Weight: 120 g

Protection rating: IP20

Screw terminals: 0.2 ... 2.5 mm², AWG 24 ... 14, removable, coded

Push-in terminals: (spring-type terminal) 0.5 ... 1.5 mm², AWG 25 ... 16, double connection (12 A between the connections), removable, coded

Power Rail: 8 A over the entire bus system (Supply via removable terminals 0.2 ... 2.5 mm², AWG 24 ... 14)

Accessories and spare parts:

PRVK

Power Rail supply terminal

UT - 1 - 2

Greisinger		
1.	Device version	
	125L	Supply voltage 24 V DC +/- 15 %
	125LP	Supply voltage 24 V DC +/- 15 % with carrier rail bus connection *)
	125M	Wide-range power supply 20 ... 125 V DC / 20 ... 253 V AC
2.	Options	
	00	No options
	01	Push-in terminals (plug-in)

*) Supply including matching bus adapter piece

UNIVERSAL ISOLATING AMPLIFIER



TV 125M / ST 125M

Universal Isolating Amplifier

General:

Isolating amplifiers of the series TV/ST125M are suitable for potential isolation or for conversion of unit signals. The universal configuration of the inputs and output and the internal power supply by means of wide-range power supply enable a broad spectrum of use with only one device type. The power supply can optionally take place via a carrier rail bus connector. The push-in terminal enable simple and time-saving wiring. The configuration is also quick and easy with the front DIP switches.

Device version ST 125 is also provided with a transmitter feed for external 2, 3 and 4-wire sensors.

Specifications:

Explosion protection:

Gas:	II (1) G [Ex ia Ga] IIC/IIB
Dust:	II (1) D [Ex ia Da] IIIC
Intrinsically safe + Zone 2:	II 3 G nA nC [ic] IIB T4 Gc *
Protection rating, n':	II 3 G nA nC IIB T4 Gc X *

*) Manufacturer's certificate, requires installation in an earthed, conductive housing (minimum protection rating IP54)

Limit values of intrinsically safe power circuits:

ST125M(MP)-Ex (Terminal 51, 52)
U0: 25.9 V
I0: 92.6 mA
P0: 598 mW
Max. inductivity capacity
Ci: 1 nF
Li: 240 nH
IIB / IIIC
C0: 769 nF
L0: 8 mH
IIC
C0: 99 nF
L0: 2 mH

Auxiliary voltage

Wide-range power supply: 20 ... 125 V DC / 85 ... 253 V AC (47 ... 63 Hz), <4 VA

Supply via power rail: 24 V DC +/-15 %, <2 W

Environmental conditions

Working temperature: -10 ... +60 °C

Storage temperature: -20 ... +80 °C

Air humidity: 10 ... 90 % (no condensation)

Inputs

Voltage input: switchable, 0 ... 10 V or 2 ... 10 V.
R_i = 30 kΩ, max. overload 26 V AC/DC

Current input: switchable, 0 ... 20 mA or 4 ... 20 mA.
R_i = 51 Ω, max. overload. 94 mA

Measuring range / Zero point: adjustable ±2 %

Output

Voltage output: 0 ... 10 V or 2 ... 10 V switchable, resistance >500 Ω.

Current output: 0 ... 20 mA or 4 ... 20 mA switchable, burden < 600 Ω.

Step response: 40 ms

Standard error: <0.2 % of final value

Temperature coefficient: <0.01 % / K

HIGHLIGHTS:

- Standard inputs and outputs with adjustment function
- Safe galvanic isolation between input / output / auxiliary voltage with reinforced isolation in accordance with DIN EN 61010-1
- Wide-range power supply, Power supply via power rail
- Output deviation <0.2 %
- Operating display and status messages via two-colour LED
- Configuration via front DIP switches
- Removable coded screw terminals or optional push-in terminals
- Narrow installation width of 12.5 mm
- Carrier rail mounting TS 35
- Functional safety up to SIL2 EN61508
- Intrinsically safe input for connection of sensors in Ex Zones 0 and 20
- Device installation in Ex Zone 2 possible

Transmitter power

supply (only ST125M): >15 V DC with 20 mA output current, R_i = 300 Ω

Housing

Material:	Polyamide (PA) 6.6, UL94V-0
Weight:	91 g
Protection rating:	Housing IP30, terminals IP20 BGV A3
Colour:	light grey
Installation width:	12.5 mm
Dimensions:	108 x 114 mm (H x D)
Installation:	Carrier rail mounting TS35 DIN EN 60715

Functional safety:

Level:	Sil 2 (parameters acc. to EN 61508 and SN 29500) for input range 4 ... 20 mA or 2 ... 10 V and output range 4 ... 20 mA or 2 ... 10 V
Device type:	B
HFT:	0
Error message:	Output 0 V or 0 mA
Response time:	Normal operation -> Error: 40 ms, Error -> Normal operation: 1 s (self-resetting)

Accessories and spare parts:

PRVK

Power Rail supply terminal

1 - 2 - 3 - 4

Greisinger		
1.	Geräteausführung	
	TV125M	Wide-range power supply
	TV125MP	Carrier rail bus connection, supply voltage 24 V DC +/-15 %
	ST125M	Transmitter power supply, wide-range power supply
	ST125MP	Transmitter power supply, carrier rail bus connection, supply voltage 24 V DC +/-15 %
2.	Explosion protection	
	00	No intrinsically safe input and not intrinsically safe transmitter feed (The devices TV125MP and ST125MP must be installed in Zone 2 according to ATEX ignition protection type „n“)
	Ex	With installation of the devices outside the Ex area: Inputs intrinsically safe in accordance with ATEX ignition protection rating „ia“ for Zones 0 and 20 The devices TV125MP and ST125MP must be installed in Zone 2 according to ATEX ignition protection type „ic“
3.	Input	
	10	0/2 ... 10 V / 0/4 ... 20 mA
4.	Options	
	00	No options
	01	Push-in terminals (plug-in)



	GTT ..	GTF 101-5...	GTF 101-N...	GTF 101...	GTF 102...	GTF 103...	GTF 10x-EX	GTF 111	GTF 112	GTF 11x-EX	TF 101 ...	GOF 1xx ...
APPLICATION:												
NiCr-Ni (Type K)	•	•		•	•	•	•				•	•
NiCrSi-NiSi (Type N)			•									
Pt100				•	•	•	•	•	•	•	•	•
Pt1000				•	•	•	•	•	•	•	•	•
Miniature flat-pin plug	•	•	•	•	•						•	•
Loose ends	•	•	•	•	•		•				•	•
M12-plug, 4-pol.								•	•	•		
Sensor head						•	•					
Ex-Protection							•			•		
Sheath thermocouple	•	•										
Permanent high temperatures			•									
Industrial probes, process connection without thread	•	•	•	•		•	•	•		•		
Industrial probes, process connection with thread					•	•	•		•	•		
Hermetically sealed probe											•	
Self-adhesive probes												•


Additional information The protection rating is basically IP65; a higher or lower rating is possible depending on the variant

DEVICE INFORMATION:


Catalogue page	Page 206	Page 207	Page 213	Page 208	Page 210	Page 211	Page 214	Page 212	Page 212	Page 216	Page 217	Page 218
----------------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------

Note: Handheld instrument probes can be found in chapter handheld instruments and the appropriate devices

STANDARD - JACKET THERMO ELEMENTS TYPE K (NICR-NI)

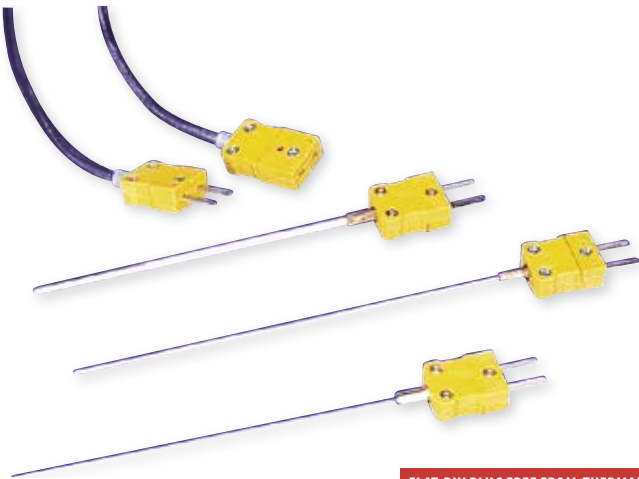

FLAT-PIN PLUG FREE FROM THERMAL E.M.V.



GTT-xx-xxxx

Jacket thermo elements type K (NiCr-Ni) complete with miniature flat-pin plug NST1200 (free from thermal e.m.f.)

Specifications:

Jacket material:	Inconel 600, flexible - other materials upon request
Insulation:	highly compressed pure MgO
Thermo wires:	NiCr-Ni, DIN IEC 584, welding insulated (volt-free)
Accuracy:	optimum accuracy (cl. 1) = ±1.5 °C or ±0.4 % of measuring value (Almost double accuracy as compared to class 2. As a comparison with class 2: ±2.5 °C or ±0.75 % of measuring value)
Temperature application range:	-220 ... +1150 °C (Probe tip and front part; wire outlet: max. 200 °C) (Accuracy class 1 applicable from -40 ... +1000 °C)

Recommended upper temperature limit for continuous use:			
Ø	.5	1.0	1.5
°C	700	700	920

Accessories and spare parts:

NKU1200 Art. no. 602737 coupling free from thermal e.m.f.
NKU1200O Art. no. 602738 U-coupling free from thermal e.m.f.
VKA-1m Art. no. 602909 plug-in extension cable

- HIGHLIGHTS:
- Same material for contacts and thermo elements
 - No incorrect temperature values due to different materials
 - Polarity cannot be mixed up
 - One plug size for Ø from 0.5 ... 6.0 mm
 - Any extension possible (extension cable VKA-1m or length per customers' requests)
 - Sensor elements can be exchanged easily

ALSO IN TYPE N AVAILABLE

Type:	Ø mm	EL mm
GTT-05-0150 Art. no. 607542	0.5	150
GTT-05-0250 Art. no. 607543		250
GTT-05-0500 Art. no. 607544		500
GTT-05-1000 Art. no. 607545		1000
GTT-05-1500 Art. no. 607546		1500
GTT-10-0150 Art. no. 607547	1.0	150
GTT-10-0250 Art. no. 607548		250
GTT-10-0500 Art. no. 607549		500
GTT-10-1000 Art. no. 607550		1000
GTT-10-1500 Art. no. 607551		1500
GTT-15-0150 Art. no. 607552	1.5	150
GTT-15-0250 Art. no. 607553		250
GTT-15-0500 Art. no. 607554		500
GTT-15-1000 Art. no. 607555		1000
GTT-15-1500 Art. no. 607556		1500
GTT-30-0150 Art. no. 607557	3.0	150
GTT-30-0250 Art. no. 607558		250
GTT-30-0500 Art. no. 607559		500
GTT-30-1000 Art. no. 607560		1000
GTT-30-1500 Art. no. 607561		1500
GTT-60-0150 Art. no. 607562	6.0	150
GTT-60-0250 Art. no. 607563		250
GTT-60-0500 Art. no. 607564		500
GTT-60-1000 Art. no. 607565		1000
GTT-60-1500 Art. no. 607566		1500

Special sizes upon request.


All thermo elements accuracy class 1 (Almost double accuracy than class 2!)

STANDARD - JACKET THERMO ELEMENTS TYPE K (NICR-NI)



HIGHLIGHTS:

- Can be subjected to high temperatures and pressures
- Resistant to aggressive atmospheres
- Minimum dimensions, therefore short response times
- Flexible (the smaller the diameter the smaller the bending radii)
- Potential-free (thermoelement wires have no connection to the outer jacket)
- Optimum accuracy acc. to DIN IEC584 class 1



$L = 1 \text{ m}$, for other cable length or other accessories p.r.t. accessories

GTF101-5-xx-xxxx

Jacket thermo elements type K (NiCr-Ni) complete with cable sleeve and 1 m silicone cable (compensation line), loose wire ends

Specifications:

Jacket material:	Inconel 600, flexible (standard)
Insulation:	highly compressed pure MgO
Thermo wires:	NiCr-Ni, DIN IEC 584, welding insulated (volt-free)
Accuracy:	optimum accuracy (cl. 1) = $\pm 1.5^\circ\text{C}$ or $\pm 0.4\%$ of measuring value (Almost double accuracy as compared to class 2. As a comparison with class 2: $\pm 2.5^\circ\text{C}$ or $\pm 0.75\%$ of meas. value)
Connecting cable:	silicone compensation line, 1 m long (max. 200°C), loose ends
Temperature application range:	$-220 \dots +1150^\circ\text{C}$ (Probe tip and front part; wire outlet: max. 200°C , for cable p.r.t. accessories) (Accuracy class 1 applicable from $-40 \dots +1000^\circ\text{C}$)

Recommended upper temperature limit for continuous use:

$\emptyset$	0.5	1.0	1.5
$^\circ\text{C}$	700	700	920

Accessories and spare parts:

Clamping screw connection
 $\emptyset$ 1.5, 3.0 or 6.0 mm, see accessories

NST1200 „K“

Prefabricated flat connector
Please specify when ordering

Special sizes and other connection cables see
industry temperature probe type GTF 101 K

All thermo elements accuracy class 1
(Almost double accuracy than class 2!)

Type:	$\emptyset$ mm	EL mm
GTF101-5-05-0150 Art. no. 607596	0.5	150
GTF101-5-05-0250 Art. no. 607597		250
GTF101-5-05-0500 Art. no. 607598		500
GTF101-5-05-1000 Art. no. 607599		1000
GTF101-5-05-1500 Art. no. 607600		1500
GTF101-5-10-0150 Art. no. 607601	1.0	150
GTF101-5-10-0250 Art. no. 607602		250
GTF101-5-10-0500 Art. no. 607603		500
GTF101-5-10-1000 Art. no. 607604		1000
GTF101-5-10-1500 Art. no. 607605		1500
GTF101-5-15-0150 Art. no. 607606	1.5	150
GTF101-5-15-0250 Art. no. 607607		250
GTF101-5-15-0500 Art. no. 607608		500
GTF101-5-15-1000 Art. no. 607609		1000
GTF101-5-15-1500 Art. no. 607610		1500
GTF101-5-30-0150 Art. no. 607611	3.0	150
GTF101-5-30-0250 Art. no. 607612		250
GTF101-5-30-0500 Art. no. 607613		500
GTF101-5-30-1000 Art. no. 607614		1000
GTF101-5-30-1500 Art. no. 607615		1500
GTF101-5-60-0150 Art. no. 607616	6.0	150
GTF101-5-60-0250 Art. no. 607617		250
GTF101-5-60-0500 Art. no. 607618		500
GTF101-5-60-1000 Art. no. 607619		1000
GTF101-5-60-1500 Art. no. 607620		1500

Note: Handheld instrument probes can be found in chapter handheld instruments and the appropriate devices

INDUSTRY-TEMPERATURE PROBE



GTF 101 P

Temperature probe

General:

The GTF 101 is a temperature probe that can be fully tailored according to customers' requirements. The robust GTF 101 is especially suited for applications at high permanent temperatures and pressures in air, gases or liquids. The temperature is measured with resistance temperature sensors (Pt100 or Pt1000)

Specifications:

Probe diameter D: 3 mm, 4 mm, 5 mm, 6 mm, 8 mm, other diameters upon request

Cable sleeve: for probe diameters D 3 mm, 4 mm, 5 mm, 6 mm, 8 mm: there is a cable sleeve Ø 5 mm x 50 mm in addition to the fitting length.
for probe diameters D 6 mm and MB3 or MB4: there is a cable sleeve Ø 8 mm x 35 mm with taper to Ø 5 mm x 17 mm in addition to the fitting length
Note: The temperature of the cable sleeve must not exceed the permitted temperature of the cable.

Accuracy: DIN class B, DIN class A, DIN class AA (1/3 DIN class B), 1/10 DIN class B

Tube material: V4A stainless steel (1.4404)

GTF 101 P - 1 - 2 - 3 - 4 - 5 - 6 - 7 - 8

Greisinger		
1.	Sensor element	
	P	Pt100
	T	Pt1000
2.	Sensor element connection	
	2L	2-wire
	3L	3-wire
	4L	4-wire
3.	Accuracy	
	A	DIN cl. A (validity area: -30 ... +300 °C)
	B	DIN cl. B (Standard) (validity area: -50 ... +500 °C)
	D	DIN cl. AA (1/3 DIN cl. B) (validity area: 0 ... +150 °C)
	Z	1/10 DIN cl. B (validity area: -50 ... +100 °C)
4.	Measuring range MB	
	MB1	-50 ... +400 °C
	MB2	-200 ... +400 °C
	MB3	-70 ... +600 °C (jacket thermo element)
	MB4	-50 ... +850 °C (jacket thermo element)
5.	Probe diameter D	
	D30	3.0 mm
	D40	4.0 mm
	D50	5.0 mm
	D60	6.0 mm
	D80	8.0 mm
	Dxx	other diameter in mm
6.	Fitting length EL	
	0050	50 mm
	0100	100 mm
	0150	150 mm
	0250	250 mm
	0500	500 mm
	1000	1000 mm
	xxxx	any length in mm
7.	Cable length L	
	L01	1 m silicone cable (standard)
	Lxx	any length in m
8.	Type of cable	
	P	PVC cable up to max. 105 °C (surcharge per 1 m cable length L)
	S	silicone cable up to max. 200 °C (surcharge per 1 m cable length L)
	T	Teflon cable up to max. 250 °C (surcharge per 1 m cable length L)
	G	glass silk cable up to max. 400 °C (surcharge per 1 m cable length L)



GTF 101 P-OKH

Temperature probe

General:

The GTF 101 is a temperature probe that can be fully tailored according to customers' requirements. The robust GTF 101 is especially suited for applications at high permanent temperatures and pressures in air, gases or liquids. The temperature is measured with resistance temperature sensors (Pt100 or Pt1000)

Specifications:


Probe diameter D: 3 mm, 4 mm, 5 mm, 6 mm, 8 mm, other diameters upon request

Accuracy: DIN cl. B, DIN cl. A, DIN cl. AA (1/3 DIN cl. B), 1/10 DIN cl. B

Tube material: V4A stainless steel (1.4404 or 1.4571)

GTF 101 P-OKH - 1 - 2 - 3 - 4 - 5 - 6 - 7 - 8

Greisinger		
1.	Sensor element	
	P	Pt100
	T	Pt1000
2.	Sensor element connection	
	2L	2-wire
	3L	3-wire
	4L	4-wire
3.	Accuracy	
	A	DIN cl. A (validity area: -30 ... +300 °C)
	B	DIN cl. B (Standard) (validity area: -50 ... +500 °C)
	D	DIN cl. AA (1/3 DIN cl. B) (validity area: 0 ... +150 °C)
	Z	1/10 DIN cl. B (validity area: -50 ... +100 °C)
4.	Measuring range MB	
	MB1	-50 ... +200 °C
	MB2	-50 ... +250 °C (only with Teflon or glass silk cable)
	MB3	-50 ... +400 °C (only with glass silk cable)
	MB4	-200 ... +250 °C (only with Teflon cable)
	MB5	-20 ... +105 °C (only with PVC-cable)
5.	Probe diameter D	
	D30	3.0 mm (only with Teflon cable)
	D40	4.0 mm (only with Teflon cable)
	D50	5.0 mm
	D60	6.0 mm
	D80	8.0 mm
	Dxx	other diameter in mm
6.	Fitting length EL	
	0050	50 mm
	0100	100 mm
	0150	150 mm
	0250	250 mm
	0500	500 mm
	1000	1000 mm
	xxxx	any length in mm
7.	Cable length L	
	L01	1 m silicone cable (standard)
	Lxx	any length in m
8.	Type of cable	
	P	PVC cable up to max. 105 °C (surcharge per 1 m cable length L)
	S	silicone cable up to max. 200 °C (surcharge per 1 m cable length L)
	T	Teflon cable up to max. 250 °C (surcharge per 1 m cable length L)
	G	glass silk cable up to max. 400 °C (surcharge per 1 m cable length L)



Special lengths, special sheath materials, etc. upon request.

INDUSTRY-TEMPERATURE PROBE



GTF 101 K

Temperature probe

General:

The GTF 101 is a temperature probe that can be fully tailored according to customers' requirements. The robust GTF 101 is especially suited for applications at high permanent temperatures and pressures in air, gases or liquids. The temperature is measured with thermocouple wires (NiCr-Ni).

Specifications:

Sensor element: Type K (NiCr-Ni)
Measuring ranges: -200 ... +1150 °C

Recommended upper temperature limit for continuous use:

Ø	0.5	1.0	1.5
°C	700	700	920

Probe diameter D: 1.5 mm, 3 mm, 6 mm
 other diameters upon request

Cable sleeve: for probe diameters D 0.5 mm, 1 mm, 1.5 mm, 3 mm:
 there is a cable sleeve Ø 5 mm x 50 mm in addition to the fitting length

for probe diameters D 6 mm:
 there is a cable sleeve Ø 8 mm x 35 mm with taper to Ø 5 mm x 17 mm in addition to the fitting length

Note:
 The temperature of the cable sleeve must not exceed the permitted temperature of the cable.


Accuracy: class 1

Tube material: Inconel 600

GTF 101 K - 1 - 2 - 3 - 4

Greisinger		
1.	Probe diameter D	
	D15	1.5 mm
	D30	3.0 mm
	D60	6.0 mm
	Dxx	other diameter in mm
2.	Fitting length EL	
	0100	100 mm
	0150	150 mm
	0250	250 mm
	0500	500 mm
	1000	1000 mm
	xxxx	any EL in mm (e.g.: 0100 = 100 mm)
3.	Cable length L	
	L01	1 m silicone cable (standard)
	Lxx	any length in m (e.g.: L03 = 3 m)
4.	Type of cable	
	P	PVC cable up to max. 105 °C (surcharge per 1 m cable length L)
	S	silicone cable up to max. -50 ... +200 °C (standard) (surcharge per 1 m cable length L)
	T	Teflon cable up to max. -200 ... +250 °C (surcharge per 1 m cable length L)
	G	glass silk cable up to max. -50 ... +400 °C (surcharge per 1 m cable length L)

Standard types see standard jacket thermo element GTF 101-5-xx-xxxx.



GTF 101 K-OKH

Temperature probe

General:


The GTF 101 is a temperature probe that can be fully tailored according to customers' requirements. The robust GTF 101 is especially suited for applications at high permanent temperatures and pressures in air, gases or liquids. The temperature is measured with thermocouple wires (NiCr-Ni).

Specifications:

Sensor element: Type K (NiCr-Ni)
Probe diameter D: 3 mm, 5 mm, 6 mm, other diameters upon request
Accuracy: class 1
Tube material: V4A stainless steel (1.4404 or 1.4571)

GTF 101 K-OKH - 1 - 2 - 3 - 4 - 5

Greisinger		
1.	Probe diameter D	
	D30	3.0 mm only with teflon cable
	D50	5.0 mm
	D60	6.0 mm
	Dxx	other diameter in mm
2.	Fitting length EL	
	0050	50 mm
	0100	100 mm
	0150	150 mm
	0250	250 mm
	0500	500 mm
	1000	1000 mm
	xxxx	any EL in mm (e.g.: 0100 = 100 mm)
3.	Measuring range	
	MB1	-50 ... +200 °C
	MB2	-50 ... +250 °C only with teflon or glass silk cable
	MB3	-50 ... +400 °C only with glass silk cable
4.	Cable length L	
	L01	1 m silicone cable (standard)
	Lxx	any length in m (e.g.: L03 = 3 m)
5.	Type of cable	
	P	PVC cable up to max. 105 °C (surcharge per 1 m cable length L)
	S	silicone cable up to max. -50 ... +200 °C (standard) (surcharge per 1 m cable length L)
	T	Teflon cable up to max. -200 ... +250 °C (surcharge per 1 m cable length L)
	G	glass silk cable up to max. -50 ... +400 °C (surcharge per 1 m cable length L)



Special dimensions, special jacket materials, etc. available on request.

Note: Handheld instrument probes can be found in chapter handheld instruments and the appropriate devices

INDUSTRY-TEMPERATURE PROBE



- HIGHLIGHTS:
- Pt100, Pt1000, NiCr-Ni (type K)
 - complete with thread and cable (loose ends)
 - very robust

GTF 102

Temperature probe

General:

The GTF 102 is a temperature probe that can be fully tailored according to customers' requirements. The robust GTF 102 is especially suited for applications at high permanent temperatures and pressures in air, gases or liquids. The temperature is measured with either thermocouple (NiCr-Ni) or resistance temperature sensors (Pt100 / Pt1000). The probe is provided by default with tread, cable sleeve and 1 m silicone cable (compensation line with loose ends).

Specifications:

Sensor element:

Pt100 (2- / 3- or 4- wire), Pt1000 (2- / 3- or 4- wire) NiCr-Ni

Accuracy (standard):

Pt100 / Pt1000: DIN class B, NiCr-Ni: class 1

Tube material:


V4A (1.4404)

Thread material:

stainless steel

Connection cable:

standard: silicone compensation line, loose ends, length: 1 m (up to max. 200)

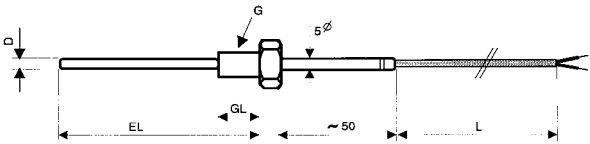


GTF 102 - 1 - 2 - 3 - 4 - 5 - 6 - 7 - 8


Greisinger		
1.	Sensor element	
	P2	Pt100 (2-wire)
	P3	Pt100 (3-wire)
	P4	Pt100 (4-wire)
	T2	Pt1000 (2-wire)
	T4	Pt1000 (4-wire)
	K	NiCr-Ni
2.	Accuracy	
	1	class 1 only for NiCr-Ni
	A	DIN class A only for Pt100 / Pt1000 (validity area: -30 ... +300 °C)
	B	DIN class B (standard) only for Pt100 / Pt1000 (validity area: -50 ... +500 °C)
	D	DIN class AA (1/3 DIN class B) only for Pt100 / Pt1000 (validity area: 0 ... +150 °C)
	Z	1/10 DIN class B only for Pt100 (validity area: -50 ... +100 °C)
3.	Measuring range	
	MB1	-50 ... +200 °C
	MB2	-50 ... +400 °C
	MB3	-50 ... +600 °C
	MB5	other measuring range
4.	Probe diameter D	
	15	1.5 mm only with sensor element NiCr-Ni (K)
	22	2.2 mm rigid
	30	3.0 mm (Standard)
	40	4.0 mm
	50	5.0 mm
	60	6.0 mm
	80	8.0 mm
5.	Fitting length EL	
	0100	100 mm (Standard)
	0150	150 mm
	0250	250 mm
	0500	500 mm
	1000	1000 mm
	xxxx	any length in mm (e.g. 0700 = 700 mm)
6.	Thread	
	G1	G ½ (Standard)
	G2	G ¼
	G5	G 3/8
	M5	M5 max. D = 3.0 mm
	M6	M6 max. D = 3.0 mm
	M8	M8 max. D = 5.0 mm
	M0	M10 max. D = 6.0 mm
	xxx	other thread
7.	Cable length L	
	L01	1 m silicone cable (standard)
	Lxx	any length in m (e.g.: L03 = 3 m)
8.	Type of cable	
	P	PVC cable up to max. -20 ... +105 °C (surcharge per 1 m cable length L)
	S	silicone cable up to max. -50 ... +200 °C (standard) (surcharge per 1 m cable length L)
	T	Teflon cable up to max. -200 ... +250 °C (surcharge per 1 m cable length L)
	G	glass silk cable up to max. -50 ... +400 °C (surcharge per 1 m cable length L)

Special lengths, special sheath materials, etc. upon request.

INDUSTRY-TEMPERATURE PROBE

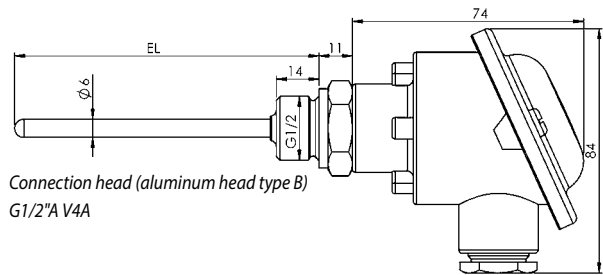

Connection head (aluminum head type B)
G1/2\"A V4A

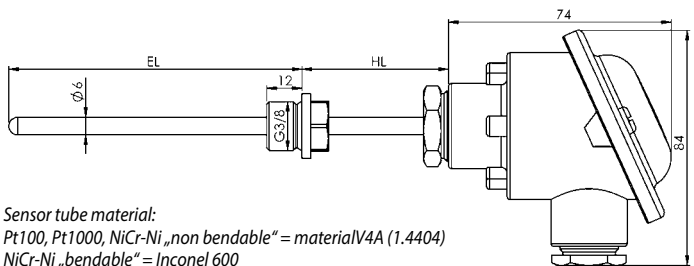

Sensor tube material:
Pt100, Pt1000, NiCr-Ni „non bendable“ = material V4A (1.4404)
NiCr-Ni „bendable“ = Inconel 600

GTF 103

Temperature probe

GTF 103 - 1 - 2 - 3 - 4 - 5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13

Greisinger		
1.	Normal signal	
	O	without output signal
	G	with output signal 4-20 mA, 2-wire, RT420 (Pt100 only)
	G	with output signal 4-20 mA, 2-wire, GITT 01 (Pt1000 or NiCr-Ni)
	GV	with output signal 0 ... 10 V, 3-wire, T03 BU (Pt100 only)
		Technical specifications Transmitter T03 BU, RT 420, GITT01, see chapter Transmitters
2.	Sensor element	
	P	Pt100
	T	Pt1000
	K	NiCr-Ni Type K
3.	Accuracy class	
	B	DIN class B (Pt100 or Pt1000) (validity area: -50 ... +500 °C)
	A	DIN class A (Pt100 or Pt1000) (validity area: -30 ... +300 °C)
	D	DIN class AA (1/3 DIN class B) (Pt100 or Pt1000) (validity area: 0 ... +150 °C)
	Z	1/10 DIN class B (only Pt100) (validity area: -50 ... +100 °C)
	1	Class 1 NiCr-Ni Type K
4.	Sensor element connection	
	2L	2-wire
	3L	3-wire
	4L	4-wire
5.	Connection head	
	A	sensor head made of aluminum (DIN B head)
	E	sensor head made of stainless steel
	K	sensor head made of plastic
	S	small sensor head (design type DE)
6.	Measuring insert	
	0	without process connection
	MA	with process connection (standard for transmitter)
7.	Process connection	
	N	without process connection
	J	with process connection

8.	Neck tube	
	K	no neck tube
	M	with neck tube
9.	Size of process connection	
	G1	G 1/2
	G2	G 1/4
	G5	G 3/8
	M14	M14x1.5
	xxx	other thread
10.	Length of neck tube	
	000	no neck tube
	050	50 mm
	100	100 mm
	xxx	other neck tube length
11.	Probe diameter	
	30	3 mm
	40	4 mm
	60	6 mm
	80	8 mm
	xxx	other diameter
12.	Fitting length	
	0050	50 mm
	0100	100 mm
	0150	150 mm
	0250	250 mm
	0500	500 mm
	xxxx	any length in mm (e.g. 0600 = 600 mm)
13.	Measuring range	
	MB1	-50 ... +200 °C
	MB2	-50 ... +400 °C
	MB3	-50 ... +600 °C
	MB5	other measuring range (Specification required with standard signal)

Special designs can be ordered only in written form (fax/letter/email) and are excluded from exchange!

Note: Handheld instrument probes can be found in chapter handheld instruments and the appropriate devices

INDUSTRY-TEMPERATURE PROBE



GTF 111


Temperature probe

General:	
The GTF 111 is a temperature sensor without thread with a practical M12 connector. The measurement is carried out by means of resistance temperature sensors Pt100 or Pt1000.	
Specifications:	
Sensor element:	Pt100 or Pt1000 (4-wire)
Temperature range:	-50 ... +250 °C (probe tip)
Accuracy:	Class B, Class A, Class AA, Class 1/10 DIN B
Response time:	FS Ø 3 mm: T ₉₀ ≤ 1.5 s FS Ø 6 mm: T ₉₀ ≤ 7.4 s
Process pressure:	max. 50 bar
Electrical connection:	M12 connector, 4-pole
Thermowell and tip:	1.4404 (V4A)
Protection:	IP67 / IP69K
Ambient temperature:	-20 ... +85 °C

GTF 111 - 1 - 2 - 3 - 4 - 5 - 6

GREISINGER	
1. Sensorelement	
P	Pt100
T	Pt1000
2. Accuracy	
B	class B (Standard) (validity area: -50 ... +500 °C)
A	class A (validity area: -30 ... +300 °C)
D	class AA (1/3 class B) (validity area: 0 ... +150 °C)
Z	1/10 DIN class B only for Pt100 (validity area: -50 ... +100 °C)
3. Measuring range	
MB1	-50 ... +250°C (M12 does not exceed 85 °C)
MBS	other measuring ranges
4. Installation length EL	
0050	50 mm
0100	100 mm
0150	150 mm
0250	250 mm
xxxx	any installation length in mm
5. Probe diameter D	
D60	Ø 6 mm, without taper
D30	Ø 6 mm, with tapered probe tip Ø 3 mm L = 30 mm
Dxx	other diameters in mm
6. Option	
00	without option

M12 connecting cable see page 188

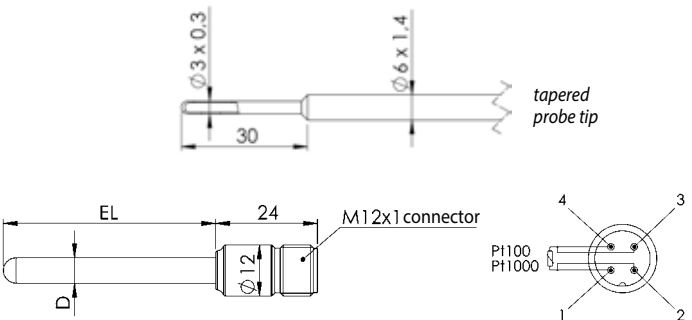

Special lengths, special sheath materials, etc. upon request.




GTF 112

Temperature probe

General:	
The GTF 112 is a temperature sensor with threaded process with a practical M12 connector. The measurement is performed by means of resistance temperature sensors Pt100 or Pt1000.	
Specifications:	
Sensor element:	Pt100 or Pt1000 (4-wire)
Temperature range:	-50 ... +250 °C (Fühlerspitze)
Accuracy:	Class B, class A, class AA, class 1/10 DIN B
Response time:	FS Ø 3 mm: T ₉₀ ≤ 1.5 s FS Ø 6 mm: T ₉₀ ≤ 7.4 s
Process pressure:	max. 50 bar
Electrical connection:	M12 connector, 4-pole
Thermowell and tip:	1.4404 (V4A)
Protection:	IP67 / IP69K
Ambient temperature:	-20 ... +85 °C

GTF 112 - 1 - 2 - 3 - 4 - 5 - 6 - 7 - 8

Greisinger	
1. Sensor element	
P	Pt100
T	Pt1000
2. Accuracy	
B	class B (validity area: -50 ... +500 °C)
A	class A (validity area: -30 ... +300 °C)
D	class AA (1/3 class B) (validity area: 0 ... +150 °C)
Z	1/10 DIN class B only for Pt100 (validity area: -50 ... +100 °C)
3. Measuring range	
MB0	-50 ... +100°C
MB1	-50 ... +250°C (with neck tube HL = 50 mm)
MBS	other measuring ranges
4. Installation length EL	
0050	50 mm
0100	100 mm
0150	150 mm
0250	250 mm
xxxx	any installation length in mm
5. Probe diameter D	
D60	Ø 6 mm, without taper
D30	Ø 6 mm, with tapered probe tip Ø 3 mm L = 30 mm
Dxx	other diameters in mm
6. Thread	
G1	G ½ (Standard)
G2	G ¼
xxx	other threads
7. Neck tube	
000	No neck tube (only up to 100 °C, only with MB0)
050	50 mm
8. Option	
00	without option

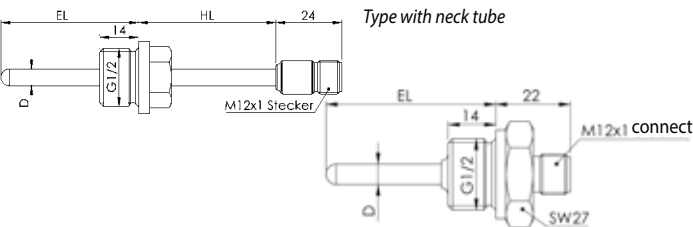

INDUSTRIAL PROBES FOR FOOD-, BEVERAGE- AND PHARMA INDUSTRY



GTL ...

Probes according to customer specification

Specifications:	
Measuring ranges:	-40 ... +200 °C (depending on probe construction)
Sensor:	Pt 100
Process connection:	M12 / G1/2" / without thread
Probe head:	probe head Ø 59 mm probe head Ø 18 mm Long (with transmitter) probe head Ø 18 mm Short (without transmitter)
Material:	sensor head: V2A, protection tube and peak: V4A
Probe length:	50, 100, 150, 250 or according to customer specification (in mm)
Diameter:	Ø 6 mm without contraction Ø 4 mm without contraction Ø 6 mm with offset probe peak Ø 3 mm
Response Time:	Ø 6 mm: $T_{90} \leq 7.4$ s Ø 4 mm: $T_{90} \leq 3.6$ s Ø 3 mm: $T_{90} \leq 1.5$ s
Protection rating:	IP69K / IP67
Option:	
- Neck tube - Electr. connection: fixed cable (PG) or M12-plug - Transmitter - Higher accuracy (DIN cl. AA or 1/10 DIN cl. B) - Display of temperature	

In case of interest, please ask for the GHM industrial probes brochure

TYPE N (NICRSI-NISI) - MEASURING PROBE (CLASS 1)



GTF101-N03250

Art. no. 602770

-50 ... +1300 °C, (short-term up to 1330 °C), FL=250 mm

GTF101-N03500

Art. no. 602771

as above, but FL = 500 mm

GTF101-N031000

Art. no. 602772

as above, but FL = 1000 mm

General:

Measuring probe Ø 3 mm

Mantle material: nickel-chromium-based stainless steel with extraordinary resistivity against oxidation at high temperatures and excellent corrosion resistance in chlorine and ammoniacal environments. A protective layer emerges at temperatures of approx. 980 °C and provides improved accuracy compared to other mantle materials.

The temperature can be applied to high temperatures for a longer period without noteworthy drift. The K-effect (near-order effect) is much smaller for type N thermocouples than for type K thermocouples.

Application:

Temperature measurement of exhaust fumes

Specifications:

Response time T_{90} : approx. 5 s

Probe tube: nickel-chromium-based stainless steel Ø 3 mm

Cable: 1 m silicone cable, loose ends



GTF101-N06250

Art. no. 602769

-50 ... +1300 °C, (short-term up to 1330 °C), FL = 250 mm;
more robust design with thicker protective cover

GTF101-N06500

Art. no. 607634

as above, but FL = 500 mm

GTF101-N061000

Art. no. 607635

as above, but FL = 1000 mm

General:

Measuring probe Ø 6 mm



Probe for permanently high temperatures, other data as probe Ø 3 mm

Specifications:

Response time T_{90} : approx. 10 s

Probe tube: nickel-chromium-based stainless steel Ø 6 mm

Cable: 1 m silicone cable, loose ends



Note: Handheld instrument probes can be found in chapter handheld instruments and the appropriate devices

INDUSTRIAL TEMPERATURE PROBES

**GTF 200 Pt100**

Art. no. 600017

-50 ... +200 °C, Pt100, 4-wire

Specifications:

Sensor:	Pt100, DIN cl. B (± 0.3 °C at 0 °C)
Sensor sleeve:	made of stainless steel (1.4571), length 50 mm, diameter 5 mm
Cable:	silicone (4 x 0.14 ²), approx. 1 m suitable for 2-/ 3- or 4-wire probe

GTF 200 Pt100 WD

Art. no. 600020

-20 ... +105 °C, Pt100, 4-wire, tube enclosed water proof

Specifications:

Sensor:	Pt100, DIN cl. B (± 0.3 °C at 0 °C)
Sensor sleeve:	made of stainless steel
Cable:	PVC (4 x 0.14 ²), approx. 1 m suitable for 2-/ 3- or 4-wire probe

**GRO 200 Pt100**

Art. no. 600012

Temperature probes

GRO 200 Pt1000

Art. no. 600013

Temperature probes, -50 ... +200 °C, DIN class B, 4-wire

GRO 200 K

Art. no. 600011


Temperature probes, -50 ... +20 °C, NiCr-Ni (Type K)

Specifications:

Sensor body:	made of aluminium
Probe:	can be mounted with cable clamp or similar constructions to pipes (any diameter)
Cable:	silicone, approx. 2 m

For faster heat exchange we suggest our
heat-conductive paste GWL10G

Art. no. 603267

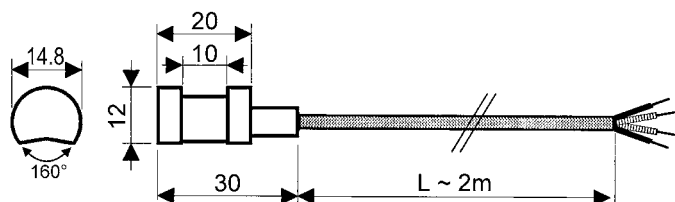

INDUSTRIAL TEMPERATURE PROBES (ATEX 100)

without neck tube, for temperatures ≤ 100 °Cwith neck tube, for temperatures > 100 °C

FOR ALL POTENTIALLY EXPLOSIVE
ATMOSPHERES OF THE EQUIPMENT-GROUP II
WITH THE PROTECTION (I) OR (E)

GTF 101-EX

-200 °C ... +100 °C (without neck tube)

-200 °C ... +900 °C (with neck tube)

General:

Readily assembled voltage free temperature probe of stainless steel with connection cable. The sensor inset is not exchangeable. Mounting is done via separate clamping ring fittings GKV.

Options:**Sensors:****Pt100 / Pt1000; mineral insulated element, 4-wire:**

Measuring ranges: -200 °C ... +100 °C (600 °C - with neck tube), DIN class B

Type K; mineral insulated thermocouple:

Measuring ranges: -200 °C ... +100 °C (900 °C - with neck tube), class 1

Probe length:

up to 100mm (without upcharge)

upcharge per further starting 100 mm

Neck tube length:

without (without upcharge)

upcharge per further starting 100 mm

Probe diameter:

3 mm, 4 mm, 5 mm, 6 mm or 8 mm (without upcharge)

Cable:

silicone cable, standard length 1 m

upcharge per further starting m cable

PVC, teflon (Pt100 / Pt1000 only) upon request

Ambient temperature:

-20 ... +60 °C (protection type „e“ and protection type „i“ zone 0, 20) or -20 ... +80 °C (+60 °C) (protection type „i“ zone 1, 2, 21, 22)

Type of protection:

„i“: intrinsic safety (without upcharge)

„e“: increased safety

Potentially explosive atmospheres:

suitable for zone 0, zone 1, zone 2, zone 20, zone 21, zone 22


Clamping ring screw connection:

M8x1, M10x1, G1/4" and G1/2" for diameter 3 mm, 6 mm or 8 mm.

Please refer to page 219

To determine exact order name ask for our type list.


Download via homepage possible (Products -> Ex-Protection -> Temperature probes).

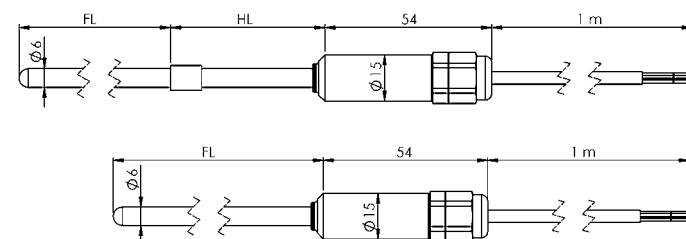

Note: Not all execution options are
possible in all zones!



INDUSTRIAL TEMPERATURE PROBES (ATEX 100)

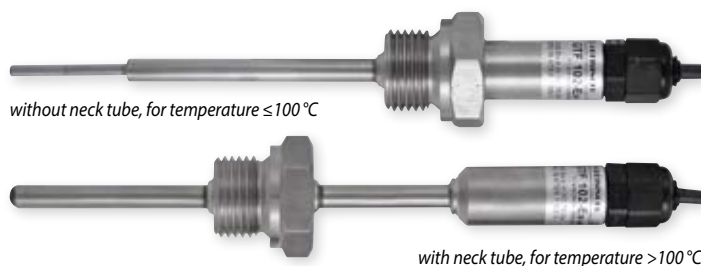without neck tube, for temperature $\leq 100^\circ\text{C}$ with neck tube, for temperature $> 100^\circ\text{C}$

FOR ALL POTENTIALLY EXPLOSIVE
ATMOSPHERES OF THE EQUIPMENT-GROUP II
WITH THE PROTECTION (I) OR (E)

GTF 102-EX

-200°C ... +100°C (without neck tube)
-200°C ... +900°C (with neck tube)

General:

Readily assembled voltage free temperature probe of stainless steel with connection cable. The sensor inset is not exchangeable. Thread is welded or brazed to the probe.

Options:**Sensors:**

Pt100 / Pt1000, mineral insulated element, 4-wire:

Measuring ranges: -200°C ... +100°C (600°C - with neck tube), DIN cl. B

Type K; mineral insulated thermocouple:

Measuring ranges: -200°C ... +100°C (900°C - with neck tube), class 1

Probe length:

up to 100mm (without upcharge)

upcharge per further starting 100 mm

Neck tube length:

without (without upcharge)

upcharge per starting 100 mm

Probe diameter:

3 mm, 4 mm, 5 mm, 6 mm or 8 mm (without upcharge)

Thread:

G1/2", G3/8" (Standard) (without upcharge)

G1/8", G1/4", G3/4", M8x1, M10x1

Cable:

silicone cable, standard length 1 m

upcharge per further starting m cable

PVC, teflon (Pt100 / Pt1000 only) upon request

Ambient temperature:

-20 ... +60 °C (protection type „e“ and protection type „i“ zone 0, 20) or -20 ... +80 °C (+60 °C) (protection type „i“ zone 0/1, 1, 2, 20/21, 21, 22)

Type of protection:

„i“: intrinsic safety (without upcharge)


„e“: increased safety

Potentially explosive atmospheres:


suitable for zone 0, zone 0/1, zone 1, zone 2, zone 20, zone 20/21, 21, zone 22

To determine exact order name ask for our type list.

Download via homepage possible (Products -> Ex-Protection -> Temperature probes).

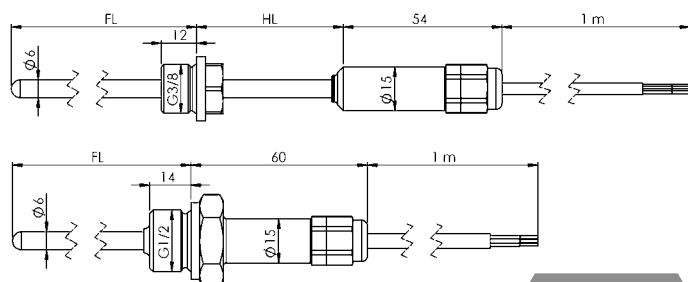

Note: Not all execution options are possible in all zones!

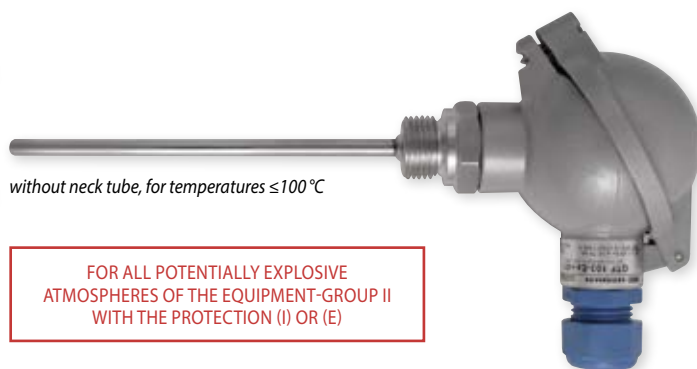without neck tube, for temperatures $\leq 100^\circ\text{C}$

FOR ALL POTENTIALLY EXPLOSIVE
ATMOSPHERES OF THE EQUIPMENT-GROUP II
WITH THE PROTECTION (I) OR (E)

GTF 103-EX

-200°C ... +100°C (without neck tube)
-200°C ... +900°C (with neck tube)

General:

Readily assembled voltage free temperature probe of stainless steel connection head and clamping block. The sensor inset is exchangeable. Thread is welded or brazed to the probe. Mounting is done via clamping ring fitting or thread welded / brazed to the probe tube. The connection head is also suitable to carry a head transmitter.

Options:**Sensors:**

Pt100 / Pt1000; mineral insulated element, 4-wire:

Measuring ranges: -200°C ... +100°C (600°C - with neck tube), DIN cl. B

Type K; mineral insulated thermocouple (without upcharge):

Measuring ranges: -200°C ... +100°C (900°C - with neck tube), class 1

Probe length:

up to 100 mm (without upcharge)

upcharge per further starting 100 mm

Neck tube length Ø 3 mm, 4 mm, 5 mm:

without (without upcharge)

upcharge per starting 100 mm

Probe diameter:

3 mm (the sensor inset is not exchangeable) (without upcharge)

4 mm, 5 mm, 6 mm or 8 mm (the sensor inset exchangeable)

Thread:

G1/2", G3/8" (Standard) or without thread (without upcharge)

G1/8", G1/4", G3/4", M8x1, M10x1

Ambient temperature:

Intrinsically safe version without output signal

zone 0, 20: -20 °C ... +60 °C; zone 0/1, 1, 2, 20/21, 21, 22: -20 °C ... +80 °C (+60 °C)

Intrinsically safe version with output signal 4 ... 20 mA

zone 0, 20: -20 °C ... +40 °C; zone 0/1, 1, 2, 20/21, 21, 22: -20 °C ... +50 °C (+40 °C)

Version with elevated safety: zone 1, 2, 21, 22: -20 °C ... +60 °C

Type of protection:

„i“: intrinsic safety (without upcharge)

„e“: increased safety

Potentially explosive atmospheres:

suitable for zone 0, zone 0/1, zone 1, zone 2, zone 20, zone 20/21, zone 21, zone 22

Transmitter GITT 01-Ex

(please refer to page 172), output signal 4 ... 20 mA, measuring range on customers demands, protection type „i“ intrinsic safety.


Clamping ring screw connection:

M8x1, M10x1, G1/4" and G1/2" for diameter 3 mm, 6 mm or 8 mm.

Please refer to page 219

To determine exact order name ask for our type list.

Download via homepage possible (Products -> Ex-Protection -> Temperature probes).



Note: Not all execution options are possible in all zones!



Note: Handheld instrument probes can be found in chapter handheld instruments and the appropriate devices

INDUSTRIAL TEMPERATURE PROBES (ATEX 100)



FOR ALL POTENTIALLY EXPLOSIVE
ATMOSPHERES OF THE EQUIPMENT-GROUP II
WITH THE PROTECTION (I) OR (E)

GTF 111-EX

-200°C ... +100°C (without neck tube)
-200°C ... +600°C (with neck tube)

General:
The GTF 111-Ex temperature probe is designed for use in explosion-prone areas. The probe is very small, which makes it suitable for use in places that are difficult to access. The probe is equipped with an M12 connection.
The probe inserts of the GTF 111-Ex are potted and cannot be replaced. They are available in the following sensor element group: Resistance thermometer: Pt 100 or Pt 1000. Only jacket resistance thermometers are used as sensor elements. The materials used for the probe parts that come into contact with the medium consist of stainless steel (e.g. 1.4404, 1.4435 or 1.4571). This guarantees high resistance to a wide variety of chemical compounds.

Upcharges:
Sensors:
Pt100 / Pt1000, mineral insulated element, 4-wire:
Measuring ranges: -200 °C ... +100 °C (600 °C - with neck tube), DIN cl. B

Probe length:
up to 100 mm (without upcharge)
upcharge per further starting 100 mm

Neck tube length:
without (without upcharge)
upcharge per starting 100 mm

Probe diameter:
3 mm, 4 mm, 5 mm, 6 mm oder 8 mm (without upcharge)


Connection:
M12 plug connector

Ambient temperature:
-20 ... +60 °C (protection type „e“ and protection type „i“ zone 0, 20) or -20 ... +80 °C (+60 °C) (protection type „i“ zone 1, 2, 21, 22)

Type of protection:
„i“: intrinsic safety (without upcharge)
„e“: increased safety

Potentially explosive atmospheres:
suitable for zone 0, zone 1, zone 2, zone 20, 21, zone 22

To determine exact order name ask for our type list.
Download via homepage possible (Products ->Ex-Protection ->Temperature probes).

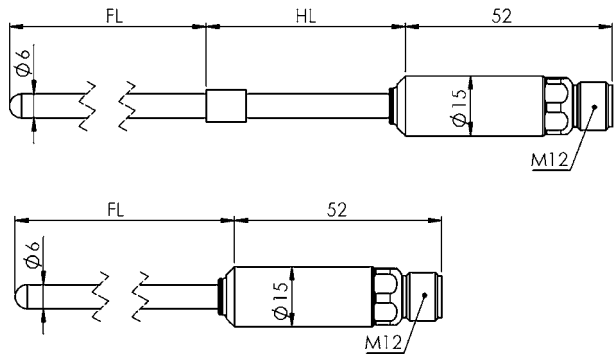

Note: Not all execution options are possible in all zones!



FOR ALL POTENTIALLY EXPLOSIVE
ATMOSPHERES OF THE EQUIPMENT-GROUP II
WITH THE PROTECTION (I) OR (E)

GTF 112-EX

-200°C ... +100°C (without neck tube)
-200°C ... +600°C (with neck tube)

General:
The GTF 112-Ex temperature probe is designed for use in explosion-prone areas. The probe is very small, which makes it suitable for use in places that are difficult to access. The probe is equipped with an M12 connection.
The probe inserts of the GTF 112-Ex are potted and cannot be replaced. They are available in the following sensor element group: Resistance thermometer: Pt 100 or Pt 1000. Only jacket resistance thermometers are used as sensor elements. The materials used for the probe parts that come into contact with the medium consist of stainless steel (e.g. 1.4404, 1.4435 or 1.4571). This guarantees high resistance to a wide variety of chemical compounds.

Upcharges:
Sensors:
Pt100 / Pt1000, mineral insulated element, 4-wire:
Measuring ranges: -200 °C ... +100 °C (600 °C - with neck tube), DIN cl. B

Probe length:
up to 100 mm (without upcharge)
upcharge per further starting 100 mm

Neck tube length:
without (without upcharge)
upcharge per starting 100 mm

Probe diameter:
3 mm, 4 mm, 5 mm, 6 mm oder 8 mm (without upcharge)

Thread:
G1/2", G3/8" (Standard) (without upcharge)
G1/8", G1/4", G3/4", M8x1, M10x1


Connection:
M12 plug connector

Ambient temperature:
-20 ... +60 °C (protection type „e“ and protection type „i“ zone 0, 20) or -20 ... +80 °C (+60 °C) (protection type „i“ zone 1, 2, 21, 22)

Type of protection:
„i“: intrinsic safety (without upcharge)
„e“: increased safety

Potentially explosive atmospheres:
suitable for zone 0, zone 0/1, zone 1, zone 2, zone 20, zone 20/21, 21, zone 22

To determine exact order name ask for our type list.
Download via homepage possible (Products ->Ex-Protection ->Temperature probes).

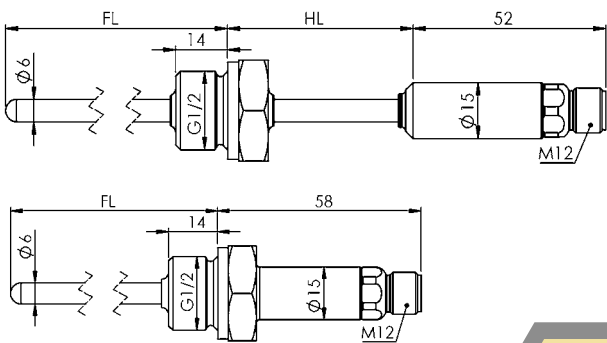

Note: Not all execution options are possible in all zones!

STERILIZABLE, HERMETICALLY SEALED WATER PROOF TEMPERATURE PROBES



HIGHLIGHTS:

- sealed against moisture and corrosion
- easily cleaned and sterilised
- small size provides a fast response
- also available in custom lengths
- optionally with mechanical protection (V4A-sleeve) and with thread or clamping ring screw connection available.

TF 101 P-L01

Art. no. 601687

Design type Pt100, cable length 1 m

TF 101 P-L02

Art. no. 601689

Design type Pt100, cable length 2 m

TF 101 P-L03

Art. no. 601691

Design type Pt100, cable length 3 m

Specifications:

Probe:	flexible sealed PFA Pt100 sensor
Connection:	4-wire-connection (4 x 0.14 mm ² , nickel-plated copper)
Nominal diameter:	2.1 mm
Accuracy:	according to DIN class A
Measuring ranges:	-60 ... +250 °C
Response time:	water 0.4 m/s approx. 8 s IP68 seal-welded tip also available with Pt1000

Variants:**TF 101 P-L01-V4A**



Art. no. 605092

robust design type with robust V4A protective tube Ø 3 mm, FL = 50 mm
*not possible at type K!***TF 101 P-L02-V4A**

Art. no. 602761

robust design type with robust V4A protective tube Ø 3 mm, FL = 50 mm
*not possible at type K!***TF 101 P-L03-V4A**

Art. no. 604563

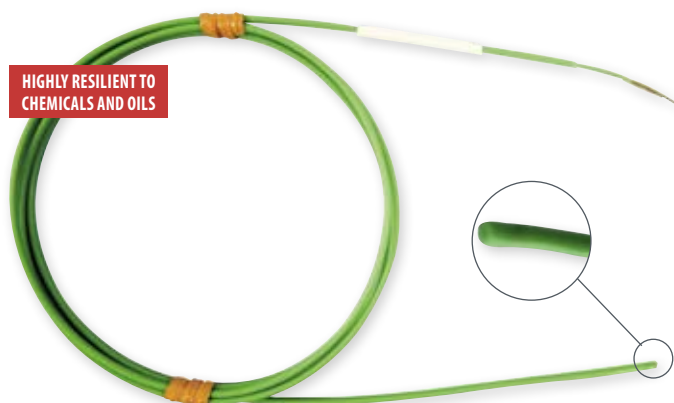robust design type with robust V4A protective tube Ø 3 mm, FL = 50 mm
not possible at type K!

HIGHLIGHTS:

- sealed against moisture and corrosion
- easily cleaned and sterilised
- small size provides a fast response
- also available in custom lengths

FOR USE IN AGGRESSIVE ENVIRONMENTS AND TIGHT PLACES

TF 101 K-L01

Art. no. 601820

Design type K (NiCr-Ni), cable length 1 m

TF 101 K-L02

Art. no. 601798

Design type K (NiCr-Ni), cable length 2 m

TF 101 K-L03


Art. no. 601797

Design type K (NiCr-Ni), cable length 3 m

Specifications:

Probe:	These PFA insulated thermocouple wire sensors are hermetically seal-welded at the sensor tip to provide continuous PFA protection over the measurement junction. stranded NiCr-Ni-thermocouple wire (0.14 mm ²)
Nominal cross section:	1.6 mm x 2.5 mm
Measuring ranges:	-270 ... +250 °C
Response time:	water 0.4 m/s approx. 8 s IP68 seal-welded tip electrically-insulated junction also available with thermocouples type J, T and E

SELF-ADHESIVE TEMPERATURE PROBES

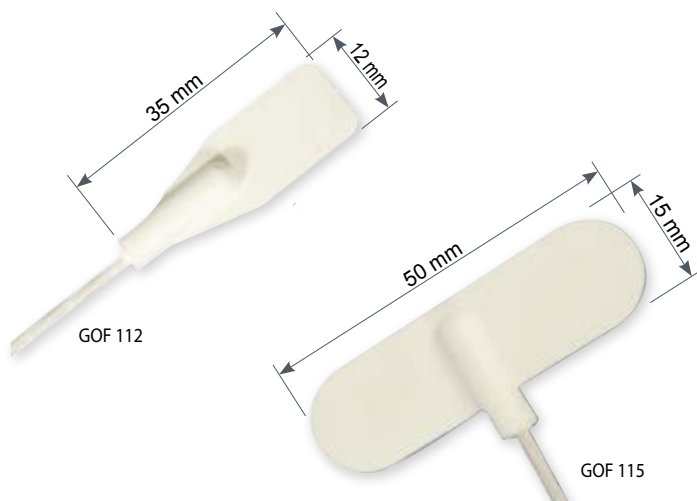

HIGHLIGHTS:

- sensor have adhesive back for easy mounting
- ultra-slim silicone rubber for maximum flexibility
- resistant to a variety of chemicals and oils
- PFA-insulated connection cable, 2 m long (other length up on request)
- 2 designs for flat (GOF 112) or curved (GOF 115) surfaces available

WITH MOULDED SILICONE DESIGN
FOR SURFACE MEASUREMENT ON
CURVED AND FLAT SURFACES

GOF 112-PT

Art. no. 603028

Pt100, adhesive back 35 x 12 mm, cable length 2 m, white

GOF 115-PT

Art. no. 603203

Pt100, adhesive back 15 x 50 mm, cable length 2 m, white

General:

- precision Pt100-probe, DIN class A, 4-wire connection
- temperature range: -50 ... +200 °C
- also available with Pt1000

GOF 112-K

Art. no. 604696

Design type K (NiCr-Ni), adhesive back 35 x 12 mm, cable length 2 m, green

GOF 115-K


Art. no. 603458

Design type K (NiCr-Ni), adhesive back 15 x 50 mm, cable length 2 m, green

General:

- The integral thermocouple sensor is bonded onto the inner surface of the self adhesive aluminum foil strip, which is provided for fast response time
- stranded NiCr-Ni-thermocouple wire (0.14 mm²)
 - temperature range: -50 ... +200 °C
 - also available with thermocouples type J, T and E

„CEMENT-ON“ THERMOCOUPLES

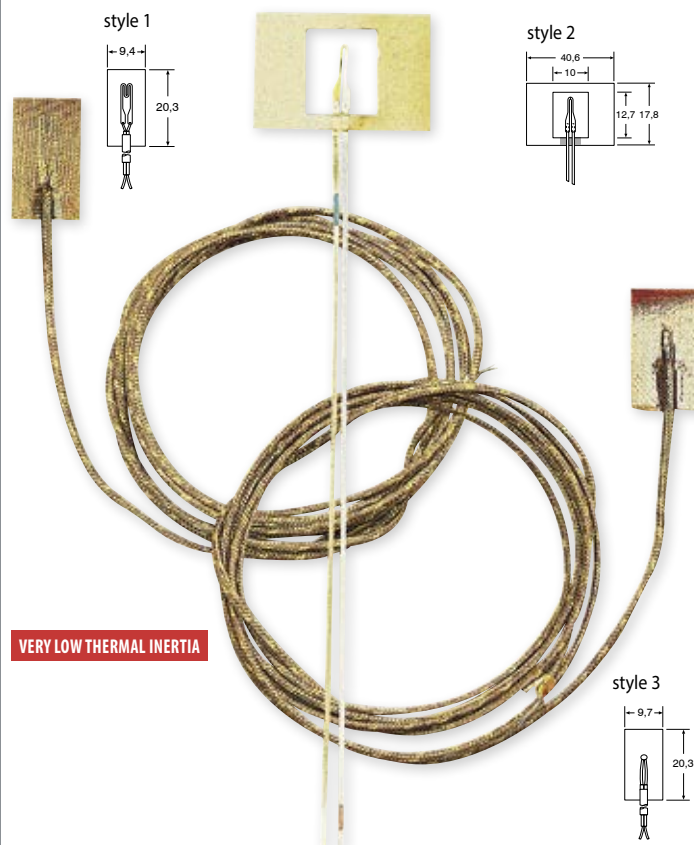

VERY LOW THERMAL INERTIA

HIGHLIGHTS:

- ultra fast response time: (style 1: t_{90} = approx. 20 ms, style 2: approx. 5 ms, style 3: approx. 300 ms)
- also available with thermocouples type J (only design 3), T and E
- style 1 and 3 optionally available with other lengths

GOF 120-K1

Art. no. 604184

Design type K (NiCr-Ni), cable length 90 cm, max. 260 °C (short-time: 370 °C)

GOF 120-K2

Art. no. 604334

Design type K (NiCr-Ni), cable length 15 cm, max. 540 °C (short-time: 650 °C)

GOF 120-K3

Art. no. 603249

Design type K (NiCr-Ni), cable length 90 cm, max. 260 °C (short-time: 370 °C)

General:

The series GOF 120 are a model line of Cement-On, fast response thermocouples for fast surface temperature measurement. The model line have 3 different styles. (Please order the high temperature cement separately)

The **design styles 1 and 2** are made from 0.01 mm thermocouple alloy foil by a special process where the butt welded thermocouple junction is 0.25 mm in thickness. The thermocouples are fabricated from class 1!

These styles are flat, extremely low inertia construction and are ideal means of measuring the temperature of both flat and curved metals, plastic and ceramic surfaces where very fast response is desired.

The **design style 3** is an economy version constructed from 0.25 mm diameter bead welded standard limit of error thermocouple wire. It should be used where extremely fast response time is not essential.

Accessories and spare parts:

OB-700

Art. no. 602883

High temperature chemical set cement, 236 ml (max. 871 °C)


Note:

cannot be used with high temperature cement (will break down insulation)

ACCESSORIES

CLAMPING RING SCREW CONNECTION
GKV... STAINLESS STEEL

(for all probes without thread)

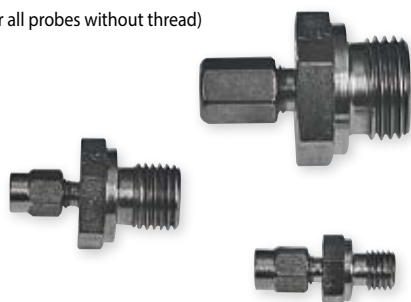

Type:	Outside thread	Clamp. ring-Ø (sensor tube-Ø)	Clamping ring
GKV1 602888	M8 x 1	1.5 mm	Teflon
GKV2 602889			Stainless steel
GKV3 602890		3.0 mm	Teflon
GKV4 602891			Stainless steel
GKV5 602892	G1/4"	1.5 mm	Teflon
GKV6 602893			Stainless steel
GKV7 602894		3.0 mm	Teflon
GKV8 602895			Stainless steel
GKV11 602898	G1/2"	6.0 mm	Teflon
GKV12 602899			Stainless steel
GKV9 602896	G1/2"	6.0 mm	Teflon
GKV10 602897			Stainless steel
GKV13 602900		8.0 mm	Teflon
GKV14 602901			Stainless steel
GKV15 602902	G1/2"	14.0 mm	Teflon
GKV16 602903	M10x1	6.0 mm	Stainless steel
GKV-R12 611175	R1/2	3.0 mm	Stainless steel

FLAT-PIN CONNECTIONS, FREE FROM THERMAL E.M.F.

(for type K, N, S)



NST 1200
NST 1300
NST 1700

NST 1200-K

Art. no. 602566

Flat-pin connections, free from thermal e.m.f., type K

NST 1300-N

Art. no. 605762

Flat-pin connections, free from thermal e.m.f., type N

NST 1700-S

Art. no. 603890

Flat-pin connections, free from thermal e.m.f., type S



NKU 1200-K-O

NKU 1200-K-O

Art. no. 602738

U-coupling for installation in front panels (max. 120°C)

NKU 1200
NKU 1700**NKU 1200-K**

Art. no. 602737

Flat-pin connections, free from thermal e.m.f., type K

NKU 1700-S


Art. no. 603535

Flat-pin connections, free from thermal e.m.f., type S

For higher temperatures use ceramic plug and coupling.

IMMERSION SLEEVE OF STAINLESS STEEL

Immersion sleeve for probes without thread

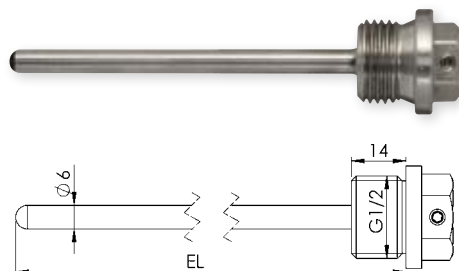**EST01**


Art. no. 602868

Basic price for 100 mm

General:

Thread: G1/2 (external thread)
Outer diameter immersion sleeve: Ø 6 mm
(for probes with outer diameter Ø 5 mm)
length: L = 100 mm (suitable for e.g. GTF101 with FL = 105 mm, Ø 5 mm)
Special lengths, diameters or threads upon request

Immersion sleeve for all probes with a G1/2"-thread

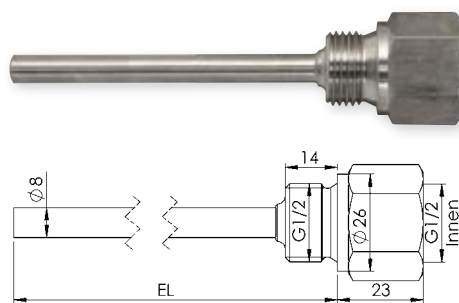**EST02**

Art. no. 603362

for 85 mm

General:

Thread: G1/2 (internal/external)
Outer diameter immersion sleeve: Ø 8 mm
(for probes with outer diameter Ø 6 mm)
L = 85 mm (suitable for e.g. GTF 103 with FL = 100 mm, Ø 6 mm)
L = 100 mm (suitable for e.g. GTF 103 with FL = 115 mm, Ø 6 mm)
Special lengths, diameters or threads upon request

GWL10G

Art. no. 603267

heat-conductive paste 10 g, in plastic gun, for faster heat exchange

ACCESSORIES

CABLES AND LINES

Silicone cable (-50 ... +200 °C) with teflon screened wires

S2P

silicone cable, 2-pole (2 x 0.25 mm²), highly flexible, external diameter approx. 3.8 mm, price per meter

S4P

silicone cable, 4-pole, 4 x 0.14 mm² cross section (insulation 2 x blue, 2 x white) (can also used as 3-wire), external diameter approx. 4 mm, price per meter

Glass silk insulated cable (-50 ... +400 °C) with stainless steel braiding

G4P

glass silk insulated cable, 4-pole (4 x 0.22 mm²), external diameter approx. 4 mm, price per meter

Teflon insulated cable (-200 ... +250 °C) with individual teflon insulated wires

T2P

teflon insulated cable, 2-pole (2 x 0.14 mm²), with additional cable screen, external diameter approx. 2.3 mm, price per meter

T4P

teflon insulated cable, 4-pole (4 x 0.14 mm²), with additional cable screen external diameter approx. 4 mm, price per meter

PVC-lines (-20 ... +70 °C)

P2P

PVC cable, 2-pole (2 x 0.14 mm²), external diameter approx. 3.5 mm, price per meter

P4P

PVC cable, 4-pole (4 x 0.14 mm²), external diameter approx. 3.9 mm, price per meter

Extension cable for Type K (NiCr-Ni)

VKA 1m

Art. no. 602909

1 m Silicon-Compensation lines with DIN plug and DIN coupler
Upcharge per meter

Compensation lines for NiCr-Ni (type K), 2-wire

AGL1

Silicone cable (2 x 0.22 mm²) (max. 200 °C), external diameter approx. 3.8 mm, price per meter

AGL3

Thermo wire (can also be used as thermo couple) glass silk (2 x 0.5 mm²) (max. 400 °C), external diameter approx. 4 mm, price per meter

AGL4

Teflon screened twisted thermo wire without joint outer sheath, wire Ø 0.2 mm (max. 250 °C), external diameter approx. 1.4 mm, price per meter

AGL5

Thermo wire, with glass silk braiding, wire-Ø 0.2 mm (max. 400 °C), external diameter 0.8 x 1.2 mm, price per meter

AGL6

Teflon cable, screened - can also be used as thermo couple (2 x 0.22 mm²) (max. 250 °C), with additional cable screen, external diameter approx. 4 mm, price per meter

Compensation lines for Pt10RH-Pt (Type S), 2-wire

AGL S2

Silicone cable (max. 200 °C), external diameter approx. 3.9 mm
price per meter

Compensation lines for NiCrSi-NiSi (Type N), 2-wire

AGL N2

Silicone cable (max. 200 °C), external diameter approx. 3.9 mm
price per meter

SENSOR ELEMENTS (PT100 / 1000, NTC, PTC)



Pt100/1

Art. no. 602989

Ceramic lamina, 2 x 2.3 x 0.6 mm, -70 ... +500 °C, accuracy class F 0.3 (DIN class B)

Pt100/2

Art. no. 602990

Ceramic lamina, 2.5 x 2.0 x 1.3 mm, -50 ... +500 °C, accuracy class F 0.1 (DIN class AA (1/3 class B))

Pt100/3

Art. no. 602991

Ceramic lamina, 2 x 5 x 0.9 mm, -196 ... +500 °C, accuracy class F 0.3 (DIN class B)

Pt100/4

Art. no. 602993

Wound design, Ø 2 x 20 mm, -200 ... +600 °C, accuracy class W 0.3 (DIN class B)

Pt100/5

Art. no. 602994

TO92-housing, -50 ... +150 °C, accuracy class F 0.3 (DIN class B)

Pt100/6

Art. no. 602995

Ceramic lamina, 1 x 3 x 0.6 mm, -50 ... +500 °C, accuracy class F 0.3 (DIN class B)

Pt1000/1

Art. no. 606368

Ceramic lamina, 2.1 x 4 x 0.9 mm, -70 ... +500 °C, accuracy class F 0.1 (DIN class AA (1/3 class B))

Pt1000/2

Art. no. 602997

TO92-housing, -50 ... +150 °C, accuracy class F 0.3 (DIN class B)

Pt1000/3

Art. no. 602998

Ceramic lamina, 1 x 3 x 0.6 mm, -50 ... +500 °C, accuracy class F 0.3 (DIN class B)

KTY 81-210

Art. no. 607894

Replacement for KTY 11-6, -20 ... +110 °C

KTY 81-121

Art. no. 607895

1 kOhm (25 °C), TO92-housing, -50 ... +150 °C

For larger quantities special prizes - upon request

ALARM / PROTECTION, LEVEL



	ALSCHU 300 FG ALSCHU 300 SP	ALSCHU 485	ALSCHU 485 OE ALSCHU 485 OE / 3P	GEWAS 181 A GEWAS 183 A GEWAS 181 A - 1/2" - 3/4" - 1"	ALSCHU 480 ALSCHU 480 P	GEWAS 200	GEWAS 300 FG GEWAS 300 SP
APPLICATION:							
Universal application	•				•	•	•
Level controler	•	•	•				
Water leak detector				•	•	•	•
Electrodes incl.		•		•			•
Alarm buzzer		•	•	•	•		
Switching output	•	•	•	•	•	•	• / -
Water supply is switched off				•			•

DEVICE INFORMATION:

Catalogue page	Page 222	Page 222	Page 222	Page 226	Page 227	Page 224	Page 224
----------------	----------	----------	----------	----------	----------	----------	----------

	GEWAS 191 N	GEWAS 191 AN	GNS-SCV-W GNS-SCV-Z	GNS-KIT	GNS-C1 GNS-C2	RWI-016 PPK RWI-016 PVK RW-015 HKL	GSS-F25
APPLICATION:							
Universal application							
Level controler				•			
Water leak detector	•	•					
Level Switch	•	•	•		•	•	•
Electrodes incl.	•	•		•			
Alarm buzzer		•					
Switching output	•	•	•	•	•	•	•

APPLICATION:

Universal application

Level controler

Water leak detector

Level Switch

Electrodes incl.

Alarm buzzer

Switching output

DEVICE INFORMATION:

Catalogue page	Page 225	Page 225	Page 228	Page 228	Page 229	Page 229	Page 229
----------------	----------	----------	----------	----------	----------	----------	----------

ELECTRODE CONTROLLER / LEVEL CONTROLLER



ALSCHU 300 FG



ALSCHU 300 SP

ALSCHU 300 FG

Art. no. 600476

Electrode controller in field frame for wall mounting, device without sensor

ALSCHU 300 SP

Art. no. 600479

Electrode controller in snap-on housing for DIN rail mounting, device without sensor

Application:

Automatic control of drainage pumps and wastewater lifting plants, overflow and low liquid level control, automatic filling and draining of tanks, level control of liquid reservoirs, aquariums, storage tanks, etc.

The ALSCHU 300 .. is especially suitable for detection of conducting media (water, etc.). It is less applicable for badly or non conducting media (oils or fatty liquids), conducting foaming liquids or media causing electrically isolating deposits on the electrodes.

Measuring method:

The measuring method for level detection is based on the conductive principle, i.e. the electrical conductivity of the media is monitored. If the switching amplifier detects a value below the set conductivity the state "media detected" is output, otherwise "no media". Depending on number and design of the connected level sensors the device can be used for level detection (min-/max-detection) or as 2-point controller.

Specifications:**Power supply:** 18 V ... 250 V AC/DC wide-range power supply**Power consumption:** <2 VA**2 signal inputs:****Triggering level:** <80 kΩ**Response time:** 2 s**1 Relay output:****Contact:** change-over contact, potential-free**Switching voltage:** ≤250 V AC**Switching current:** ≤5 A (ohmic load)**Protection class:** IP20 (ALSCHU 300 SP) or IP65 (ALSCHU 300 FG)**Working temperature:** -20 ... +60 °C, <75 % RH (non condensing)**Storage temperature:** -40 ... +80 °C**Condensation:** not allowed**Functions / displays:****Red / green LED:** display for switching state of relay, switching state of sensors, status (supply) of device**Housing:****ALSCHU 300 SP:** 22.5 x 75 x 110 mm (W x H x D)**ALSCHU 300 FG:** 100 x 100 x 60 mm (W x H x D without PG cable glands)**Scope of supply:** Device, manual**Accessories and spare parts:**

Sensors see page 223

ELECTRODE CONTROLLER / LEVEL CONTROLLER

**ALSCHU 485**

Art. no. 603479

Electrode control device for filling or emptying, incl. two 2-pin. electrodes

ALSCHU 485 OE

Art. no. 603807

(as above, but without electrodes - connection for two 2-pin. electrodes)

ALSCHU 485 OE/3P

Art. no. 603808

(as above, but without electrodes - connection for 3-pin electrodes)

Application:

Automatic control of drain pumps and sewage removal plants, overflow and dry running protection, automatic filling and emptying of containers, basins, tanks, control of liquid level in storage tanks, aquariums, etc.

Specifications:**Control device:** Flashing LED indicating control state. Selector switch for emptying or filling. Plug-in socket for electrodes.**Power supply:** control device 230 V 50 Hz (approx. 1 VA), automatic by connecting grounded adaptor plug.**Control output:** via grounded adaptor plug with earthing and socket outlet with earthing, electrode control. Direct switching capacity approx. 1200 VA at 230 V 50 Hz (approx. 5 A ohmic load). Extra high protective capacity by external triggering of a contactor or semiconductor relay.**Electrode connection****ALSCHU 485:** 2 x 2.5 mm jack sockets, 2 electrodes with stainless steel pins, plastic body with PVC cable (2 m long) included (any length available upon surcharge)**ALSCHU 485 OE:** 2 x 2.5 mm jack sockets**ALSCHU 485 OE / 3P:** 3-pole screw terminal**Dimensions housing:** 112 x 71 x 48 mm (L x W x D)**Scope of supply:** Device, manual, only ALSCHU 485: 2 electrodes**Accessories and spare parts:**

Sensors see page 223

3-PIN. PROBE FOR LEVEL CONTROL (CONDUCTIVE)

**GNS-3P**

Art. no. 603170

3-pin. level probe

General:

- For all industrial applications
- Alarm-, Level- and Doseregulation
- Optional teflon covered staffs
- Combined with control electronics (ALSCHU 300, ALSCHU 485 OE / 3P or MINAL) an accurate liquids level control system

Specifications:

Number of electrodes:	3 pieces
Length of electrodes:	150 mm, other lengths upon request, probes can be cutted to needed length, in order to be adapted to local conditions.
Electrical connection:	2 m cable
Switching distance:	10 mm
Dimensions:	
Electrode length:	150 mm
Electrode diameter:	3 mm
Electronics box:	55 x 35 mm (W x H)
Scope of supply:	Device, manual

Option:**other length available****Teflon covered staffs**

only tip is uncovered (for electrodes used in salt water, ...)

Suitable for:

Alschu 300 FG, Alschu 300 SP, ALSCHU 485 OE / 3P

3-PIN. PROBE FOR LEVEL CONTROL (CONDUCTIVE)

**GNS-3P-SLV**

Art. no. 604786

3 electrodes with Poliolefin coating

- cooling water
- all conductive liquids

GNS-3P-SLK

Art. no. 604016

3 electrodes with Kynar coating

- food and beverage industry
- chemical industry

GNS-3P-SLE

Art. no. 603172

3 electrodes with PTFE coating


- aggressive conductive liquids

General:

- Coated electrodes
- Rugged construction, sealed
- Alarm or level regulation or dosage of liquids
- Combined with control electronics (ALSCHU 300, ALSCHU 485 OE / 3P) an accurate liquids level control system

Specifications:

Number of electrodes:	3 pieces
Length of electrodes:	500 mm, other lengths upon request, probes can be cutted to needed length, in order to be adapted to local conditions.
Electrical connection:	elbow-type plug acc. to EN 175301-803/A
Process connection:	G 1", Polypropylen
Pressure max.:	6 bar
Temperature max.:	+100 °C
Protection rating:	IP65
Dimensions:	SW: 40 mm A: 68 mm B: 20 mm L: 500 mm

**Scope of supply:** Device, manual**Suitable for:**

Alschu 300 FG, Alschu 300 SP, ALSCHU 485 OE / 3P

WATER MONITOR WITH ONE SIGNAL INPUT AND ONE RELAY OUTPUT



GEWAS 300 FG



GEWAS 300 SP

GEWAS 300 FG

Art. no. 600472

Water monitor in field frame for wall mounting, device without sensor

GEWAS 300 SP

Art. no. 600474

Water monitor in snap-on housing for DIN rail mounting, device without sensor

General:

The measuring method for level detection is based on the conductive principle, i.e. the electrical conductivity of the media is monitored. If the switching amplifier detects a value below the set conductivity the state "media detected" is output, otherwise "no media".

Application:

Versatile alarm and protection device for DIN rail or surface mounting with universal input (screw-type terminals) for several external sensors. Sensors with switching threshold <100 kOhm can be connected (e.g. water probes, floating switches, level probes, magnetic contacts, etc.). In case of an alarm the connected device (e.g. pump, machine) is switched off by a change-over contact. The GEWAS 300 FG additionally provides an alarm. The internal or an external push-button resets the alarm state.

The GEWAS 300 ... is especially suitable for detection of conducting media (water, etc.). It is less applicable for badly or non conducting media (oils or fatty liquids), conducting foaming liquids or media causing electrically isolating deposits on the electrodes.

Specifications:

Power supply: 18 V ... 250 V AC/DC, wide-range power supply

Power consumption: <2 VA

1 signal inputs:

Triggering level: <80 kΩ

Response time: 2 s

1 Relay output:

Contact: change-over contact, potential-free

Switching voltage: ≤250 V AC

Switching current: ≤5 A (ohmic load)

external alarm output:

only GEWAS 300 FG: 8 V, 3 kHz, ≤5 mA

Protection class:

GEWAS 300 SP: IP20

GEWAS 300 FG: IP65

Working temperature: -20 ... +60 °C

Storage temperature: -40 ... +80 °C

Condensation: not allowed

Functions / displays:

Red / green LED: display for switching state of relay, switching state of sensors, status (supply) of device, status of battery

Acoustic alarm: internal alarm buzzer with battery back-up (only for GEWAS 300 FG)

Battery back-up: Monitoring and acoustic alarm are ensured even e.g. during power failures (only for GEWAS 300 FG)

Alarm reset: alarm reset by GEWAS 300 SP:
connection for external push-button
GEWAS 300 FG: push-button at front side

Housing:

GEWAS 300 SP: 22.5 x 75 x 110 mm (W x H x D)

GEWAS 300 FG: 100 x 100 x 60 mm (W x H x D) without PG cable glands

Scope of supply: Device, manual

Accessories and spare parts:

Sensors see page 225

PROTECTION DEVICE FOR UNIVERSAL APPLICATION

PANEL MOUNTED DEVICE
WITH SWITCHING OUTPUT

GEWAS 200

Art. no. 600279

Panel-mounted alarm protection device with volt-free relay output (snap-on mounting for top hat rail in special snap-on housing), without sensor

General:

The GEWAS 200 is a versatile DIN rail alarm and protection device. Its universal input (screw terminals) allows a lot of different external sensors to be connected. That includes sensors with a switching threshold <100 kOhm like water sensors, float switches, level switches, magnetic contacts, etc. A connected device (i.e. pump, machine) is switched on or off via potential-free change-over contact in case of an alarm. The alarm is reset by the use of an internal / external reset button.

Specifications:

Power supply: 220 / 240 V 50 / 60 Hz

Power consumption: approx. 3 VA

Sensor input: 2-pole screw terminal

Switching threshold: input resistance <100 kOhm (e. g. NPN no active, relay, reed contact, etc.)

Switching output: potential-free change-over contact

Switching power: 250 V AC, 10 A (ohmic load), max. 2400 VA
150 V DC, 2 A (ohmic load), max. 240 W

red / green LED: LED (green) for operation display
LED (red) for alarm condition

Mounting: universal foot base for all common DIN EN rails

Working conditions: -20 ... +50 °C and 0 ... 80 % RH

Dimensions: 49 x 96 x 59 mm (L x W x H)

Scope of supply: Device, manual

Options:

GEWAS 200 KL

Art. no. 600306

Screw terminal (2-pole) to connect an external reset button

GEWAS 200 AL

Art. no. 601041

Automatic alarm reset

Accessories and spare parts:

GWF-1

Art. no. 601712

water sensor without plug, 2 m

GSS-1

Art. no. 606016

level probe (plug-in float switch), 2 m cable for electrically non-conductive media (normally open/normally closed function can be selected by customer)

GNS-1

Art. no. 602531

plug-in level probe 2-pin (stainless steel electrodes)

WATER SENSOR

**GWF-1**

Art. no. 601712

Water sensor without plug, 2 m cable

Variants:**GWF-1/5m**

Art. no. 601717

Water sensor without plug, 5 m cable

GWF-1/10m

Art. no. 601723

Water sensor without plug, 10 m cable

Suitable for:

Gewas 200, Gewas 300 FG



FOR ULTRAPURE WATER

Textile tape at the reverse side of device

GWF-2

Art. no. 601778

Textile-tape water sensor, 2 m, without plug

Specifications:

Housing: made of ABS with two mounting holes and PG gland

Dimensions: 65 x 35 x 50 mm (L x W x H), without PG gland

Scope of supply: Device

Suitable for:

Gewas 200, Gewas 300 FG, Gewas 300 SG

2-POLE LEVEL SENSOR

**GNS-1**

Art. no. 602531

level sensor 2-pole, cable 2 m

WATER LEAK DETECTOR WITH SOLENOID VALVE



NO MORE WATER DAMAGE

GEWAS 191 N

Art. no. 601742

Water leak detector with solenoid valve, complete and ready for use

GEWAS 191 AN

Art. no. 601744

Water leak detector with solenoid valve, complete and ready for use with switch-off mechanism for supervised device in case of alarm (up to 16 A, 230 V 50 Hz)

General:

If a water film of more than 0.5 mm occurs at the water sensor the control unit automatically gives an acoustic alarm and switches the solenoid valve off. The design type GEWAS 191 AN turns off additionally the device connected to the control unit, too.

Application:

Washing machine, dish washer, surgeries (e.g. dentists' surgeries, water-cooled devices etc.), hospitals, industry, research, laboratories, any other devices and machines with water connection (e.g. hot drinks dispensers, cooling devices etc.)

Specifications:

Power supply: 220/240 V 50/60 Hz (control unit)

Power consumption: approx. 3 VA

Control output: via power socket at device housing (only for GEWAS 191 AN) the socket of GEWAS 191 N always provides mains voltage

max. switching current: max. 16 A (ohmic load)

Water sensor: highly sensitive plug-in water probe, 2 m cable. Alarm triggered as of ½ mm water film. Several water probes can be plugged-in and used simultaneously by means of socket outlet adaptor GAZ 1. 2 m, 5 m or 10 m plug-in extension cable available.

Solenoid valve: glass fiber reinforced polyamide (as customary for washing machines). Safety-low voltage 12 V DC. Connections: Screw connection ¾" for direct fastening to water tap and the standard dish washer / washing machine connection hose ½" with ¾" wing or coupling nut to the solenoid valve outlet. In case of power breakdown the valve closes automatically.

Working pressure:

6 bar servo-controlled; Minimal pressure difference between in- and outlet: inlet pressure min. 0.5 bar higher than outlet pressure

Device housing with electronics:

enclosed case (not suitable for use in humid environment), electronics, signal buzzer, plug connections for valve and water sensor. Housing with earthing pin plug connection and socket outlet with earthing contact. Looping-in socket outlet with earthing contact used for GEWAS 191 N; alarm controlled socket outlet with earthing contact used for GEWAS 191 AN

Working conditions: 0 ... 50 °C, 0 ... 90 % RH (non-condensing)

Dimensions: control unit: 126 x 79 x 54 mm (L x W x H)
solenoid valve: 82 x 102 x 41 mm

Scope of supply: Water leak detector with solenoid valve, controller, water probe, signal buzzer, manual

Accessories and spare parts:**GMV191**

Art. no. 601664

spare solenoid

GWF-1S

Art. no. 601706

plug-in water sensor, 2 m

GWF-1S / 5m

Art. no. 601708

plug-in water sensor, 5 m

GWF-1S / 10m

Art. no. 601710

plug-in water sensor, 10 m

GAZ-1

Art. no. 602748

branch adapter (required for each additional water sensor)

VEKA 2

Art. no. 601726

extension cable 2 m

VEKA 5

Art. no. 601728

extension cable 5 m

VEKA 10

Art. no. 601731

extension cable 10 m

Note:

Not suitable for ultrapure water!

LEAK-WATER DETECTOR



Figure GEWAS 181 A



NO MORE WATER
DAMAGE

GEWAS 181 A

Art. no. 601734

Leak-water detector with ½" brass solenoid valve with ¾" connections for hand installation, water sensor, alarm buzzer and switch-off of connected units 16 A, 230 V~

GEWAS 183 A

Art. no. 602999

Leak water detector without solenoid valve, with water sensor, alarm buzzer and switch-off of connected devices 16 A, 230 V~

GEWAS 181 A - ½"

Art. no. 601736

Leak water detector with ½" brass solenoid valve (flow quantity: approx. 20 l/min, installation length approx. 55 mm) for installation in the line, water sensor, alarm buzzer and switch-off of connected devices 16 A, 230 V~.

GEWAS 181 A - ¾"

Art. no. 601738

Leak water detector with ¾" brass solenoid valve (flow quantity: approx. 91.5 l/min, installation length approx. 80 mm) for installation in the line, water sensor, alarm buzzer and switch-off of connected devices 16 A, 230 V~

GEWAS 181 A - 1"

Art. no. 601740

Leak water detector with 1" brass solenoid valve (flow quantity: approx. 141.5 l/min, installation length approx. 95 mm) for installation in the line, water sensor, alarm buzzer and switch-off of connected devices 16 A, 230 V~

Application:

Any devices or machines with water connection. For direct mounting of solenoid valve in pipelines.

Mode of action:

If a water film of more than 0.5 mm occurs at the water sensor the control unit automatically gives an acoustic alarm and switches the solenoid valve and the device connected to the control unit off.

Solenoid valve:

Brass solenoid valve, energy-saving circuitry for hand installation (½" with ¾" glanding - suitable for any ½" tap or ½" tube) or with ½", ¾" or 1" internal thread on both sides for line installation. De-energised when closed, for pressure loads from 0.5 ... 10 bar. Servo-controlled, i.e. free water outlet has to be provided resp. infeed pressure has to exceed outfeed pressure by 0.5 bar (solenoid not suitable for closed circuits such as heating systems).

Specifications:

Power supply:	220 / 240 V 50 / 60 Hz (control unit)
Power consumption:	approx. 2.5 Watt (control unit, approx. 6 W incl. solenoid valve)
Control output:	via power socket of safety plug adapter
max. switching current:	max. 16 A (ohmic load)
Water sensor:	Highly sensitive, plug-in water sensor, 2 m of cable, alarm triggered as of ½ mm water film. Simultaneous plug in of several water sensors via socket-outlet adaptor GAZ1. Plug-in extension cable (2 m, 5 m or 10 m long) available.

Solenoid valve:

Hence, valve operable in permanent mode; due to energy-saving circuit valve will not run hot even without cooling agent. Valve permanently fixed to control device (approx. 1 m of connecting cable). Valve body can be removed from coil after loosening of one nut.

Max. working pressure:	10 bar, servo-controlled (pressure difference inlet/outlet >0.5 bar)
Working voltage:	200 V DC or 100 V DC in energy saving mode
Working temperature:	0 ... 50 °C
Dimensions:	control device: 110 x 65 x 45 mm (L x W x H), with suspension hook
Scope of supply:	Device, solenoid valve (not GEWAS 183 A), water sensor, manual

Accessories and spare parts:**GMV-½" L**

Art. no. 601645

Spare solenoid valve ½" for direct cable connection, approx. 1 m cable, loose ends

GMV-½" H

Art. no. 601646

spare solenoid valve ¾" manual mounting, approx. 1 m cable, loose ends

GMV-¾"

Art. no. 601648

spare solenoid valve ¾" for direct cable connection, approx. 1 m cable, loose ends

GMV-1"

Art. no. 601655

spare solenoid valve 1" for direct cable connection, approx. 1 m cable, loose ends

GMV-½" EZL

Art. no. 601657

add. solenoid valve 1/2" for direct cable connection, with power saving connector, approx. 2 W, for direct connection to 230 VAC, suitable for GEWAS 183A or mains operation

GMV-½" EZH

Art. no. 601660

like before, but ¾" valve for manual mounting

GMV-¾" EZ

Art. no. 601662

like before, but ¾" valve for direct cable connection

GMV-1" EZ

Art. no. 601650

like before, but 1" valve for direct cable connection

Plug-in water sensor, socket outlet adapter, extension cable p.r.t. GEWAS 191

PROTECTION DEVICE FOR UNIVERSAL APPLICATION



AVAILABLE AS PLUG-IN



WITH SWITCHING OUTPUT FOR ANY PURPOSE

ALSCHU 480

Art. no. 602921

Alarm protection device, plug-in for 230 V~ (with grounding contact adapter plug), with or without alarm transmitter and relay switching output (changeover contact)

ALSCHU 480 P

Art. no. 602923

as above, but with volt-free switching output and looped socket

General:

The ALSCHU 480(P) is a versatile alarm and protection device. Its universal input (3.5 mm jack bush) allows a lot of different external sensors to be connected. That includes sensors with a switching threshold <100 kOhm like water sensors, float switches, level switches, magnetic contacts, safety shut-off mat etc. In case of an alarm the internal buzzer sounds and a connected device (i.e. pump, machine) is switched on or off via the Schuko adaptor plug (ALSCHU 480). The desired switching function can be set via selector switch I / II. ALSCHU 480 P switches on/off external devices via a potential-free 2-pole switching output. The Schuko socket of ALSCHU 480 P is always current-carrying.

Specifications:

Voltage supply:	220 / 240 V 50 / 60 Hz
Power consumption:	approx. 1 VA
Sensor input:	2.5 mm jack bush
Switching threshold:	input resistance <100 kOhm (e.g. NPN no active, relay, reed contact, etc.)

Switching output

480:	via isolated ground receptacle
480 P:	potential-free normally open/closed contact via 2-pole cable, brought out 0.5 m

Switching function

I:	switching output current-carrying in alarm condition
II:	switching output currentless in alarm condition

Switching power

480, 480 P:	250 VAC, 10 A (ohmic load), max. 2400 VA
480 P:	120 VDC, 2 A (ohmic load), max. 240 W

Controlling device: LED for operation display, device-on/off, selector switch I / II for switching function

Working conditions: -20 ... +50 °C; 0 ... 80 % RH

Dimensions: 112 x 71 x 48 (L x W x H)

Scope of supply: Device, manual

Accessories and spare parts:**GWF-1S**

Art. no. 601706

Plug-in water sensor, 2 m

ACCESSORIES

**GNS-1S**

Art. no. 602526

plug-in level probe 2-pin

General:

PVC body with 2 stainless steel pins, 2 m PVC cable and 2.5 mm jack plug

**GWF-1S**

Art. no. 601706

Plug-in high-sensitive water probe

General:

2 m cable length, with 2.5 mm jack plug; multiple water probes can be connected simultaneously with a GAZ-1 socket-outlet adapter



VEKA 5

VEKA 2

Art. no. 601726

Extension cable 2 m

VEKA 5

Art. no. 601728

Extension cable 5 m

VEKA 10

Art. no. 601731

Extension cable 10 m

General:

Connections:
1 x 2.5 mm jack plug, 1 x 2.5 mm jack socket

**GAZ-1**

Art. no. 602748

branch adapter

General:

with 2 x 2.5 mm jack socket and 1 x 2.5 mm jack plug; required for each additional water sensor

DEVICE FOR MONITORING THE LEVEL (CAPACITIVE)



GNS-SCV-W

Art. no. 603168
Probe for application in water and all conductive liquids

GNS-SCV-Z

Art. no. 603169
Probe for application in oil and all no-conductive liquids

General:

The GNS-SCV capacitive probes are the best way to monitor the level condition of liquids as water, oil gasoline and solid products as powder and granular.

- Sealed
- No moving parts
- very reliable

Application:


- Water
- Oil
- Gasoline
- Solid products as powder or granular

Specifications:

Power supply:	12 ... 35 V DC / 5 mA
Switch output:	NPN no-active / max. 3 W
Electrical connection:	elbow-type plug acc. to EN 175301-803/A
Process connection:	1/4" NPT, brass
Switch delay:	4 s
Electrode:	Cu-Zn
Electrode coating:	PTFE
Electrode length:	50 mm
Switch point	
40 mm ±2 mm:	vertical mounting
on the axis of SCV:	horizontal mounting
Pressure max.:	25 bar
Temperature max.:	-30 ... +125 °C

Dimensions [mm]:

SW	A	B	L0	L1
24	74	10	50	40 ±2

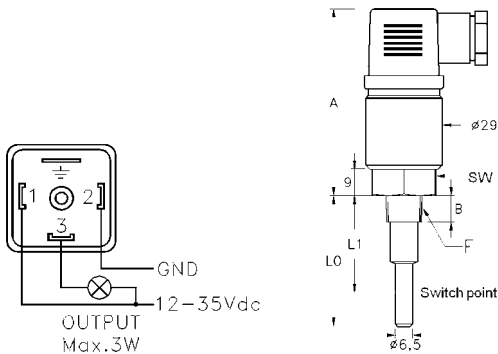

LEVEL SWITCH



GNS-KIT

Art. no. 603164
Level switch, without rod tube (state rod tube length when ordering)

General:

The user can add by himself the level switch in the desired length (500 mm, 1000 mm or 1500 mm) the rod tube between the process connection and the float contact unit.

- Sealed under water protected contact
- Rod tube in 500 mm / 1000 mm / 1500 mm available state when ordering
- IP65 protection class

Specifications:

Float-contact unit:	Nickel plated brass
Density:	>0,35 g/cm³
Pressure max.:	20 bar
Temperature max.:	105 °C
Connection:	1/8"
Reed-contact:	SPDT: 230 V, 60 VA, 1,0 A
Process connection:	Thread G1", brass
Electrical connecton:	Plug EN 175301-803/A
Protection rating:	IP65
Seal:	NBR, oil resistant
Rod-tube:	Ø 8 mm, brass

Accessories and spare parts:

GNS ROHR-0500


Art. no. 603165
Rod-tube for GNS KIT, 500 mm

GNS ROHR-1000

Art. no. 603166
Rod-tube for GNS KIT, 1000 mm

GNS ROHR-1500

Art. no. 603167
Rod-tube for GNS KIT, 1500 mm

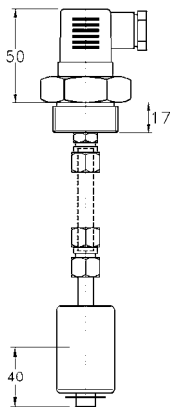

HANDHELD INSTRUMENT

DISPLAY / CONTROLLER

LOGGER- / BUS SYSTEMS

TRANSMITTER

TEMPERATURE PROBE

ALARM / PROTECTION, LEVEL

INDEX

A-10	181	ESA 369	78	GFTH 95	43	GMH 56...	68
A9648	125	EST...	219	GFTH 200 ...	43	GMH 56x0-L0x	70
AAA-AKKU	113	ET2011	130	GGA...	77	GMH 569...	75
AAG...	113			GGF 175	22	GMI 15	45
ACCREDIA	14	FS3T	117	GGF 200	34	GMK 38	48
AF500	199	FT500	200	GGO ...	77	GMK 100	46
AGL ...	220	FW1-...GP	192	GHE 91	48	GMK 210	46
AKL 1P	152			GHM-ONE MSR 9696 H	136/137	GMK 3810	50
ALARM 230 V	134	G 14x0	59	GHM SensorSimulatorSIM-1	106	GMR 110	50
ALSCHU 300 ...	222	G 150x	64	GHTU ...	180	GMS 300/91	48
ALSCHU 480	227	G 1501-SET	63	GIA 010 N ...	115	GMSD ...	88
ALSCHU 485	222	G 1610	71	GIA 0420 N ...	115	GMUD MP	180
AP-47...	113	G 1700	21	GIA 0420 VO ...	132	GMV...	226
APG ...	134	G 17x0	24	GIA 0420 WK-T ...	132	GMZ 38	48
		G4P	220	GIA 20 EB ...	117	GNG 05 / 5000	113
BaleCheck ...	51	GAD 1 BNC	60	GIA 2000	121	GNG 10	113
BAT 40	81	GAF 200	34	GIA 2448 ...	116	GNG 10/3000	113
BAT 40-1	112	GAK 9 V	113	GIM 530 MS	37	GNG 12/ ...	135
BW500	196	GAK 1400	66	GIM 3590	38	GNG 24/ ...	135
		GAM 3000	113	GIR 2000 Pt ...	124	GNG 220 ...	135
CaCl	66	GAS 100	80	GIR 230 ...	118	GNR 10	135
CP-23	81	GAS 3600	72	GIR 2002	122	GNR 232	153
CP-9509-...	106	GAS 5610	68	GIR 2002 NS / DIF ...	124	GNS-1	225
CPA/10	95	GAZ-1	227	GIR 2002 PID	122	GNS-1S	227
CR 2032	140	GB 9 V	113	GIR 300	119	GNS-3P ...	223
CT500	194	GB AA	113	GIR 360	120	GNS-KIT	228
CT500P	199	GBF 1550	35	GITT 01 ...	172	GNS-C ...	229
CVC-02/0201	201	GBS 01 / 02	182	GKF 125	33	GNS-SCV ...	228
CVG500	196	GBSK 91	48	GKF 250	35	GODOX-200	189
CVT500	195	GBSL 91	48	GKK ...	111	GOEL ...	78
		GCO 100	80	GKL ...	59	GOF 112 ...	218
DAkKS	14	GDH 200 ...	93	GKV ...	219	GOF 115 ...	218
DFG 70	187	GDU5B 1000	87	GLF 100 ...	58	GOF 120 ...	218
DO9709-SS-...	73	GDU5B FastView	87	GLF 175 ...	22	GOF 130 ...	32/33
DPP 15	135	GDZ ...	86	GLF 401 Mini	19	GOF 175 ...	22
DTP35N-1-3-C	157	GE 1 ...	65/66	GLMU ...	186	GOF 200 HO	32
		GEAK- ...	66	GLP 91	48	GOF 400 ...	32
E-NTC-...	130	GEE 771 C- ...	182	GLS 500	35	GOF 401 Mini	19
EAK 36	121	GEF 38	48	GMF 2...	34	GOF 500 ...	33
EASYBUS.DLL	110	GEG 91	48	GMH 1150	30	GOF 900 HO	32
EASYControl net	108	GES 20	21	GMH 1170	30	GOG ...	79
EASYLOG 40BIN	144	GES 20 K	33	GMH 1300	114	GOK 91	48
EASYLOG 40IMP ...	144	GES 21 K	33	GMH 2710 ...	27	GOO ...	77
EASYLOG 40NS ...	143	GES 38	49	GMH 3000.DLL	110	GOX 20	70
EASYLOG 80CL...	143	GES 130	33	GMH 3111 ...	84	GOX 100 ...	78
EASYLOG 80K	142	GES 175 ...	22	GMH 3151 / 56 ...	84	GPAD 38	49
EASYLOG 80KH	142	GES 401 ...	19	GMH 3161 / 81...	91/92	GPB 3300	94
EB3000	150	GES 500	33	GMH 32 ...	28/29	GPF 100	66
EB3000 FR	151	GES 900	33	GMH 33 ...	40	GPH 114	62
EBB...	153	GEWAS 18 ...	226	GMH 34...	57	GPH ...	66
EBG-CO2-1R	150	GEWAS 191 ...	225	GMH 35 ...	60	GPHU 014 MP ...	189
EBHT...	147	GEWAS 200	224	GMH 3611 / 51	72	GR 1...	66
EBHT-2R...	148	GEWAS 300	224	GMH 369 ...	76	GR 10	135
EBN/...	149	GF 1T-E1.5...	23	GMH 3710 / 50	20	GRA 010 VO	133
EBS 20M / 60M	108	GF 1T-E3...	23	GMH 37x0/SET...	20	GRA 0420 VO	133
EBSK...	152	GF 1T-T3...	22/23	GMH 37x0/DKD1	20	GRA 010 WK	133
EBT...	146	GF 1T-L3...	23	GMH 38-LW...	49	GRA 0420 WK	133
EBT-2R...	148	GF 1TK-E1.5	35	GMH 3810	50	GRF 200	34
EBT-IF...	149	GF 1TK-E3	35	GMH 3831 / 51	47	GRHU ...	177
EBW ...	151/152	GF 1TK-L3	35	GMH 51 ...	83/84	GRL 100	66
ECO-SURE-2E-CO	81	GF 1TK-T3	35	GMH 54 ...	54	GRMU 2000 MP...	190
ecotach	104	GF 2T-E...	23	GMH 54x0-4xx	56	GRO 200 ...	214
EDT 24...	130	GF 3T-E3	23	GMH 55 ...	61/62	GRP 100	66
ESA 100	80	GFTB 200 ...	42	GMH 55 ES	62	GRV 100	80

INDEX

GRS 31 ...	113	GWF-1S	227	MAXVU...	129	TV 125L	197
GS125	198	GWF-2	225	MINICAN-12-A-0	81	TV 125 M/ST 125 M	204
GS 150	78	GWH...	152	MINIDIN 4S	113	TV 500/ST 500	197
GSA ...	113	GWL 10G	219	MSD ...	89		
GSE 91	48	GWO 3600	72	MSK 100	80	US2-...	192
GSF 40	49	GWO 3600-...-MU	188	MT 400	37	USB 100	140
GSF 50	48	GWO 5610	68	MU 125	202	USB 3100 N	113
GSG 91	48	GWOK 01	70	MU 500 ...	173	USB 5100	113
GSH 8922	104	GWOK 02	70			USB 5200	113
GSKA 36x0	68	GWZ-01	59	NKU 1 ...	219	USB-Adapter	113
GSM-3000	152	GZ-...	80	Noise Studio NS4	95	UT 125	203
GSMU 671	184	GZ-11	78	NST 1...	219	UZ9648	126
GSOFT 40K	109						
GSOFT 3050	109	HayTemp 1700	25	OB-700	218	V9648	125
GSP 91...	48	HD-2020	96	OXY 36 ...	185 / 189	VD 120	66
GSS-F25	229	HD-2010-UC-1	95			VEKA ...	227
GST ...	48	HD-2101-...	67	P2P, P4P	220	VEKA 3105	113
GST 3810	50	HD-2110-CSNM	112	PG 13.5	66	VISION 2008	190
GT10-CO2-1R	184	HD-2110-RS	112	pH40	200	VSL 2P	152
GTD 1100	94	HD-2110-USB	95	pH9648	127	VKA 1m	220
GTE 130 OK	35	HD-22-3	114	PHL ...	66	VT500	195
GTF 35	19	HD-2302-0	96	Prandtl-Staurohr	84	VKMU-M12	187
GTF 38	49	HD-2303-0	103	Pt 100 ...	220		
GTF 101 ...	208/209	HD 31	100	PW 25	46	WD...D...	128
GTF 101 - EX	214	HD 31.28	101			WLAN 3200	112
GTF 101-5- ...	207	HD-33-...	81	RCT	112	WM500	194
GTF 101-N0 ...	113	HD-3409-2	73	ResOx 5695-...	79	WS...D...	128
GTF 102	210	HD-3456-2	67	rotaro3	104	WP...D...	134
GTF 102 - EX	215	HD-37-...	81	RRI-0...	193		
GTF 103	211	HD-40-1	112	RT 420 ...	171	ZOT 369	80
GTF 103 - EX	215	HD-9609	106	RW-015HKL	229		
GTF 111	212	HD208L...	164	RWI-016 ...	229		
GTF 111-EX	216	HD21-ABE-17	81				
GTF 112	212	HD2101-USB	73	S2P, S4P	220		
GTF 112-EX	216	HD2110-RS	95	S-10/S-11/S-20 ...	181		
GTF 175 ...	21	HD2178.2	31	SD9648	129		
GTF 200 Pt100 ...	214	HD29-0-3-T	183	SET 38...	49		
GTF 230 S	118	HD32-8-16	29	SET-GMH5450	56		
GTF 300 ...	34	HD35-...	156-163	SET-GMH5550	73		
GTF 400	32	HD46-.../HD45-...	179	SET-GMH5650	69		
GTF 401 ...	19	HD4817...	175	SoilTemp 1700	25		
GTF 601 ...	19	HD900...	176	SP-06-T	67		
GTF 900	32	Hutschienenadapter	170	SP-T01-G	67		
GTF 1000 AL	32			ST 512	38		
GTF 1200 ...	32	IR-CT 20	174	ST ...	112		
GTF 2000	22	ISO-...	15	STE ...	41		
GTH 175 PT ...	26			STS 0...	41		
GTH 200 air	20	K 50..	114	SWD-05	101		
GTH 1150	30	KCL 3 M	66	SWD-10	67		
GTH 1170	30	KFZ 2000	116				
GTH 2448/ ...	116	KM-1 .../-3 ...	131	T2P, T4P	220		
GTL	213	KM4P ...	188	T03 BU /WE	170		
GTL 130	33	KOH 100	68	TA9648	126		
GTMU - AP ...	168	KTY 8 ...	220	TC 500	169		
GTMU - IF ...	170			TF 101 ...	217		
GTMU-MP ...	167	LABO-D...	191	TFS 0100 E	41		
GTO 130 OK	35	LABO-F012	193	T-Logg 100 ...	140		
GTP-SG	169	LAN 3200	112	T-Logg 120 ...	141		
GTT...	206	LC ...	191	T-Logg 160 ...	141		



Fields of expertise

- Compact, robust and powerful hand-held measurement technology „Made in Germany“
- Extensive product range for a wide variety of measured values
- Application-oriented special measuring devices
- Private-label products for customer-specific individualisation
- On customer request, factory calibration in our in-house calibration laboratory
- Tailor-made sensor designs from our state-of-the-art in-house sensor manufacturing organisation
- Price-conscious displays and regulators
- Hand-held devices and sensors with high system accuracy
- Quick measuring systems based on thermocouples and Pt100/Pt1000 elements
- EASYBus system for simple network
- Temperature sensors for hygienic applications
- Solutions for hazardous areas (ATEX)



dystybutur:

Scuba Mission Rafał Kowalewski
ul. Mazurska 7
70-424 Szczecin, Poland
tel./fax + 48 91 488 17 87
www.scubamission.pl
info@scubamission.pl

Catalog prices effective from 01.01.2018 | Errors, changes and price adjustments excepted. | All prices exclude shipping and sales tax.
Our terms and conditions can be found in the internet at www.ghm-group.de/agb/.

01/2018

GREISINGER



Product catalog 2018

Professional Measurement Measuring | Controlling | Regulating

Product catalog 2018

Members of GHM GROUP:

GREISINGER
HONSBERG
Martens
IMTRON
Delta OHM
VAL.CO